# Built-in and Freestanding Appliances

**Siemens Home Appliances** 

2024 01160

SILVIENS

# SIEMENS

# Introducing coordinated and intelligently designed appliances by Siemens

design and style.

Offering the perfect balance between modern design and innovative technology our range offers different value classes including iQ700; pliances with eye-catching design, cutting-edge technology and ger displays. Our iQ500 range brings the latest innovations and sleek designs offering first-class appliances for any home. iQ300 and iQ100 offer more affordable options with equally tasteful

Discover the entire built-in range – for even more flexibility as well as time – and resource-saving solutions which help support increasingly busy lifestyles. Siemens appliances include ovens that recommend the best programme to use for a dish with the Oven Assistant, dishwashers that feature the world's only Zeolith® drying system; a technological innovation that sets new standards for performance and energy efficiency. In addition our range features fridges with hyperFresh food preservation system to help keep food fresh for longer and outstanding freezers that never have to be defrosted. Not to mention A-rated freestanding washing machines that run more sustainably without compromising on performance. All working together to create an intelligently connected kitchen and utility space in the home.

# A perfect union of intelligent technology and outstanding design

Get the best of both worlds, with appliances that are as clever as they are beautiful.



Stunning design and high quality materials come as standard with all Siemens appliances.

They have been engineered and designed in Germany to deliver quality, durability and reliability.



With more than 340 engineers across the UK, all employed and trained by us, our engineers have unrivalled knowledge in repairing our appliances. Each team member goes though over 400 hours of training before attending customer call outs, for added peace of mind.



In 2023, Siemens was awarded the D&G Total Excellence and Quality award. This award is based on surveys sent to customers of most of the major home appliance manufacturers and confirms our commitment to offering Siemens customers the very best service.



The World Health Organisation research shows that environmental noise pollution affects mental and physical health and is now second only to air pollution as the world's largest killer pollutant. An independent scheme, Quiet Mark acoustically tests products to enable consumers to easily identify quieter products for the home, which will benefit health and wellbeing. Find out more on pages 8-9.



### Design is in our DNA.

Siemens Home Appliances' dedication to design excellence has been richly rewarded in the past year with numerous iF Design Awards, German Design Awards, Red Dot Design awards and Which? Award. Delivering a range of appliances equipped with smart technology, unparalleled user experience, and lasting, clear design aesthetics.



The IF Design Award.

The iF Design Award has been recognising cuttingedge product design around the globe for over 70 years receiving over 6,000 submissions from 70 countries annually.

#### The Red Dot Design Award.


The Red Dot Design Award, born in Essen (Germany) in 1955, has grown to be one of the most acclaimed product design awards in the world today.

#### The German Design Award.

The German Design Award is considered to be one of the world's most distinguished design competitions.

#### Which? Best Buy endorsement.

The Best Buy endorsement is given only to products and services proven to serve the consumer best in their independent lab tests and expert assessments. These toprated products have all satisfied or exceeded their expert criteria, based on the results of rigorous comparative tests and analysis carried out by Which?.The Best Buy recommendation is 100% independent - no company can nominate its own products for a Best Buy endorsement. Their tests are based on criteria and benchmarks set by impartial experts.

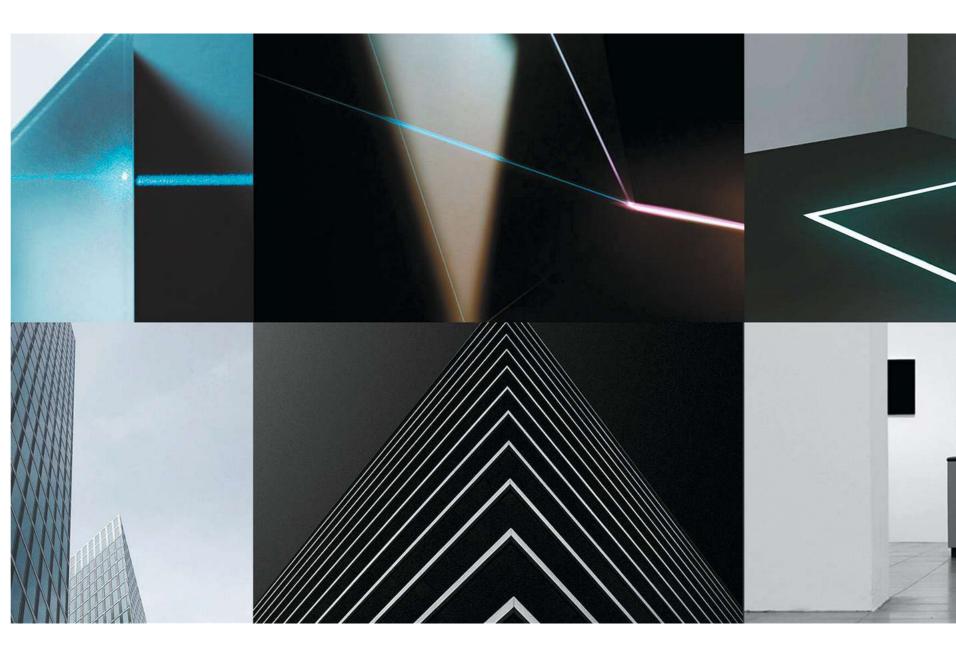

### Added peace of mind.



Siemens offers a 2 year warranty as standard across our built-in and freestanding range for added peace of mind. To register warranty please refer to the information on page 294. From time to time, Siemens may present additional warranties such as 5 year warranty on either products or defined components of a product which are time limited offers, to check if a product qualifies, please contact us, or go online at siemens-home.bsh-group.com/uk/ customer-service/siemens-warranties

and dishwasher appliances.



GERMAN DESIGN AWARD

In addition to the standard manufacturer warranty, our appliances also offer longer warranties on certain parts. This includes a 10 Year Anti-Rust warranty on all dishwashers, a 10 Year Compressor Drive warranty on selected cooling appliances, a 10 Year iQdrive® warranty on selected washing machines and lifetime AquaStop warranty on selected laundry

For further details, please refer to pages 295 or visit our Siemens Home UK or Ireland website.

# Welcome home

### The virtualBrochure

We have developed an innovative virtualBrochure app which brings the Siemens product range to life, giving full control of the products, allowing for rotation, zoom and interaction with the appliances.

The Augmented Reality feature within the app also allows to visualise our appliances within a room. Perfect for when planning a kitchen.

The app is available from the Apple Store and Google Play.









Like and follow us on social media for the latest updates about our products, features and innovations.

> Search SiemensHomeUK or SiemensHomelE



Or visit our website at siemens-home.bsh-group.com/uk or siemens-home.bsh-group.com/ie to find out more about our products and current offers.



Pyrolytic single ovens32-33Single ovens34-37Double ovens38-39Compact ovens40-42Microwaves44-47Warming drawers48-49Accessories51Coffee centre and coffee machines52-57Technical diagrams58-65HODS66-119inductionAir Plus hobs88-89flexInduction hobs97-99quicklite ceramic hobs102-103Gas hobs106-109Domino hobs110-111Technical diagrams112-118Hoods120-153Worktop ventilation134-135inductionAir Plus hobs136-137Decorative hoods136-137Decorative hoods140-141Integrated design hoods142-143Telescopic hood144Integrated design hoods146-147Technical diagrams116-111Wine cabinets172-173Fridge freezers – noFrost174-177Fridge freezers – noFrost174-177Fridge freezers – noFrost174-177Fridge freezers – noFrost174-177Fridge freezers – lowFrost180-185Technical diagrams246-247Muit-door / American Style fridge freezer214-217Traditional American Style fridge freezer214-217Traditional American Style fridge freezer214-217Traditional American Style fridge freezer214-224Upright single door fridges224-224445cm slimine dishwashers245-227 </th <th>Cooking</th> <th>10-65</th>	Cooking	10-65
Single ovens         34-37           Double ovens         38-39           Compact ovens         40-42           Microwaves         44-47           Warming drawers         48-49           Accessories         51           Coffece centre and coffee machines         52-57           Technical diagrams         58-65           Hobs         66-119           inductionAir Plus hobs         88-89           flexInduction hobs         97-99           quickLite ceramic hobs         102-103           Gas hobs         106-109           Domino hobs         110-111           Technical diagrams         112-118           HOCdS         120-153           Worktop ventilation         134-135           Decorative hoods         144-141           Integrated hood         144           Integrated hood         144           Integrated hood         144           Canopy hoods         146-147           Technical diagrams         186-137           Decorative hoods         142-143           Integrated hood         144           Integrated hood         144           Canopy hoods         146-147	Pyrolytic single ovens	32-33
Compact ovens         40-42           Microwaves         44-47           Microwaves         44-47           Accessories         51           Coffee centre and coffee machines         52-57           Technical diagrams         58-65           HObS         66-119           inductionAir Plus hobs         94-96           Induction hobs         97-99           quickLite ceramic hobs         102-103           Gas hobs         106-109           Domino hobs         112-111           HoodS         120-153           Worktop ventilation         134-135           inductionAir Plus hobs         136-137           Decorative hoods         138-139           Box chimmey hoods         142-143           Telescopic hood         144           Integrated hood         145           Canopy hoods         146-147           Technical diagrams         172-173           Pridge freezers - noFrost         172-173           Fridge freezers - noFrost         172-173           Pridge freezers - noFrost         174-177           Fridge freezers - noFrost         174-177           Pridge freezers         1004ros           Upright s		
Microwaves44-47 Warming drawers44-47 Waters48-49 WatersAccessories51Coffee centre and coffee machines52-57 Technical diagrams58-65Hobs66-119induction hobs88-89 flexInduction hobs97-99 quickLite ceramic hobsInduction hobs97-99 quickLite ceramic hobs102-103Sas hobs100-111 Technical diagrams110-111 Technical diagramsHoods120-153Worktop ventilation134-135 inductionAir Plus hobs136-137 Technical diagramsDecorative hoods138-139 Decorative hoods144-143 Telescopic hoodTelescopic hood144 Integrated design hoods146-147 Technical diagramsDecorative hoods172-173 Tridge freezers – noFrost172-173 Tridge freezers – noFrostPointeit172-173 Tridge freezers – noFrost172-173 Tridge freezers – noFrostPrestanding120-229Wine cabinet212-213 Multi-door / American Style fridge freezer214-217 Traditional American Style fridge freezerPridge freezers230-259Dishwashers246-247 ZefSorg ding door fridges224-225 ZefDright single door fridges224-225 ZefDishwashers258-259Laundry appliances260-291Built-in Washing machine266 ZefWasher dyers267 Technical diagramsZeferzer260-291Built-in Washing machines286-287 ZefWasher dyers267 Zef <td>Double ovens</td> <td>38-39</td>	Double ovens	38-39
Warming drawers48.49 Accessories48.49 51 Coffee centre and coffee machines51 57 57 57 Technical diagrams48.49 51 58.65Hobs66-119induction Air Plus hobs88.89 94.96 104uction hobs94.96 94.96 102.103 Gas hobs97.99 102.103 Gas hobsUnited ceramic hobs102.103 92.99Gas hobs102.103 102.103 Gas hobs102.103 102.103 Gas hobsWorktop ventilation134.135 114.1118Hoods120.0153Worktop ventilation134.135 136.137 Decorative hoods136.137 136.137 Decorative hoodsBox chimmey hoods142.143 144.141 Integrated design hoods142.143 144.143 145Cooling154-229Built-in Wine cabinets172.173 178.179 Single door fridges and freezers186.182 172.173 Fridge freezers - noFrostFriestanding Wine cabinet212.213 22.213 Mult-door / American Style fridge freezer 22.4225Dishwashers22.6227 22.6227 Technical diagrams24.225 22.6227 22.223 22.223 22.223 22.223 23.02459Dishwashers24.224 24.525Dishwashers24.224 24.525Dishwashers24.6247 24.527 7 7 7 7 7 7 7Supple door fridges24.224 24.225Dishwashers24.6247 24.227 24.225Dishwashers24.6247 24.227 24.225Dishwashers24.6247 24.227 24.225Dishwashers24.6247 24.227 24.225Dishwashers24.6247 <td></td> <td></td>		
Accessories51Coffee centre and coffee machines52-57Technical diagrams58-65Hobs66-119induction Air Plus hobs88-89Induction hobs97-99quickLite ceramic hobs102-103Gas hobs106-109Domino hobs110-111Technical diagrams112-118Hoods120-153Worktop ventilation134-135inductionAir Plus hobs138-139Decorative hoods138-139Box chimney hoods140-141Integrated design hoods144-143Telescopic hood144Integrated hood145Cooling154-229Bult-in172-173Wine cabinets172-173Fridge freezers – noFrost174-177Fridge freezers – noFrost174-177Single door fridges and freezers186-192Prestanding142-213Wine cabinet212-213Mult-door / American Style fridge freezer214-214-217Fridge freezers226-227Technical diagrams228-229Dishwashers226-227Technical diagrams228-229Dishwashers246-247Freestanding260-291Built-in260-291Built-in260-291Built-in260-291Gorn fully integrated dishwashers266-227Technical diagrams258-259Laundry appliances266Vasher dyers267Technical diagrams266-227		
Coffee centre and coffee machines52-57 Technical diagrams52-57 58-65Hobs66-119induction hobs94-96Induction hobs97-99quickLite ceramic hobs102-103 Gas hobsDomino hobs106-109Domino hobs110-111Technical diagrams112-118Hoods120-153Worktop ventilation134-135 	5	
Technical diagrams         58-65           Hobs         66-119           induction Air Plus hobs         94-96           Induction hobs         97-99           quickLite ceramic hobs         102-103           Gas hobs         102-103           Gas hobs         102-103           Domino hobs         110-111           Technical diagrams         112-118           Hoods         120-153           Worktop ventilation         134-135           inductionAir Plus hobs         136-137           Decorative hoods         138-139           Box chimney hoods         140-141           Integrated design hoods         142-143           Telescopic hood         144           Integrated hood         145           Canopy hoods         174-173           Fridge freezers - noFrost         172-173           Fridge freezers - noFrost         174-177           Fridge freezers - noFrost         174-273           Fridge freezers - noFrost		
Hobs66-119inductionAir Plus hobs88.89flexInduction hobs94.96Induction hobs97.99quickLite ceramic hobs102-103Gas hobs106-109Domino hobs110-111Technical diagrams112-118Hoods120-153Worktop ventilation134-135inductionAir Plus hobs136-137Decorative hoods138-139Box chimney hoods140-141Integrated design hoods148-153Cooling154-229Builtin172-173Wine cabinets172-173Fridge freezers - noFrost174-177Fridge freezers - lowFrost178-179Single door fridges and freezers180-185Technical diagrams186-192Freestanding110-117Wine cabinet212-213Multi-door / American Style fridge freezer214-217Fridge freezers220-223Upright single door fridges224-225Upright single door fridges224-225Upright single door fridges242-24445cm slimline dishwashers245-227Fectanding258-259Laundry appliances266Washing machines266Washing machines286-287Washing machines286-287Washer dryers287282-295200-291Services292-295Contact us292-293		
induction Air Plus hobs         88-89           flexInduction hobs         97-99           quickLite ceramic hobs         102-103           Gas hobs         106-109           Domino hobs         110-111           Technical diagrams         112-118           Hoods         120-153           Worktop ventilation         134-135           inductionAir Plus hobs         136-137           Decorative hoods         138-139           Box chimney hoods         140-141           Integrated design hoods         142-143           Telescopic hood         144           Integrated design hoods         144-147           Technical diagrams         146-147           Technical diagrams         172-173           Fridge freezers - noFrost         174-177           Fridge freezers         120-223           Upright single door fridges         224-224	-	
flexinduction hobs         94-96           Induction hobs         97-99           quickLite ceramic hobs         102-103           Gas hobs         106-109           Domino hobs         110-111           Technical diagrams         112-118           Hoods         120-153           Worktop ventilation         134-135           inductionAir Plus hobs         136-137           Decorative hoods         138-139           Box chimney hoods         144-141           Integrated design hoods         144-147           Telescopic hood         144           Integrated design hoods         144-147           Technical diagrams         146-147           Technical diagrams         172-173           Fridge freezers - noFrost         172-173           Fridge freezers - noFrost         174-177           Fridge freezers - noFrost         174-177           Fridge freezers - noFrost         174-177           Fridge freezers - noFrost         174-173           Fridge freezers - noFrost         174-177           Fridge freezers - noFrost         174-177           Fridge freezers         120-223           Upright single door fridges of greezer         214-217 <tr< td=""><td></td><td></td></tr<>		
Induction hobs97-99quickLite ceramic hobs102-103Gas hobs106-109Domino hobs110-111Technical diagrams112-118Hoods120-153Worktop ventilation134-135inductionAir Plus hobs136-137Decorative hoods138-139Box chimney hoods140-141Integrated design hoods142-143Telescopic hood144Integrated hood145Cooling154-229Built-in172-173Wine cabinets172-173Fridge freezers - noFrost174-177Fridge freezers - noFrost174-177Fridge freezers - noFrost174-177Fridge freezers - noFrost174-177Fridge freezers - lowFrost186-182Technical diagrams186-192Freestanding200-213Wulti-door / American Style fridge freezer212-213Multi-door / American Style fridge freezer218-219Fridge freezers220-223Upright single door freezers226-227Technical diagrams246-247Freestanding260-291Built-in260-291Gorm fully integrated dishwashers242-24445cm slimline dishwashers266-291Eunical diagrams268-269Laundry appliances266Washing machine266Washer dryers288-289Tumble dryers288-289Tumble dryers288-289Tumble dryers280-295		
Gas hobs         106-109           Domino hobs         110-111           Technical diagrams         112-118           Hoods         120-153           Worktop ventilation         134-135           inductionAir Plus hobs         136-137           Decorative hoods         138-139           Box chinney hoods         142-143           Telescopic hood         144           Integrated design hoods         142-143           Telescopic hood         144           Canopy hoods         146-147           Technical diagrams         148-153           Cooling         154-229           Built-in         172-173           Wine cabinets         172-173           Fridge freezers - noFrost         174-177           Fridge freezers - noFrost         174-177           Fridge freezers - NoFrost         178-179           Single door fridges and freezers         186-192           Freestanding         212-213           Multi-door / American Style fridge freezer         214-217           Traditional American Style fridge freezer         218-219           Fridge freezers         220-223           Upright single door freezers         226-227           Technical	Induction hobs	
Domino hobs         110-111           Technical diagrams         112-118           Hoods         120-153           Worktop ventilation         134-135           inductionAir Plus hobs         136-137           Decorative hoods         138-139           Box chimney hoods         140-141           Integrated design hoods         142-143           Telescopic hood         144           Canopy hoods         146-147           Technical diagrams         148-153           Cooling         154-229           Built-in         Technical diagrams           Wine cabinets         172-173           Fridge freezers – noFrost         174-177           Fridge freezers – noFrost         178-179           Single door fridges and freezers         180-185           Technical diagrams         186-182           Freestanding         110-111           Wine cabinet         212-213           Multi-door / American Style fridge freezer         214-217           Traditional American Style fridge freezer         214-217           Traditional American Style fridge freezer         218-219           Dishwashers         224-225           Upright single door fridges         224-224 <td>quickLite ceramic hobs</td> <td>102-103</td>	quickLite ceramic hobs	102-103
Technical diagrams         112-118           Hoods         120-153           Worktop ventilation         134-135           inductionAir Plus hobs         136-137           Decorative hoods         138-139           Box chinney hoods         142-143           Telescopic hood         144           Integrated design hoods         142-143           Telescopic hood         144           Integrated hood         145           Canopy hoods         146-147           Technical diagrams         148-153           Cooling         154-229           Built-in         172-173           Fridge freezers - noFrost         174-177           Fridge freezers - noFrost         174-177           Fridge freezers - noFrost         178-179           Single door fridges and freezers         180-185           Technical diagrams         186-192           Freestanding         112-213           Wulti-door / American Style fridge freezer         214-217           Traditional American Style fridge freezer         214-213           Multi-door / American Style fridge freezer         212-213           Multi-door / American Style fridge freezer         212-213           Upright single door fridges		
Hoods120-153Worktop ventilation134-135inductionAir Plus hobs136-137Decorative hoods138-139Box chinney hoods140-141Integrated design hoods142-143Telescopic hood144Integrated hood145Canopy hoods146-147Technical diagrams148-153Cooling154-229Built-in172-173Wine cabinets172-173Fridge freezers - noFrost174-177Fridge freezers - noFrost174-177Fridge freezers - noFrost174-177Fridge freezers - noFrost174-177Fridge freezers - noFrost178-179Single door fridges and freezers180-185Technical diagrams186-192Freestanding120-223Wine cabinet212-213Multi-door / American Style fridge freezer214-217Fridge freezers220-223Upright single door fridges224-225Upright single door fridges224-225Upright single door fridges242-24445cm stilmine dishwashers245-247Freestanding260-291Built-in260-29160cm dishwashers267Echnical diagrams268-269Laundry appliances266Washing machine266Washing machines288-289Washing machines288-287Washing machines288-287Washer dryers288-289Tumble dryers288-287Washer dryer		
Worktop ventilation         134-135           inductionAir Plus hobs         136-137           Decorative hoods         138-139           Box chimney hoods         140-141           Integrated design hoods         142-143           Telescopic hood         144           Integrated hood         145           Canopy hoods         146-147           Technical diagrams         154-229           Built-in            Wine cabinets         172-173           Fridge freezers - noFrost         174-177           Fridge freezers - noFrost         178-179           Single door fridges and freezers         180-185           Technical diagrams         186-192           Freestanding         212-213           Wuhe cabinet         212-213           Multi-door / American Style fridge freezer         218-219           Fridge freezers         220-223           Upright single door fridges         224-225           Upright single door fridges         224-225           Upright single door freezers         230-259           Built-in         60cm fully integrated dishwashers         242-244           45cm slimline dishwashers         246-247           Freestanding	5	
inductionAir Plus hobs         136-137           Decorative hoods         138-139           Box chimney hoods         140-141           Integrated design hoods         142-143           Telescopic hood         144           Integrated hood         145           Canopy hoods         146-147           Telescopic hood         144           Integrated hood         145           Canopy hoods         146-147           Technical diagrams         148-153           Cooling         154-229           Built-in         Technical diagrams           Wine cabinets         172-173           Fridge freezers – noFrost         174-177           Fridge freezers – lowFrost         178-179           Single door fridges and freezers         180-185           Technical diagrams         186-192           Freestanding         212-213           Multi-door / American Style fridge freezer         218-219           Fridge freezers         220-223           Upright single door fridges         224-225           Upright single door fridges         224-225           Upright single door fridges         224-224           Upright single door fridges         246-247	Hoods	120-153
Decorative hoods138-139Box chinney hoods140-141Integrated design hoods142-143Telescopic hood144Integrated hood145Canopy hoods146-147Technical diagrams148-153Cooling154-229Built-in172-173Wine cabinets172-173Fridge freezers - noFrost174-177Fridge freezers - lowFrost178-179Single door fridges and freezers186-192Freestanding142-213Wine cabinet212-213Mult-door / American Style fridge freezer214-217Traditional American Style fridge freezer214-217Traditional American Style fridge freezer224-225Upright single door freezers220-223Upright single door freezers226-227Technical diagrams242-24445cm slimline dishwasher245Technical diagrams246-247Freestanding260-291Built-in260-291Built-in260-291Built-in266Washing machine266Washing machines268-269Freestanding266Washing machines288-289Laundry appliances288-289Laundry appliances288-289Services290-291Services292-295Contact us292-295		
Box chimney hoods140-141Integrated design hoods142-143Telescopic hood144Integrated hood145Canopy hoods146-147Technical diagrams148-153Cooling154-229Built-inWine cabinets172-173Fridge freezers – noFrost174-177Fridge freezers – noFrost174-177Fridge freezers – noFrost174-177Fridge freezers – noFrost174-177Fridge freezers – noFrost178-179Single door fridges and freezers180-185Technical diagrams186-192Freestanding122-213Wine cabinet212-213Multi-door / American Style fridge freezer218-219Fridge freezers220-223Upright single door fridges224-225Upright single door freezers226-227Technical diagrams246-247Freestanding260-291Built-in260-291Gocm fully integrated dishwashers242-24445cm slimline dishwashers258-259Laundry appliances266-267Washing machine266Washing machines266-287Washing machines286-287Washing machines288-289Tumble dryers288-289Tumble dryers288-289Tumble dryers288-289Tumble dryers289-291Services292-295		
Integrated design hoods142-143Telescopic hood144Integrated hood145Canopy hoods146-147Technical diagrams148-153Cooling154-229Built-in172-173Wine cabinets172-173Fridge freezers – noFrost174-177Fridge freezers – lowFrost178-179Single door fridges and freezers180-185Technical diagrams186-192Freestanding122-213Wune cabinet212-213Mult-door / American Style fridge freezer214-217Traditional American Style fridge freezer214-217Traditional American Style fridge freezer224-225Upright single door fridges224-225Upright single door freezers226-227Technical diagrams228-229Dishwashers242-24445cm slimline dishwashers242-24445cm slimline dishwashers246-247Freestanding260-291Built-in260-291Gocm dishwashers268-269Laundry appliances266Washing machine266Washer dryers267Technical diagrams288-289Tumble dryers288-289Tumble dryers288-287Washing machines288-287Washing machines288-287Washing machines288-287Washing machines288-289Tumble dryers290-291Services292-295		
Telescopic hood       144         Integrated hood       145         Canopy hoods       146-147         Technical diagrams       148-153         Cooling       154-229         Built-in       172-173         Wine cabinets       174-177         Fridge freezers – noFrost       174-177         Freestanding       186-192         Wine cabinet       212-213         Multi-door / American Style fridge freezer       214-217         Traditional American Style fridge freezer       214-217         Fridge freezers       220-223         Upright single door fridges       224-225         Upright single door fridges       224-225         Upright single door freezers       226-227         Technical diagrams       242-244         45cm slimline dishwasher       245         Technical diagrams       242-244         45cm slimline dishwasher       245         Technical diagrams       266-287 <td>-</td> <td></td>	-	
Integrated hood145Canopy hoods146-147Technical diagrams148-153Cooling154-229Built-in1254-229Wine cabinets172-173Fridge freezers – noFrost174-177Fridge freezers – lowFrost178-179Single door fridges and freezers180-185Technical diagrams186-192Freestanding121-213Wine cabinet212-213Multi-door / American Style fridge freezer214-217Traditional American Style fridge freezer218-219Fridge freezers220-223Upright single door fridges224-225Upright single door freezers226-227Technical diagrams228-229Dishwashers240-259Built-in260-259Gocm fully integrated dishwashers246-247Freestanding260-291Built-in260-291Built-in260-291Washing machine266Washer dryers267Technical diagrams268-269Freestanding268Washing machines286-287Washing machines286-287 <td></td> <td></td>		
Canopy hoods146-147Technical diagrams148-153Cooling154-229Built-in172-173Wine cabinets172-173Fridge freezers – noFrost174-177Fridge freezers – lowFrost178-179Single door fridges and freezers180-185Technical diagrams186-192Freestanding212-213Multi-door / American Style fridge freezer218-219Fridge freezers220-223Upright single door fridges224-225Upright single door fridges224-225Upright single door freezers226-227Technical diagrams228-229Dishwashers230-259Built-in260-259Gocm fully integrated dishwashers246-247Freestanding260-291Built-in266Washing machine266Washer dryers267Technical diagrams268-269Freestanding268-269Freestanding268-269Freestanding268-269Freestanding268-269Freestanding268-269Freestanding268-269Freestanding268-287Washing machines286-287Washing machines286-287Washing machines286-287Washing machines286-287Washing machines286-287Washing machines286-287Washing machines286-287Washing machines286-287Washing machines286-287Washing	•	
Technical diagrams         148-153           Cooling         154-229           Built-in         172-173           Fridge freezers – noFrost         174-177           Fridge freezers – lowFrost         178-179           Single door fridges and freezers         186-192           Freestanding         186-192           Wine cabinet         212-213           Multi-door / American Style fridge freezer         214-217           Traditional American Style fridge freezer         218-219           Fridge freezers         220-223           Upright single door fridges         224-225           Upright single door freezers         226-227           Technical diagrams         228-229           Dishwashers         230-259           Built-in         60cm fully integrated dishwashers         242-244           45cm slimline dishwasher         245           Technical diagrams         258-259           Laundry appliances         266           Washing machine         266           Washing machines         266           Washing machines         286-287           Washing machines         286-287           Washer dryers         288-289           Tumble dryers         290	•	
Built-inWine cabinets172-173Fridge freezers – noFrost174-177Fridge freezers – lowFrost178-179Single door fridges and freezers180-185Technical diagrams186-192Freestanding212-213Multi-door / American Style fridge freezer214-217Traditional American Style fridge freezer218-219Pridge freezers220-223Upright single door fridges224-225Upright single door freezers226-227Technical diagrams228-229Dishwashers230-259Built-in60cm fully integrated dishwashers60cm fully integrated dishwashers246-247Freestanding260-291Built-in260-291Built-in260-291Built-in266Washing machine266Washing machine266Washing machine267Technical diagrams268-269Freestanding267Technical diagrams268-287Washing machines286-287Washing machines286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293		
Wine cabinets       172-173         Fridge freezers – noFrost       174-177         Fridge freezers – lowFrost       178-179         Single door fridges and freezers       180-185         Technical diagrams       186-192         Freestanding       212-213         Multi-door / American Style fridge freezer       214-217         Traditional American Style fridge freezer       218-219         Fridge freezers       220-223         Upright single door fridges       224-225         Upright single door freezers       226-227         Technical diagrams       228-229         Dishwashers       230-259         Built-in       60cm fully integrated dishwashers       242-244         45cm slimline dishwasher       245         Technical diagrams       258-259         Laundry appliances       260-291         Built-in       266         Washing machine       266         Washing machines       286-287         Washer dryers       288-289         Tumble dryers       288-289         Tumble dryers       290-291         Services       292-295	Cooling	154-229
Fridge freezers - noFrost174-177Fridge freezers - lowFrost178-179Single door fridges and freezers180-185Technical diagrams186-192Freestanding212-213Wine cabinet212-213Multi-door / American Style fridge freezer214-217Traditional American Style fridge freezer218-219Fridge freezers220-223Upright single door fridges224-225Upright single door freezers226-227Technical diagrams228-229Dishwashers230-259Built-in60cm fully integrated dishwashers60cm fully integrated dishwashers242-24445cm slimline dishwashers246-247Freestanding260-291Built-in266%ocm dishwashers268-259Laundry appliances268267268-269Freestanding268Washing machine268Washing machines286-287Washer dryers288-289Tumble dryers288-289Tumble dryers290-291Services292-295Contact us292-293		
Fridge freezers – lowFrost178-179Single door fridges and freezers180-185Technical diagrams186-192Freestanding212-213Wuhe cabinet212-213Multi-door / American Style fridge freezer214-217Traditional American Style fridge freezer218-219Fridge freezers220-223Upright single door fridges224-225Upright single door freezers226-227Technical diagrams228-229Dishwashers230-259Built-in60cm fully integrated dishwashers60cm fully integrated dishwashers246-247Freestanding258-259Laundry appliances260-291Built-in266Washing machine268Washing machines268-269Freestanding268-287Washing machines286-287Washing machines286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293		
Single door fridges and freezers180-185Technical diagrams186-192Freestanding212-213Wine cabinet212-213Multi-door / American Style fridge freezer214-217Traditional American Style fridge freezer218-219Fridge freezers220-223Upright single door fridges224-225Upright single door freezers226-227Technical diagrams228-229Dishwashers230-259Built-in230-25960cm fully integrated dishwashers242-24445cm slimline dishwasher245Technical diagrams246-247Freestanding 60cm dishwashers258-259Laundry appliances260-291Built-in Washing machine266Washer dryers267Technical diagrams268-269Freestanding Washing machines286-287Washing machines286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293	5	
Technical diagrams186-192Freestanding212-213Wine cabinet212-213Multi-door / American Style fridge freezer214-217Traditional American Style fridge freezer218-219Fridge freezers220-223Upright single door fridges224-225Upright single door freezers226-227Technical diagrams228-229Dishwashers230-259Built-in230-25960cm fully integrated dishwashers242-24445cm slimline dishwasher245Technical diagrams246-247Freestanding 60cm dishwashers258-259Laundry appliances260-291Built-in Washing machine266Washer dryers267Technical diagrams268-269Freestanding Washing machines286-287Washer dryers286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293	5	
FreestandingWine cabinet212-213Multi-door / American Style fridge freezer214-217Traditional American Style fridge freezer218-219Fridge freezers220-223Upright single door fridges224-225Upright single door freezers226-227Technical diagrams228-229Dishwashers230-259Built-in230-25960cm fully integrated dishwashers242-24445cm slimline dishwasher245Technical diagrams258-259Laundry appliances260-291Built-in260-291Built-in266Washing machine266Washer dryers267Technical diagrams268-289Laundry appliances286-287Washing machines286-287Washing machines286-287Washing machines286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293		
Wine cabinet212-213Multi-door / American Style fridge freezer214-217Traditional American Style fridge freezer218-219Fridge freezers220-223Upright single door fridges224-225Upright single door freezers226-227Technical diagrams228-229Dishwashers230-259Built-in24560cm fully integrated dishwashers242-24445cm slimline dishwasher245Technical diagrams258-259Laundry appliances260-291Built-in266Washing machine267Technical diagrams268-269Freestanding267Washing machine268Washing machines286-287Washing machines286-287Washer dryers286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293		
Multi-door / American Style fridge freezer214-217Traditional American Style fridge freezer218-219Fridge freezers220-223Upright single door fridges224-225Upright single door freezers226-227Technical diagrams228-229Dishwashers230-259Built-in230-25960cm fully integrated dishwashers242-24445cm slimline dishwasher245Technical diagrams246-247Freestanding260-291Built-in260-291Built-in260-291Built-in266Washing machine266Washing machine267Technical diagrams268-269Freestanding267Technical diagrams268-269Freestanding268-269Freestanding268-269Freestanding268-269Freestanding286-287Washing machines286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-295	5	212-213
Traditional American Style fridge freezer218-219Fridge freezers220-223Upright single door fridges224-225Upright single door freezers226-227Technical diagrams228-229Dishwashers230-259Built-in60cm fully integrated dishwashers60cm fully integrated dishwashers242-24445cm slimline dishwasher245Technical diagrams246-247Freestanding258-259Laundry appliances260-291Built-in266Washing machine267Technical diagrams268-269Freestanding268-269Washing machine268Washing machines286-287Washer dryers286-287Washer dryers286-287Washer dryers286-287Washer dryers280-291Services292-295Contact us292-293	Multi-door / American Style fridge freezer	
Fridge freezers220-223Upright single door fridges224-225Upright single door freezers226-227Technical diagrams228-229Dishwashers230-259Built-in60cm fully integrated dishwashers60cm fully integrated dishwashers242-24445cm slimline dishwasher245Technical diagrams246-247Freestanding258-259Laundry appliances260-291Built-in266Washing machine266Washer dryers267Technical diagrams268-269Freestanding268-269Freestanding268-287Washing machines286-287Washer dryers286-287Washer dryers286-287Washer dryers286-287Washer dryers280-291Services292-295Contact us292-293		218-219
Upright single door freezers226-227Technical diagrams228-229Dishwashers230-259Built-in242-24460cm fully integrated dishwashers242-24445cm slimline dishwasher245Technical diagrams246-247Freestanding258-259Laundry appliances260-291Built-in266Washing machine266Washer dryers267Technical diagrams268-269Freestanding268-269Freestanding268-269Freestanding268-269Freestanding286-287Washing machines286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293	Fridge freezers	220-223
Technical diagrams228-229Dishwashers230-259Built-in242-24460cm fully integrated dishwashers242-24445cm slimline dishwasher245Technical diagrams246-247Freestanding258-259Laundry appliances260-291Built-in266Washing machine266Washer dryers267Technical diagrams268-269Freestanding268-269Freestanding268-269Freestanding268-269Freestanding286-287Washing machines286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293		
Dishwashers230-259Built-in242-24460cm fully integrated dishwashers242-24445cm slimline dishwasher245Technical diagrams246-247Freestanding258-259Laundry appliances260-291Built-in266Washing machine266Washer dryers267Technical diagrams268-269Freestanding268-269Freestanding268-269Freestanding268-269Freestanding286-287Washing machines286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293		
Built-in60cm fully integrated dishwashers242-24445cm slimline dishwasher245Technical diagrams246-247Freestanding258-259Laundry appliances260-291Built-in266Washing machine266Washer dryers267Technical diagrams268-269Freestanding268-269Freestanding268-269Freestanding288-289Tumble dryers286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293	Technical diagrams	228-229
60cm fully integrated dishwashers242-24445cm slimline dishwasher245Technical diagrams246-247Freestanding258-259Laundry appliances260-291Built-in266Washing machine266Washer dryers267Technical diagrams268-269Freestanding286-287Washing machines286-287Washer dryers286-287Washer dryers286-287Washer dryers286-287Services292-295Contact us292-293	Dishwashers	230-259
45cm slimline dishwasher245Technical diagrams246-247Freestanding258-259Laundry appliances260-291Built-in266Washing machine266Washer dryers267Technical diagrams268-269Freestanding286-287Washing machines286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293	Built-in	
Technical diagrams246-247Freestanding 60cm dishwashers258-259Laundry appliances260-291Built-in Washing machine266Washer dryers267Technical diagrams268-269Freestanding Washing machines286-287Washer dryers286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293	60cm fully integrated dishwashers	242-244
Freestanding 60cm dishwashers258-259Laundry appliances260-291Built-in266Washing machine266Washer dryers267Technical diagrams268-269Freestanding286-287Washer dryers286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293		245
60cm dishwashers258-259Laundry appliances260-291Built-in266Washing machine266Washer dryers267Technical diagrams268-269Freestanding286-287Washer dryers286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293	-	246-247
Built-inWashing machine266Washer dryers267Technical diagrams268-269Freestanding286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293	5	258-259
Built-inWashing machine266Washer dryers267Technical diagrams268-269Freestanding286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293	Laundry appliances	260-291
Washer dryers267Technical diagrams268-269Freestanding286-287Washing machines286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293		
Technical diagrams268-269Freestanding286-287Washing machines286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293		266
FreestandingWashing machines286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293		
Washing machines286-287Washer dryers288-289Tumble dryers290-291Services292-295Contact us292-293	Technical diagrams	268-269
Washer dryers         288-289           Tumble dryers         290-291           Services         292-295           Contact us         292-293	•	
Tumble dryers         290-291           Services         292-295           Contact us         292-293		
Services         292-295           Contact us         292-293	-	
Contact us 292-293	-	
	Services	
Register your manufacturer's warranty294-295		
	Register your manufacturer's warranty	294-295

# Intelligently connected, a growing world of possibilities

### Take the next step into the future as Siemens and Home Connect redefine the everyday with future driven innovations.

It is easy to think that kitchens are fully evolved, at Siemens we apply technology intelligently to continuously adapt and even pre-empt changing demands. Our smart appliances go further, all packaged into cutting edge design. Innovative features like checking how many dishwasher tablets are left whilst shopping to help manage the household more effectively. And with the new detergent scan feature, reducing detergent wastage is made possible.

Our i-Dos washing machine can automatically determine the right amount of detergent to use based on the washing load and the water hardness in the area. When using with the detergent scan feature on the app it will further fine tune settings according to the detergent used.

Siemens smart Home Appliances with Home Connect offer even more possibilities - from the everyday to the not so everyday

#### Ovens

- Recipes: The Home Connect recipe section offers a large and delicious variety of Siemens approved recipes. The recipe cooking settings can even be sent directly to the oven, straight from a mobile, tablet or smart device when selected via the app.
- Remote Control: The oven can be operated intuitively from anywhere, for instance to preheat the oven on the way home
- Oven Assistant: By selecting from a broad range of dish options, the oven will be automatically set to the ideal temperature and cooking mode to get perfect results on the chosen dish

#### Coffee Machines

- coffeeWorld: A wide range of additional coffee specialties from around the world are available exclusively from the app. Drinks can be selected and ordered directly from the app and instructions sent straight to the coffee machine.
- coffeePlaylist: Guests can be easily entertained and impressed. A playlist can be built by asking each guest to submit their own coffee preferences via the app and the whole beverage list can then be transferred remotely to the coffee machine. The drinks will be prepared one after the other.
- Remote Control: It is easy to grab a coffee between meetings when working from home by operating the coffee machine remotely via the app, voice control or smart watch

#### Hobs and Hoods

- Notifications: Helpful push notifications can be set to inform when the appliance needs maintenance attention. such as when the filters need replacing.
- Cooking assistant: The assist tab on the Home Connect App can help find and select cooking methods on the hob. Settings can even be sent directly to the hob for easier and guicker evening meals.
- Hob-Hood Control: Siemens hobs and hoods with Home Connect work together intelligently. The hood will switch on and adjust its settings automatically as needed when the hob is switched on

#### Fridge Freezers

- Remote Control: The temperature and settings can be managed remotely using the Home Connect app. With helpful push notifications directly to the app, such as when the door is left open, it is easy to stay in control.
- Inventory: It is easy to keep track of what is in the fridge using the Inventory within the app. And for when food is nearing its use-by date, the No Waste recipes are perfect for using up ingredients in time.

#### Dishwashers

- Remote Control: The dishwasher can be operated from anywhere to fit in with all lifestyles. Check the washing status, receive push notifications such as when the programme is finished or when the rinse aid needs topping up and even start the machine remotely when out of the home
- Programme Assistant: Simply select the type of dishes and cleaning preference on the app and Home Connect will suggest the best cycle for the load, to make dishwashing stress free and straight forward.

#### Washing Machines and Tumble Dryers

- intelligentDry: Load details can be automatically sent from the washing machine to the dryer to help it select the optimum drying programme. Once the drying programme has finished, it will ask for a rating to help inform the settings of future cycles.
- easyStart: For help with choosing the right programme, individualised to the load. By answering a few simple questions about the load, it will recommend and set up the right program. Then all that is needed is to tap start.



### Our world has turned into an ever-growing network of partner services, to help turn any house into a fully connected home.

#### Reduce the effort of household tasks with Amazon Alexa and Google Assistant.

With the Home Connect skills, voice control can be used for easy interaction with connected appliances at home. From simple dialogues to personalised interactions, managing the household is made even easier. With just a few simple commands, it is possible to start the laundry programme, preheat the oven, check the dishwasher progress or ask for a coffee to be made. A world of exciting possibilities await when using voice assistant with Home Connect appliances.

#### Make life easier with Smart Reorder via the Alexa app.

Avoid running out of dishwasher tablets as Smart Reorder via the Amazon Alexa app brings automatic replenishment. The easy to set up feature will keep count of the remaining tabs and send a reminder when they need to be reordered.

#### Manage appliances while on a run with Fitbit.

Fitbit and Home Connect can help make sure a warm meal or cup of coffee is waiting at home after every training session. Thanks to the remote control capabilities of the app, the oven, coffee machine, washing machine, washer dryer, tumble dryer and dishwasher can be controlled directly from a Fitbit smartwatch. The status of appliances can also be monitored in real time, making it easier to remain in control



#### Try demo

For a better understanding of the features available on the Home Connect app. You can still download the app and use the demo function without registering appliances.

To experience the demo mode use the QR codes to download the free Home Connect app, tap 'add appliances' on the home screen and choose from a range of demo appliances to experiment with.






# Protecting peace of mind

With Quiet Mark accredited products that will not disturb the peace and quiet of the home.

Technology has made homes more efficient and convenient than ever before, but it has also made them noisier. Our daily lives are accompanied by the sounds of TVs, traffic, ringing phones, and working appliances. Quiet Mark was conceived as a global hub where consumers, trade buyers and architects can go to find verified thirdparty-checked quiet machines, equipment and technology. They have acoustic teams and a UK headquarters with labs where they test some products, and work with specialist labs worldwide to test others. Their testing covers a wide range of products, including not just home appliances but also forklift trucks, computer mice, and noisecancelling headphones. Their goal is to make it standard for every dishwasher, for example, to operate under a certain decibel level and offer sound quality that is carefully considered during the research and design stage.



#### What effect does noise have on a person's wellbeing?

The impact of noise is more significant than people may initially think. Sound triggers the release of cortisol and adrenaline in the body, enabling quick action to protect ourselves against potential danger. This was necessary for survival in huntergatherer days. Fast forward to today, where people are surrounded by layers upon layers of noise which cause our bodies to release cortisol, creating adrenaline and putting additional pressure on the heart. Over time, this stress can cause headaches, difficulty concentrating or sleeping, and changes to the mood. Despite these potentially extreme reactions, the impact of sound is often ignored and misunderstood because it is invisible. This makes it even more of a threat to people's well-being.

#### How do noisy appliances affect the home It is not just one noise but often multiple appliances running at once. This is likely to create a variety of beeps, bleeps, and sudden noises, and these can all add up. This can be particularly problematic if the office is also the kitchen table, or if someone in the household has hearing sensitivities or autism. By reducing the overall number of decibels in the home, people can also reduce anxiety levels and create a more peaceful space for everyone.

#### Which appliances are the biggest culprits when it comes to noise?

In late 2021 and early 2022, Quiet Mark conducted surveys to determine how people in the UK and the US feel about noise in the post-pandemic world. Their findings indicate that over four fifths of Brits, regardless of age group or region, would prefer to have quieter home appliances. The surveys also revealed that larger appliances, such as washing machines and dishwashers, were the biggest culprits of noise. Vacuum cleaners and juicers were also noted as sources of noise.

#### Is noise a consideration when people are buying appliances?

Their research also shows that over two thirds of UK consumers are more likely to purchase an appliance labelled as "quiet" compared to a similar product with no reference to noise levels. Furthermore, people are generally willing to pay more for quieter appliances. This trend is reflected in customer reviews, where many products receive high ratings specifically because they are quiet.





ow does Quiet Mark accreditation work?

their list of approved appliances, the team at Quiet Mark searches through all the s of large appliances worldwide and creates databases of their energy labels. By law, every brand must undertake sound testing to certain ISO standards and declare this level For washing machines, for example, this pertains to the levels for the spin and wash cycles. Although it is not possible for them to test every appliance, they do conduct spot checks. They then determine the very quietest 10 to 20% in each appliance category. A brand cannot buy a Quiet Mark; it is only awarded if its appliances meet these criteria. Siemens began its partnership with Quiet Mark in January 2023, and currently offers over 60 large appliances with Quiet Mark status. Look out for the Quiet Mark logo by the appliances to find them.

# The perfect line up. Coordinated and intuitive cooking experiences

From ovens, to warming drawers, to coffee centres. Siemens clean lines and matching intelligent appliances allow for perfect design coordination.

#### Ovens

Siemens built-in ovens impress with their sleek finish and premium materials. They can be fitted alone or coordinated with other Siemens appliances for a design statement. Their ability to be installed independently allows full flexibility to fit appliances under work surfaces, in tall units or in a bank with other appliances. These multiple combinations give full freedom with the kitchen design, not to mention state-of-the art technology and intelligent features which save time when cooking.

#### Compacts

With the variety of appliances in our compact built-in range, Siemens provides a combination of options to suit preferences, while delivering complete visual perfection. Siemens 45cm and 38cm high compact appliances allow for a full array of cooking configurations. Depending on the range and model, compact ovens are available with steam or integrated microwave, offering space-saving design without compromising on style or utility.



#### Siemens cooking warranties:



2 year warranty

A two year warranty is available on all Siemens ovens and compact appliances listed in this brochure to protect against manufacturing and material faults during this warranty period.

> To find out more about warranty and for registration, please visit: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties




### Key features within the iQ700 and iQ500 range



fast preheat No more tedious waiting for the oven to reach the right temperature.

The fast preheating feature activates multiple heating elements simultaneously to get to the desired temperature very quickly.



Cooking certain frozen and chilled foods in the oven is now even faster – thanks to the innovative coolStart function. Without the need to wait for the oven to reach the set temperature, frozen and chilled foods can be successfully cooked without preheating, while still using the recommended cooking time.



#### Everything put in a good light.

Depending on the model, there are different kinds of illumination inside the oven. Whether it is the standard Halogen light, LEDs or the most advanced Multilevel LED strip, they all provide a brilliant view into the oven without having to open the door.







Introduction to iQ700 and iQ500 cooking | Cooking

Models shown: HM778GMB1B single oven, CT718L1B0 coffee machine, CM778GNB1B compact oven, BI710D1B1B warming drawer.



#### Electronic control

Depending on the function selected, the oven will suggest a suitable temperature which can be manually adjusted. The selected temperature is displayed digitally and a heating up indicator shows the progress towards the set temperature. The same indicator shows residual heat once the oven is turned off. Get quick access to performance features like cookControl Plus and cookControl Pro whilst being safe in the knowledge that if left unadjusted for a period of time, the oven will switch off automatically.



# Get more with Home Connect

10:09

Coffee Machine

Espresso Macchiato

Running

SIEMENS

.....

Partners brought to you by Home Connect

O amazon alexa

O Home Connect

### Our range of smart cooking appliances with Home Connect are designed to work intelligently for the user.

#### In safe hands.

SIEMENS

Siemens cooking appliances are equipped with intelligent sensors to help get the best results when cooking. For example, the 'dishes' section on the app will suggest the best cooking settings for a chosen dish.

The vast choice of recipes in the recipe section of the Home Connect app provide inspiration for budding or experienced home cooks alike. Once selected the cooking settings of the recipe can be transferred automatically to the oven intuitively from the app.

A growing world of partners. The constantly growing network of partner solutions opens up completely new perspectives and networking possibilities. For an everyday life that is efficient and exciting like never before.

The Siemens Wi-Fi-enabled ovens connect to a wide range of smart devices and services. With partners including voice assistants, recipes, energy management and shopping and reordering - connecting appliances to Home Connect brings a whole world of opportunities to Siemens appliances.

Intelligent thinking, intelligent design. We enable multiple ways to control our appliances to help when hands are full or life becomes busy - voice, smartwatch, tablet, and smartphone. There are countless applications that can be precisely tailored to the user's needs. With Home Connect and the relevant partner, the whole household can now be controlled with just one click. Everyone can create their own personal scenarios; for example by automating the switching off of various devices as they leave the home. An all-in-one solution for intelligent home automation.

Said. Done.

Joined up thinking. hand with the Home Connect app.

Enduring performance. edge of technology.

Knowledge at the touch of a button. No need to search for the manuals hidden in the kitchen drawer, they can be accessed anytime easily with a simple tap via the Home Connect app.

Download and install Home Connect App

🚺 Home Connect 📗



From easy set-up, quick access to user manuals, scheduling pyrolytic cleaning start times to fit consumers' needs, to notifications to clean cooker hood filters; Siemens cooking appliances with Home Connect intelligently make everything easy and more accessible.

Appliances can be controlled without lifting a finger, by simply asking Amazon Alexa or the Google Assistant to start the oven, or even how long it will take until dinner is ready? The oven can even be controlled easily by voice while relaxing on the sofa.

Depending on the model our smart ovens with roastingSensor know when the dish is done perfectly and switches itself off to avoid wasting energy unnecessarily. Complete control is at

Downloadable programmes and software updates ensure the oven is always at the cutting

# Uncompromising design and technology: iQ700

Introducing features unique to the Siemens iQ700 ovens and compact appliances range.

#### Display options available for iQ700 single ovens and compact ovens

The iQ700 range oven menu comes with a high resolution TFT Touchdisplay in three different sizes. Each display type is designed to complement each other and coordinate effortlessly. The high-contrast colour screen offers smooth and intuitive navigation and gives access to all features by a simple touch. It is even easier to select the perfect settings with 'favourites' which can be accessed directly from the main menu.







#### TFT Touchdisplay Pro

Our largest high-contrast colour display is easy to read from any angle, allowing easy and comfortable operation of the oven.

#### TFT Touchdisplay Plus

A smaller display but still with the same colour, high-contrast display, the TFT Touchdisplay Plus is the intuitive and satisfying control centre of the oven.

#### TFT Touchdisplay

Our smallest display in the range but no less equipped to make the cooking experience effortless and help get the most from the oven.

# Thanks to activeClean®, ecoClean®, ecoClean® Plus and humidClean by Siemens, cleaning the oven becomes simple and effortless.



Ovens with activeClean<sup>®</sup> Baked on food and grease can be removed

at the push of a button without any need for chemical treatments. Hassle-free, the oven cleans itself thoroughly with activeClean<sup>®</sup>. It does so by heating up to a very high temperature – turning all residues into ash, which can easily be wiped away. This process is called pyrolysis and is an extremely convenient and efficient way to clean the whole interior of the oven saving time and effort.

For iQ700, the optional telescopic rails and full width enameled pan are specially designed to be used with activeClean® so they do not need to be removed during the cleaning process. Only the wire shelf needs to be removed.







### Ovens with ecoClean<sup>®</sup> and ecoClean<sup>®</sup> Plus

A special coating applied directly to the inside of the oven (please check specification of individual models), ecoClean® and ecoClean® Plus make cleaning the oven easy. The coated area cleans itself while the oven is on and models with back, roof and side coating benefit from a special cleaning programme.



#### humidClean

For faster cleaning, dirt is softened beforehand by vaporising soapy water. Simply add a drop of detergent to 400ml of water, pour the solution onto the centre of a completely cooled cooking compartment and set the cleaning programme. Once done the soiling can easily be removed with a dish cloth or soft brush.



#### Cleaning and de-scaling

Finished with a durable enameled interior, most Siemens compact45 combination ovens with steam feature dedicated cleaning and de-scaling programmes.



#### Drying programme

This programme can be used after each use to dry residual moisture inside the cavity of the oven.

#### iQ700 ovens and compacts are designed to complement one another.

#### An option for every need.

The Siemens oven range offers a wide selection of options to choose from which can be combined in a bank or in a row. From single ovens with an easy clean solution such as activeClean, to an oven with steam function. They can be combined with an additional compact model such as coffee machine or oven with integral microwave.

#### Cooking with steam.

The Siemens compact steamer and steam combination ovens provide the benefit of steam together with perfect design coordination. Steam and added steam cooking has increased in popularity in the past few years. Not only does this offer healthier cooking options as steam retains vitamins and nutrients, but also maintains the visual appearance of many foods. With fullSteam Plus, healthy can also be convenient. Using the perfectly balanced combination of steam and heat at 120°C, dishes finish cooking up to 50% faster than using the standard 100°C steam function.

#### The coffee solution.

For coffee connoisseurs, adding a Siemens coffee centre to the design can be a great solution. This versatile machine will provide a variety of specialist coffees at the touch of a button.

#### Keep it warm.

The Siemens iQ700 range also includes warming drawers. Primarily designed to pre-heat crockery and keep cooked food warm, these drawers can also slow cook, prove dough and defrost.

Available in 14cm or 29cm high options, they combine perfectly with single ovens and 45cm compact models in column or side by side in bank installations. For optimum design coordination, choose iQ700 models with matching TFT displays.







#### A built-in kitchen assistant.

#### cookControl Pro

Pre-installed, automated baking and roasting programmes in the oven guarantee ideal preparation. The chosen dish can be simply selected via the clearly arranged TFT Touchdisplay and the oven's sensors then control the process. The preferred result can be selected from various suggestions depending on time or preferences. The oven automatically applies the correct settings and functions then turns off when the dish is ready. More programmes can be downloaded by connecting the oven with a registered Home Connect account.

In addition to pre-installed programmes, cookControl Pro gives access to additional special sensors or heating modes depending on the appliance.

#### The same great results in up to half the time.



auto

cookControl Pro

#### varioSpeed

When time is of the essence use the varioSpeed function to cut down cooking time by up to 50%.

Intuitive to use and a real "allrounder" - add the microwave function to the chosen heating mode to enjoy delicious and refined dishes faster.

varioSpeed delivers outstanding results such as soft textures and crispy crusts all in record time.



#### Achieve the best results.



Easier than ever before: roastingSensor Plus Thanks to three measuring points, the innovative roasting thermometer is able to precisely and reliably measure the core temperature of a wide range of foods. Ideal for meat, poultry and fish, it can even be combined with the integrated microwave and the pulseSteam function. The roastingSensor Plus removes the need to keep checking on food.



bakingSensor Plus

the baking process is complete. Select the required dish and the innovative sensor technology fitted inside selected iQ700 ovens can automatically control the baking process for consistently delicious results. The bakingSensor constantly measures the humidity levels in the oven interior and is therefore able to determine when the dish is fully cooked and ready.

#### Smooth operator.

softMove



For effortless operation of the oven door, the dampers ensure gentle and quiet opening every time. Available on all iQ700 built-in ovens.



18

#### Features specific to iQ700 | Cooking


Thanks to bakingSensor Plus the oven can detect when













#### fullSteam Plus

The steam function of the new iQ700 oven is not only a healthier way of cooking, it is also faster. The perfectly balanced combination of steam and heat at 120°C finishes dishes up to 50% faster than using the standard 100°C steam function. Ideal to preserve vegetables' fresh colours and retain vitamins and minerals. Even firm vegetables like potatoes and carrots become perfectly tender, making fullSteam Plus one of the most convenient ways to prepare a delicious and healthy meal.



#### pulseSteam

Siemens ovens and compact appliances with pulseSteam are real all-rounders for more flexibility when cooking. Steam can easily be added while baking and roasting with hot air. Multi function options offer the perfect cooking method for any food, preserving everything that is important: flavour, smell, texture and nutrients. Siemens combi-steam ovens do not just work with hot air but also with top and bottom heating and grilling, so bread, cakes and roasts come out just right: crisp on the outside and moist on the inside.

#### How does it work?

Siemens steam and steam combination ovens are quick and easy to install as they do not require plumbing-in. Our fullSteam ovens have the temperature range indicated; whereas our pulseSteam models have three intensity levels which can be adjusted, depending on what is being cooked.

The removable 1 litre water tank (1.3 litre for compact steamer) is accessed behind the semi-automatic control panel making it more convenient and easier to refill, even during cooking. Water is heated by a fast and efficient steam generator before being introduced into the oven. Thermostatic controls allow a pure steam temperature of  $30 - 100^{\circ}$ C.



Model shown: HS758G3B1B single oven

#### Rail Systems: The perfect accessories, designed especially for the iQ700 oven.

We supply accessories that help make cooking easier and more enjoyable. Great for tailoring the oven to individual needs offering ease of use and flexible cooking options to help create the perfect dish.



#### iQ700 telescopic rails

Fully extendable telescopic rails are available as an optional extra on selected iQ700 ovens. Designed to glide smoothly and effortlessly out of the oven, these rails offer clear and comfortable access to food during cooking and to remove the food once cooked without having to reach into the hot oven. Versions suited to pyrolytic models which can remain in the appliance during the cleaning cycle are also available, for effortless cleaning of the oven and the rails at the same time.

<sup>1</sup> Telescopic rails are not available as optional accessories on ovens with integral microwave



#### Cooking flexibility.



#### 4D hotAir

The innovative technology of the fan motor enables optimum heat distribution around the interior of the oven, as the oven is programmed to change the rotating direction of the fan every few minutes. Due to even distribution of heat within the cavity, cooking on up to 4 shelf levels is possible (for compact appliances up to 3 shelves). Food therefore always turns out perfectly, no matter which shelf it is placed on.







# Innovative speed solutions

### for outstanding cooking creations: iQ500

Featuring more traditional, yet stylish, illuminated and easy to use Alternatively, the innovative CP565AGS0B features not only control dials, the coordinated lightControl design allows the single microwave and oven functionality, but also full steam and steam ovens, built-in/under double ovens, compact microwave combination combination options - the ultimate solution for combination cooking ovens, built-in microwave ovens, and warming drawers to be and perfect for maximising options if space is a premium. installed together, both vertically and horizontally\*.

Siemens offers a choice of two coordinating iQ500 45cm compact microwave combination ovens, each featuring the same striking blue and white lightControl display as the iQ500 single ovens.

The standard microwave combination oven CM585AGS0B features a large 36cm ceramic base to allow for use of rectangular dishes compared to a turntable.

#### Operation meets fascination.



The lightControl dial highlights the chosen heating symbol with a striking blue light – making operating the oven into an intuitive and exciting experience. The design is consistent throughout the iQ500 range with the intuitive illuminated lightControl dials, whether selecting a cooking function on a single oven, or introducing steam to the 3 in 1 microwave combination compact appliance.



#### Guarantee the best cooking results.



Providing automatic programmes for mainly meat, poultry and fish. Available with either 10 programmes or 30 programmes, simply select the desired dish and enter the food's weight everything else is done automatically.



perfectly done.

Compact combination ovens are complemented by a 14cm high warming drawer to ensure complete iQ500 design coordination.

The iQ500 range also offers two design coordinated solo microwaves - a 25L version for installation in tall housing and a smaller 20L model design to fit into 30cm deep wall cupboards.

\*Horizontal combinations for single ovens and 45cm compact appliances only.



#### The secret to perfection.



#### addedSteam

This feature benefits foods by adding moisture and enhancing colour and crispness. This is done by enhancing a natural process called the Maillard effect. This is a reaction which occurs when natural sugars are caramelised in the presence of heat that gives conventionally cooked food it's colour and crispness. Adding shots of steam intensifies this reaction. For example bread crusts become dark, shiny and crisper compared to being cooked using conventional heat only.

Single point roastingSensor The roasting thermometer is able to precisely and reliably measure the internal temperature of dishes. By getting an accurate reading of the core temperature of boneless and fat less dishes, it can determine when they are



#### 3D hotAir

With the 3D hotAir, the oven distributes the heat consistently inside the oven cavity to guarantee perfect baking results while preventing flavours and smells intermingling even when cooking on three levels simultaneously.



# Introducing Siemens iQ500 double ovens.

#### softClosing Door.

Adding to the ambience of any kitchen, the softClosing Door, on selected iQ500 models, closes by gently cushioning the last few centimetres for minimal noise and maximum comfort. In addition, a softClosing Door ensures that items within the appliance are not disturbed from a heavy impact, avoiding unnecessary spills to clean.

#### iQ500 varioClip rails.

Selected Siemens iQ500 single and double ovens1 feature a pair of innovative varioClip telescopic rails. Intelligently designed with an easy release system, these rails can be unclipped and repositioned on any of the five shelf positions in the oven<sup>2</sup>, tailoring the position depending on the dish requirements. Whether grilling bacon for breakfast on one of the higher positions, or opting for a lower rail position to cook the Sunday roast, these fully extendable rails perfectly combine flexibility and convenience. Additional pairs of varioClip rails are available as optional extras to personalise the rail systems of each oven.

Please see product descriptions for models that have the rails as standard varioClip rails suited only to the main oven on double o



varioClip rails - designed to be released and repositioned guickly and easily

### Siemens iQ500 double ovens provide a great solution to gain extra flexibility and more cooking space.

Both ovens can be used when entertaining guests for example baking dessert in the main oven whilst heating savoury dishes within the top oven. Sitting seamlessly within the furniture, kitchen space is maximised without sacrificing the extra cavity space.

#### Our double oven with activeClean<sup>®</sup> benefits.

A double oven with top of the range features. Built-in model MB578G5S6B with Home Connect features activeClean® in both the main and top cavity. activeClean® heats up the temperature of the oven to burn residue and allow for easy wipe away cleaning, saving significant time when cleaning the oven. This model also includes the coolStart function, perfect for people always on the go and when needing to heat up frozen and chilled meals quickly.

#### A built-under to fit beneath work surfaces.

Alternatively, with the built-under oven model NB535ABS0B with a fast preheat and 3D hotAir cooking available in the main oven different types of foods can be cooked flexibly on up to 3 shelving positions, without tastes mingling. Its slightly smaller overall size means this double oven can also fit underneath the work surface - ideal when space is limited but an additional cooking cavity is needed.

#### Key features of iQ500 double ovens:



#### 3D hotAir

Can cook all types of food on up to 3 levels simultaneously to stop flavours and smells intermingling.

#### activeClean®



Heating the cavity up to 480°C, activeClean® burns away all dirt and grime. The remaining ashes can then be easily wiped away inside the oven cavity for effortless oven cleaning.



#### cookControl

Provides automatic programmes for the perfect preparation of meat, fish, vegetables and bread. Simply select the desired dish and enter the food's weight - everything else is done automatically. Either 10 or 30 programmes available, depending on the model.



#### No more preheating when cooking chilled and frozen convenience food. Using an intelligent heating phase, it is now possible to cook frozen and chilled food without waiting for the oven to preheat.



fast preheat By activating all heating elements simultaneously, Siemens ovens with fast preheating get to the desired temperature very quickly.





NB535ABS0B built-under double oven



#### ecoClean<sup>®</sup> liners

A direct coating that lines the inside of the oven, ecoClean<sup>®</sup> makes cleaning the oven easy. The coated area cleans itself while the oven is on or can be activated with a cleaning programme. Available either as a full coating on the back, roof and sides or exclusively on the back panel.



#### Electronic control

Depending on the function selected, the oven will suggest a suitable temperature which can be manually adjusted. The selected temperature is displayed digitally and a heating up indicator shows the progress towards the set temperature. The same indicator shows residual heat once the oven is turned off. Get guick access to performance features like cookControl whilst being safe in the knowledge that if left unadjusted for a period of time, the oven will switch off automatically.



#### Single point roastingSensor

By getting an accurate reading of the core temperature of boneless and fatless dishes, the roastingSensor can precisely and reliably measure the internal temperature of each dish to determine when it is perfectly done.



Control the oven simply by using a smartphone or tablet with the Home Connect App to further expand the potential of the oven.

# Explore compact ovens and microwaves

#### Ovens with integral microwave\*

When teamed with a single oven, Siemens iQ700 compact ovens with microwave offer a great alternative to a double oven when more space is needed for traditional cooking. Designed first and foremost to function as an oven, with construction, features and functions identical to a traditional single oven, these models benefit from the addition of microwaves at low medium power (max. 360W) to deliver oven-led combination cooking. Our varioSpeed faster cooking feature speeds up the cooking process while retaining traditional cooking results.

#### Microwave combination Ovens\*

These iQ500 models are designed to provide more functionality than a solo microwave oven, focusing on combination cooking, with the microwave using higher power (max. 600W) to lead the cooking process, supported by hot air or grill functions to deliver speedy crisp and browned results. Based around a more traditional microwave functionality these models offer the perfect solution if regular microwave heating is the priority, but with the back-up of separate or combination hot air cooking and grill functionality if required.

\*These models are designed to operate best in combination mode, so when heating using microwave only, it may be necessary to adjust cooking times

#### Compact Ovens with steam

When looking for healthier cooking options the Siemens range of compact ovens with steam creates healthier meals using the power of steam to deliver juicier meats, crisped and fluffy baked items and vegetables that retain more of their vibrant colours, vitamins and nutrients. Siemens fullSteam models offer pure steam cooking, plus many models also offer pulseSteam - pulses of steam are injected into the oven to work in tandem with traditional cooking functions. Please check individual models for exact specifications.





CM585AGS0B compact microwave combination oven

CP565AGS0B compact microwave combination oven with steam

#### Inverter Technology

CM676GBS6B compact oven

with integral microwave

Inverter Technology delivers microwave power constantly while cooking - other, traditional microwaves are only able to deliver maximum power and manage the differing settings by alternating between on and off for specific time periods. This can result in uneven heating or over-cooked food and can be especially damaging to more delicate foods or smaller portions.

With Inverter technology, the microwave delivers power constantly, gradually managing the power levels down over time in order to control the food temperature. This gentle approach to cooking reduces uneven heating or overheated food and is especially beneficial for delicate foods. It may be necessary to adjust cooking times to ensure foods are thoroughly cooked before serving. Siemens recommends that the maximum power setting be used for heating liquids and the microwave is calibrated to provide a burst of high power initially, before managing the power down in stages to the next level over the first few minutes.



#### Warming and accessory drawers

Perfect for warming plates, a Siemens warming drawer will keep food warm for latecomers – as well as keeping plates at an optimum temperature to ensure hot food keeps it warmth when plated. With adjustable temperatures of 40-80°C, a four-setting iQ700 14cm or 29cm high warming drawer can be installed as a standalone appliance, or acts as the perfect accompaniment to Siemens iQ700 ovens and compacts. If needing additional storage only, a matching 14cm accessory drawer is also available. The iQ500 range includes a 14cm high warming drawer featuring 3 settings – minimum, medium and maximum – designed to coordinate with Siemens iQ500 ovens and compacts. The perfect line up of compact appliances with warming drawer is sure to bring style and elegance to any refined kitchen space.



BI630CNS1B iQ700 warming drawer

# iQ700 oven product overview

Display type	Single Ovens (60cm) with activeClean (pyrolytic/self-cleaning)			Single Ovens (60cm) with ecoClean (non-pyro	olytic)
	Microwave	pulseSteam	Standard	Steam	Standard
TFT touchDisplay Pro	HM778GMB1B O • Cooking functions: 21 • 4D hotAir • cookControl Pro • roastingSensor Plus • varioSpeed • activeClean®		HB778G3B1B O • Cooking functions: 13 • 4D hotAir • cookControl Pro • roastingSensor Plus • activeClean®	H5758G3B1B O • Cooking functions: 22 • 4D hotAir • cookControl Pro • roastingSensor Plus • fullSteam Plus • ecoClean Plus	
TFT touchDisplay Plus	HM776G1B1B • Cooking functions: 19 • 4D hotAir • cookControl Pro • varioSpeed • activeClean®	HR776G1B1B • Cooking functions: 19 • 4D hotAir • cookControl Pro • pulseSteam • activeClean®	HB776G1B1B • Cooking functions: 13 • 4D hotAir • cookControl Plus • activeClean®	HS736G1B1B • Cooking functions: 21 • 4D hotAir • cookControl Pro • fullSteam Plus • ecoClean	HB736G1B1B • • Cooking functions: 13 • 4D hotAir • cookControl Plus • ecoClean
TFT touchDisplay			HB772G1B1B • • Cooking functions: 10 • 3D hotAir • cookControl Plus • activeClean®		HB732G1B1B O • Cooking functions: 10 • 3D hotAir • cookControl Plus • ecoClean

#### iQ700 drawers range

Display type	29cm Drawers	14cm Drawers	
	Warming drawer	Warming drawer	Accessory drawer
All drawers have: • Push/pull opening • Heated ceramic base (excludes Accessory Drawer)	BI710D1B1B • • 29cm height • Maximum capacity • plates 40 • Maximum capacity • espresso cups 192 • Temperature levels 4	BI710C1B1B • • 14cm height • Maximum capacity • plates 12 • Maximum capacity - espresso cups 64 • Temperature levels 4	BI710E1B1 • 14cm height • Maximum capacity - plates 14 • Maximum capacity - espresso cups 64 • Temperature levels n/a






#### 2 year warranty


A two year warranty is available on all Siemens ovens and compact appliances listed in this brochure to protect against manufacturing and material faults during this warranty period.

Compact Microwave		Coffee Centre
Microwave	Microwave with grill	
		CT718L180 C • doubleCup • coffeeWorld • aromaSelect • ceramDrive • autoMilk Clean
CE732GXB1B • cookControl 10 • 1000 Watts maximum • Grill function	BF722L1B1B • cookControl 7 • 900 Watts maximum • Left hinged	

# iQ500 oven product overview

#### iQ500 single oven range

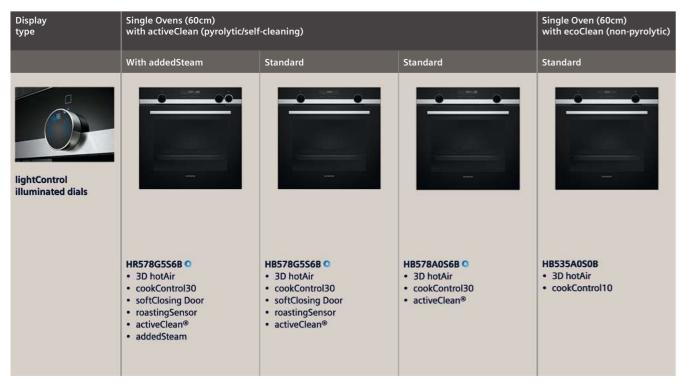


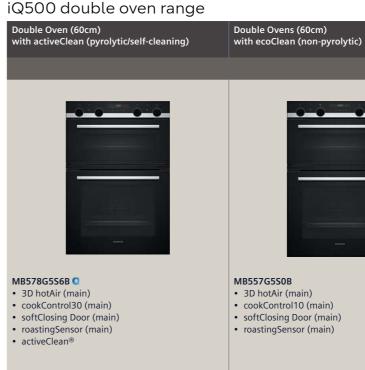


#### iQ500 compact oven and microwave range

Display type	Compact Ovens (45cm)	Compact Microwaves	
	With microwave function	Microwave	Microwave
lightControl illuminated dials	CM585AG50B • cookControl15 • 2 microwave combination options	BF555LMS0B • Automatic programmes: 7	BF525LMSOB • Automatic programmes: 7

#### iQ500 drawer range

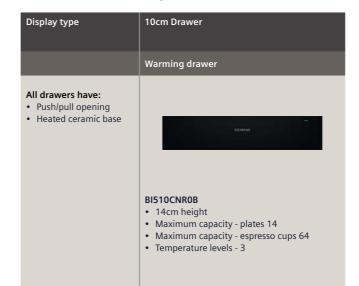

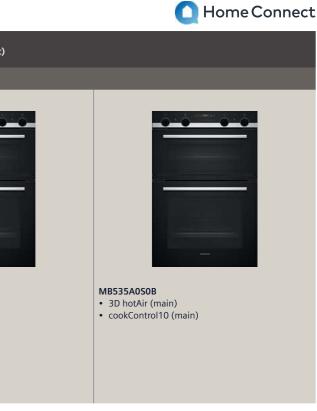



#### 2 year warranty

A two year warranty is available on all Siemens ovens and compact appliances listed in this brochure to protect against manufacturing and material faults during this warranty period.

# Pyrolytic single ovens





#### Q 700 HM778GMB1B

Single multi-function oven with integral microwave Black with steel trim





#### Pyrolytic single ovens specifications

APPLIANCE TYPE	PYROLYTIC OVEN WITH INTEGRAL MICROWAVE
Design family	iQ 700
Model number	HM778GMB1B
DESIGN CHARACTERISTICS	
TFT Touchdisplay Pro	
TFT Touchdisplay Plus	-
TFT Touchdisplay	-
softMove door opening and closing	
SAFETY FEATURES	
Electronic control	
Digital temperature display with proposal	
Heating up indicator / Residual heat indicator	■/■
Control panel lock / Automatic safety switch off	■/■
Door lock	
KEY FEATURES	
Home Connect	
Oven assistant with Voice control	
varioSpeed	
cookControl / cookControl Plus / cookControl Pro	-1-1
roastingSensor / roastingSensor Plus	-1
Oven shelf positions	5
CLEANING SYSTEM	
activeClean® pyrolytic oven cleaning	
humidClean Plus	
Back / roof / side ecoClean® Direct liners	-1-1-
PROGRAMMES / FUNCTIONS	
Number of heating methods	21
hotAir cooking (3D or 4D)	4D
Microwave (number of combination options)	5
coolStart / fast preheat	
Full width surface grill / hotAir grilling / Centre surface grill	
Pizza Setting / Bottom heat / Intensive heat	
Conventional / Conventional gentle	■/■
Keep warm / Plate warming	
Low temperature cooking / Dehydrate	
pulseSteam / fullSteam Plus	-1-
Dough proving / Reheating / Defrost	-1-1-
PERFORMANCE / TECHNICAL INFORMATION	
Product dimensions H x W x D (mm)	595 x 594 x 548
Cavity capacity (litres)	67
Water tank volume (litres)	-
Maximum microwave power (W) <sup>1</sup> / Number of power levels	800 / 5
Nominal voltage (volts)	220-240
Total connected loading (watts)	3600
Cable length (cm)	120
Minimum fuse protection	16A
Interior lights	
Door glazing	 Quadruple
STANDARD ACCESSORIES	
Full width enamelled pan / Wire shelves	1/2
Steam trays	_
Telescopic rails	

■ Yes, model has this feature. – Feature not available for this model.

For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2024. Subject to modification without prior notice.

#### Award Winning Ovens

All ovens on these pages have been accredited with these prestigious design awards.



32

For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

	2 year warranty	2 year warranty	2 year warranty	2 year warranty	2 year warranty
	🚺 Home Connect	Home Connect	Home Connect	🜔 Home Connect	O Home Connect
yrolytic single ovens specifications	PYROLYTIC OVEN	PYROLYTIC OVEN WITH	PYROLYTIC OVEN WITH	PYROLYTIC OVEN	PYROLYTIC OVEN
		MICROWAVE	PULSESTEAM		
Design family	iQ 700 HB778G3B1B	iQ 700 HM776G1B1B	HR776G1B1B	HB776G1B1B	HB772G1B1B
Model number DESIGN CHARACTERISTICS	HB//8G3B1B	HM1/6G1818	HK776G1B1B	HB//6G1B1B	HB112G1B1B
		-	-	-	_
FT Touchdisplay Pro		-			_
FT Touchdisplay Plus	-	-	-	-	
FT Touchdisplay oftMove door opening and closing	-	-			
offMove door opening and closing GAFETY FEATURES	•			• 	
Electronic control					
Digital temperature display with proposal					
leating up indicator / Residual heat indicator					
Control panel lock / Automatic safety switch off					
Door lock					
KEY FEATURES	-			-	
lome Connect	•			•	
	-	-	-		
Oven assistant with Voice control		-			
arioSpeed ookControl / cookControl Plus / cookControl Pro	- 1-1	- 1 - 1 -	-1-1	-/-/■	-/=/-
	-/=	- / - / -		_/_/	-/=/-
oastingSensor / roastingSensor Plus Dven shelf positions	-/-	5	- 5	- 5	5
	5	5	5	5	
CLEANING SYSTEM activeClean® pyrolytic oven cleaning	•			•	
numidClean Plus		-			
Back / roof / side ecoClean® Direct liners	-1-1-	-1-1-	-1-1-	-1-1-	-1-1-
PROGRAMMES / FUNCTIONS	-1-1-	-1-1-		-1-1-	-1-1-
Number of heating methods	13	19	19	13	10
notAir cooking (3D or 4D)	4D	4D	4D	4D	3D
Aicrowave (number of combination options)	-	5	_	_	
oolStart / fast preheat					
ull width surface grill / hotAir grilling / Centre surface grill					
vizza Setting / Bottom heat / Intensive heat					
Conventional / Conventional gentle					
eep warm / Plate warming					_
ow temperature cooking / Dehydrate	■/= ■/-	■/=		/_ ■/-	_
oulseSteam / fullSteam Plus	- /-	- 1-	<b>■</b> / <b>-</b>	_	_
Dough proving / Reheating / Defrost	-1-1-	-1-1-	<b></b> / <b></b> /-	_	_
PERFORMANCE / TECHNICAL INFORMATION			_/_/		
roduct dimensions H x W x D (mm)	595 x 594 x 548	595 x 594 x 548	595 x 594 x 548	595 x 594 x 548	595 x 594 x 548
avity capacity (litres)	71	67	71	71	71
Vater tank volume (litres)	-	-	1	-	-
faximum microwave power (W) <sup>1</sup> / Number of power levels	-1-	800 / 5	-1-	-1-	-1-
lominal voltage (volts)	220-240	220-240	220-240	220-240	220-240
otal connected loading (watts)	3600	3600	3600	3600	3600
able length (cm)	120	120	120	120	120
Ainimum fuse protection	120 16A	120 16A	120 16A	16A	16A
nterior lights					
	Quadruple	Quadruple	Quadruple	Quadruple	Quadruple
loor glazing		A CONTRACTOR OF			
TANDARD ACCESSORIES	1/2	1/2	1/2	1/2	1/2
Door glazing STANDARD ACCESSORIES Full width enamelled pan / Wire shelves Iseam trays	1/2	1/2	1/2	1/2	1/2

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2024. Subject to modification without prior notice.

#### iQ700 pyrolytic single ovens | Cooking

# Single ovens





SINGLE OVEN WITH STEAM FUNCTION

iQ 700

#### iQ 700 HS758G3B1B

Single multi-function oven with steam function **Black with steel trim** 





#### Single ovens specifications

single overis specifications	
APPLIANCE TYPE	SINGLE OVEN WITH STEAM FUNCTION
Design family	iQ 700
Model number	HS758G3B1B
DESIGN CHARACTERISTICS	
TFT Touchdisplay Pro	
TFT Touchdisplay Plus	-
TFT Touchdisplay	-
softMove door opening and closing	
SAFETY FEATURES	
Electronic control	
Digital temperature display with proposal	
Heating up indicator / Residual heat indicator	
Control panel lock / Automatic safety switch off	
KEY FEATURES	
Home Connect	
Oven assistant with Voice control	
varioSpeed	
cookControl / cookControl Plus / cookControl Pro	-1-1
	-/-
roastingSensor / roastingSensor Plus Oven shelf positions	5
	5
CLEANING SYSTEM	
activeClean® pyrolytic oven cleaning	-
humidClean Plus	-
Back / roof / side ecoClean® Direct liners	ecoClean <sup>®</sup> Plus
PROGRAMMES / FUNCTIONS	
Number of heating methods	22
hotAir cooking (3D or 4D)	4D
Microwave (number of combination options)	-
coolStart / fast preheat	■/■
Full width surface grill / hotAir grilling / Centre surface grill	
Pizza Setting / Bottom heat / Intensive heat	
Conventional / Conventional gentle	■/■
Keep warm / Plate warming	
Low temperature cooking / Dehydrate	<b>■</b> <i>1</i> -
pulseSteam / fullSteam Plus	-1
Steam boost	
Dough proving / Reheating / Defrost	
PERFORMANCE / TECHNICAL INFORMATION	
Product dimensions H x W x D (mm)	595 x 594 x 548
Cavity capacity (litres)	71
Water tank volume (litres)	1
Maximum microwave power (W) <sup>1</sup> / Number of power levels	-1-
Nominal voltage (volts)	220-240
Total connected loading (watts)	3600
Cable length (cm)	120
Minimum fuse protection	120 16A
Interior lights	
Door glazing	
STANDARD ACCESSORIES	
	1/2
Full width enamelled pan / Wire shelves	
Steam trays punched / unpunched	2/1
Telescopic rails	

■ Yes, model has this feature. – Feature not available for this model.

For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2024. Subject to modification without prior notice.

#### Award Winning Ovens

All ovens on these pages have been accredited with these prestigious design awards.



For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet.

34 For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

Model number	HS736G1B1B
DESIGN CHARACTERISTICS	
TFT Touchdisplay Pro	-
TFT Touchdisplay Plus	
TFT Touchdisplay	-
softMove door opening and closing	
SAFETY FEATURES	
Electronic control	
Digital temperature display with proposal	
Heating up indicator / Residual heat indicator	
Control panel lock / Automatic safety switch off	■/■
KEY FEATURES	
Home Connect	
Oven assistant with Voice control	
varioSpeed	-
cookControl / cookControl Plus / cookControl Pro	- / - / ■
roastingSensor / roastingSensor Plus	-1-
Oven shelf positions	5
CLEANING SYSTEM	
activeClean® pyrolytic oven cleaning	-
humidClean Plus	
Back / roof / side ecoClean® Direct liners	ecoClean®
PROGRAMMES / FUNCTIONS	ecoclean-
Number of heating methods	21
hotAir cooking (3D or 4D)	4D
Microwave (number of combination options)	-
coolStart / fast preheat	 <b>I</b> / II
Full width surface grill / hotAir grilling / Centre surface grill	
Pizza Setting / Bottom heat / Intensive heat	
Conventional / Conventional gentle	
Keep warm / Plate warming	
Low temperature cooking / Dehydrate	■ / -
pulseSteam / fullSteam Plus	- / 🔳
Steam boost	
Dough proving / Reheating / Defrost	
PERFORMANCE / TECHNICAL INFORMATION	
Product dimensions H x W x D (mm)	595 x 594 x 548
Cavity capacity (litres)	71
Water tank volume (litres)	1
Maximum microwave power (W) <sup>1</sup> / Number of power levels	-1-
Nominal voltage (volts)	220-240
Total connected loading (watts)	3600
Cable length (cm)	120
	16A
Minimum fuse protection	10/1
Minimum fuse protection Interior lights	
Interior lights	-
Interior lights Door glazing	
Interior lights Door glazing	
Interior lights Door glazing STANDARD ACCESSORIES	•

Single ovens specifications

APPLIANCE TYPE

Design family

• Co, index not any reduce. - reactive not available for this model.
<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the applicance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2024. Subject to modification without prior notice.

#### iQ700 single ovens | Cooking

2 year warranty	2 year warranty
Home Connect	O Home Connect
SINGLE OVEN	SINGLE OVEN
iQ 700	iQ 700
HB736G1B1B	HB732G1B1B
-	_
-	
-	
-	-
- / 🖬 / -	- / • / -
5	5
	5
-	-
ecoClean®	ecoClean®
12	10
13 4D	10 3D
-	-
	<b>I</b> / <b>I</b>
■/■/-	■/■/-
■ / ■ ■ /	
-1-	-/-
-	-
-   -   -	-1-1-
595 x 594 x 548 71	595 x 594 x 548 71
-	-
-/-	-/-
220-240	220-240
3600	3600
120	120
16A	16A
_	
1/2	1/2
- / -	- / -

#### iQ 500 HR578G5S6B

#### Single multi-function oven with addedSteam Black, stainless steel





#### Single ovens specifications

Single ovens specifications	
APPLIANCE TYPE	PYROLYTIC OVEN WITH ADDED STEAM
Design family	iQ 500
Model number	HR578G5S6B
DESIGN CHARACTERISTICS	
TFT Touchdisplay Pro	-
TFT Touchdisplay Plus	-
TFT Touchdisplay	-
lightControl illuminated dials	•
softClosing door opening and closing	
SAFETY FEATURES	
Electronic control	
Digital temperature display with proposal	
Heating up indicator/ Residual heat indicator	/
Control panel lock / Automatic safety switch off	
Door lock	
KEY FEATURES	
Home Connect	
roastingSensor Plus	-
bakingSensor Plus	-
roastingSensor	
cookControl Plus	-
cookControl	30
CLEANING FUNCTIONS	_
activeClean® pyrolytic oven cleaning Back / roof / side ecoClean® Direct liners	
ecoClean® setting	
PROGRAMMES / FUNCTIONS	-
hotAir cooking with hotAir gentle	3D
Microwave (number of combination options)	
coolStart / fast preheat	
Full width surface grill / hotAir grilling / Centre surface grill	
Pizza Setting / Bottom heat / Intensive heat	
Conventional / Conventional gentle	, , ■ <i>I</i> -
Keep warm / Plate warming	
Low temperature cooking / Dehydrate	-1-
fullSteam / pulseSteam	-1-
addedSteam	-
Dough proving / Reheating / Defrost	
Descaling programme / Cavity drying function	<i>1−</i>
PERFORMANCE / TECHNICAL INFORMATION	
Product dimensions H x W x D (mm)	595 x 594 x 548
Water tank capacity with empty indicator (litres)	0.2
Inverter technology	-
Maximum microwave power (W) <sup>2</sup> / Number of power levels	-
Nominal voltage (volts)	220-240
Total connected loading (watts)	3600
Cable length (cm)	120
Minimum fuse protection	16A
Interior lights	1 x 25W halogen
Door glazing	Quadruple
ENERGY EFFICIENCY DATA <sup>1</sup>	
Energy efficiency index	95.3
Energy efficiency class	А
Energy consumption per cycle hotAir (kWh)	0.81
Energy consumption per cycle conventional (kWh)	0.99
Oven capacity (litres)	71
Time to cook standard load (mins)	51
Largest baking sheet area (cm)	1290
STANDARD ACCESSORIES	
Full width enamelled pan / Wire shelves	1/2
Steam tray, perforated	-
Telescopic rails	1 x clip rail

2 year warranty

Home Connect

Yes, model has this feature. – Feature not available for this model.

res, moder nas uns reature. - Feature not available for this model.
 <sup>1</sup> According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt).
 <sup>2</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the applicance, the microwave power public listages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2024. Subject to modification without prior notice.





#### Single ovens specifications

APPLIANCE TYPE	PYROLYTIC OVEN
Design family	iQ 500
Model number	HB578G5S6B
DESIGN CHARACTERISTICS	
TFT Touchdisplay Pro	-
TFT Touchdisplay Plus	-
TFT Touchdisplay	-
lightControl illuminated dials	
softClosing door opening and closing	-
SAFETY FEATURES	
Electronic control	
Digital temperature display with proposal	
Heating up indicator/ Residual heat indicator	
Control panel lock / Automatic safety switch off	
Door lock	•
KEY FEATURES	
Home Connect	
roastingSensor Plus	-
bakingSensor Plus	-
roastingSensor	
cookControl Plus	-
cookControl	30
CLEANING FUNCTIONS	_
activeClean® pyrolytic oven cleaning	
Back / roof / side ecoClean® Direct liners	-1-1-
ecoClean® setting	-
PROGRAMMES / FUNCTIONS	25
hotAir cooking with hotAir gentle	3D
Microwave (number of combination options)	-
coolStart / fast preheat	■ /
Full width surface grill / hotAir grilling / Centre surface grill	
Pizza Setting / Bottom heat / Intensive heat Conventional / Conventional gentle	■ / - / -
Keep warm / Plate warming	-1-
Low temperature cooking / Dehydrate	■ / - - / -
fullSteam / pulseSteam addedSteam	-1-
	-1-1-
Dough proving / Reheating / Defrost Descaling programme / Cavity drying function	-1-1-
PERFORMANCE / TECHNICAL INFORMATION	-1-
Product dimensions H x W x D (mm)	595 x 594 x 548
Water tank capacity with empty indicator (litres)	
Inverter technology	
Maximum microwave power (W) <sup>2</sup> / Number of power levels	-
Nominal voltage (volts)	220-240
Total connected loading (watts)	3600
Cable length (cm)	120
Minimum fuse protection	16A
Interior lights	1 x 25W halogen
Door glazing	Quadruple
ENERGY EFFICIENCY DATA1	2 sau apre
Energy efficiency index	95.3
Energy efficiency class	A
Energy consumption per cycle hotAir (kWh)	0.81
Energy consumption per cycle noten (kWh) Energy consumption per cycle conventional (kWh)	0.99
Oven capacity (litres)	71
Time to cook standard load (mins)	50
Largest baking sheet area (cm)	1290
	1250
STANDARD ACCESSORIES	1/2
	1/2

<sup>1</sup> According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt).
<sup>2</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2024. Subject to modification without prior notice.

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

CONTROLUTION HB578A0S6B	CVEN WITH ECOCLEAN®
_	-
-	
-	
	-
	■ <i>1</i> -
	-
	-
	_
_	-
 -	-
- 30	- 10
-/-/-	
3D	3D
 	 /_
■ / ■ /-	■/■/-
■ <i>I</i> – <i>I</i> –	-1-1-
■ <i>I</i>	/ _ _ / _
■ <i>I</i> –	-1-
- 1 -	- 1 -
-1-	
 595 x 594 x 548 _	595 x 594 x 548
 	-
-	-
 220-240	220-240
3600	3600 120
16A	16A
1 x 25W halogen	1 x 25W halogen
 Quadruple	Double
95.3	95.3
 A	A
 0.81	0.81
 71	71
50	44
 1290	1290
1/2	1/2
-	-
 1 x clip rail	1 x clip rail

# Double ovens






BUILT-IN

#### iQ 500 MB578G5S6B

Double oven with activeClean® Black, stainless steel





#### Display family iQ 500 Model numbe DESIGN CHARACTERISTICS 2ND MAIN Black glass with steel trin Glass and metal fascia п lightControl illuminated dials Standard bar handle Telescopic shelf rail softClosing door SAFETY FEATURES MAIN Electronic contro Digital temperature display with proposal Actual temperature display Heating up indicator Residual heat indicator п п Control panel lock п Automatic safety switch off Automatic on/off programme KEY FEATURES MAIN 2ND Home Connect cookControl roastingSensor Electronic clock timer Internal light Smooth enamelled oven interior Full glass inner door Door glazing Number of shelf positions CLEANING SYSTEM MAIN 2ND Pyrolytic cleaning п Back / roof / side ecoClean® liner ecoClean® setting PROGRAMMES / FUNCT MAIN 2ND hotairGentle 3D hotAir cooking Defrosting Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION MAIN Cavity dimensions H x W x D (mm) Product dimensions H x W x D (mm) Nominal voltage (V) / Total connected loading (W) Cable length (cm) / Minimum Fuse Protection ENERGY EFFICIENCY CLASS<sup>1</sup> MAIN 2ND Energy efficiency Index Energy efficiency class Energy consumption per cycle hot air (kWh) Energy consumption per cycle conventional (kWh) Oven capacity (litres) Time to cook standard load (mins) Largest baking sheet area (cm) STANDARD ACCESSORIES MAIN 2ND Full width enamelled pan / wire shelves

Double ovens specifications

APPLIANCE TYPE

Yes, model has this feature. – Feature not available for this model.

1 According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt)

Data valid in this table as of April 2024. Subject to modification without prior notice.



#### Double ovens specifications

APPLIANCE TYPE BUILT-IN Display family G0500		
Model number	MB557G5S0B	
DESIGN CHARACTERISTICS	MAIN	2ND
Black glass with steel trim		
Glass and metal fascia		
lightControl illuminated dials		
Standard bar handle		
Telescopic shelf rail	1 x varioClip	
softClosing door		_
SAFETY FEATURES	MAIN	2ND
Electronic control	_	_
Digital temperature display with proposal	-	_
Actual temperature display	_	_
Heating up indicator		_
Residual heat indicator		_
Control panel lock		
Automatic safety switch off		
Automatic on/off programmer		_
KEY FEATURES	MAIN	2ND
Home Connect	_	-
cookControl	10	_
roastingSensor		_
Electronic clock timer		
Internal light	1 x 25W halogen	1 x 25W halogen
Smooth enamelled oven interior		
Full glass inner door		-
Door glazing	3	3
Number of shelf positions	5	3
CLEANING SYSTEM	MAIN	2ND
Pyrolytic cleaning	_	_
Back / roof / side ecoClean® liners		
ecoClean® setting		
PROGRAMMES / FUNCTIONS	MAIN	2ND
hotairGentle		-
3D hotAir cooking		_
-		_
Defrecting		
Defrosting	-	-
Full width surface grill		
Full width surface grill Centre surface grill	-	
Full width surface grill Centre surface grill Hot air grilling		-
Full width surface grill Centre surface grill Hot air grilling coolStart	- - -	-
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting	-	- - -
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating	- - - -	- - - -
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating Bottom heat	-	- - -
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking		- - - -
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat		- - - - - -
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION	- - - - - MAIN	- - - - - - - 2ND
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION Cavity dimensions H x W x D (mm)		- - - - - -
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION Cavity dimensions H x W x D (mm) Product dimensions H x W x D (mm)	- - - - - - - - - - - - - - - - - - -	- - - - - - - - - - - - - - - - - - -
Full width surface grill Centre surface grill Hot air grilling CoolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION Cavity dimensions H x W x D (mm) Product dimensions H x W x D (mm) Nominal voltage (V) / Total connected loading (W)	- - - - - - - - - - - - - - - - - - -	- - - - - - - - - - - - - - - - - - -
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION Cavity dimensions H x W x D (mm) Product dimensions H x W x D (mm) Nominal voltage (V) / Total connected loading (W) Cable length (cm) / Minimum Fuse Protection	- - - - - - - - - - - - - - - - - - -	- - - - - - - - - - - - - - - - - - -
Full width surface grill Centre surface grill Hot air grilling CoolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION Cavity dimensions H x W x D (mm) Product dimensions H x W x D (mm) Nominal voltage (V) / Total connected loading (W) Cable length (cm) / Minimum Fuse Protection ENERGY EFFICIENCY CLASS'		- - - - - 2ND 166 x 480 x 426 - 0 / 6200 /- 2ND
Full width surface grill Centre surface grill Hot air grilling CcolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION Cavity dimensions H x W x D (mm) Product dimensions H x W x D (mm) Nominal voltage (V) / Total connected loading (W) Cable length (cm) / Minimum Fuse Protection ENERGY EFFICIENCY CLASS' Energy efficiency Index	- - - - - - - - - - - - - - - - - - -	- - - - - - - - - - - - - - - - - - -
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION Cavity dimensions H x W x D (mm) Product dimensions H x W x D (mm) Nominal voltage (V) / Total connected loading (W) Cable length (cm) / Minimum Fuse Protection ENERGY EFFICIENCY CLASS' Energy efficiency Index Energy efficiency class	- - - - - - - - - - - - - - - - - - -	- - - - - 2ND 166 x 480 x 426 - 0 / 6200 /- 2ND
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION Cavity dimensions H x W x D (mm) Product dimensions H x W x D (mm) Nominal voltage (V) / Total connected loading (W) Cable length (cm) / Minimum Fuse Protection ENERGY EFFICIENCY CLASS <sup>1</sup> Energy efficiency Index Energy efficiency class Energy consumption per cycle hot air (kWh)		- - - - - - - - - - - - - - - - - - -
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION Cavity dimensions H x W x D (mm) Product dimensions H x W x D (mm) Nominal voltage (V) / Total connected loading (W) Cable length (cm) / Minimum Fuse Protection ENERGY EFFICIENCY CLASS' Energy efficiency Idex Energy efficiency Idex Energy efficiency Idex Energy consumption per cycle hot air (kWh) Energy consumption per cycle conventional (kWh)	- - - - - - MAIN 357 × 480 × 415 - - - MAIN - - - MAIN - - - - - - - - - - - - -	- - - - - - - - - - - - - - - - - - -
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION Cavity dimensions H x W x D (mm) Product dimensions H x W x D (mm) Nominal voltage (V) / Total connected loading (W) Cable length (cm) / Minimum Fuse Protection ENERGY EFFICIENCY CLASS' Energy efficiency Index Energy efficiency class Energy consumption per cycle hot air (kWh) Energy consumption per cycle conventional (kWh) Oven capacity (litres)		- - - - - - - - - - - - - - - - - - -
Full width surface grill Centre surface grill Hot air grilling CcoolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION Cavity dimensions H x W x D (mm) Product dimensions H x W x D (mm) Nominal voltage (V) / Total connected loading (W) Cable length (cm) / Minimum Fuse Protection ENERGY EFFICIENCY CLASS' Energy efficiency Index Energy efficiency Index Energy efficiency class Energy consumption per cycle hot air (kWh) Energy consumption per cycle conventional (kWh) Oven capacity (litres) Time to cook standard load (mins)		- - - - - - - - - - - - - - - - - - -
Full width surface grill Centre surface grill Hot air grilling coolStart Pizza setting Conventional top & bottom heating Bottom heat Low temperature cooking Fast preheat PERFORMANCE / TECHNICAL INFORMATION Cavity dimensions H x W x D (mm) Product dimensions H x W x D (mm) Nominal voltage (V) / Total connected loading (W) Cable length (cm) / Minimum Fuse Protection ENERGY EFFICIENCY CLASS' Energy efficiency Index Energy efficiency class Energy consumption per cycle hot air (kWh) Energy consumption per cycle conventional (kWh) Oven capacity (litres)		- - - - - - - - - - - - - - - - - - -

1 According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt) Data valid in this table as of April 2024. Subject to modification without prior notice.

#### For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. 38

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.



BUILT-IN				
iQ 500				
MB535A0S0B				
MAIN 2ND				
	1			
	l			
-	1			
1 x varioClip	-			
-	-			
MAIN	2ND			
-	-			
-	-			
	-			
	-			
-	-			
-	-			
MAIN	- 2ND			
-				
10				
-	-			
1 x 25W halogen	1 x 25W halogen			
2	3			
5	3			
MAIN	2ND			
_	_			
■ / - / -				
MAIN	2ND			
	-			
	_			
_	_			
•				
-				
_	_			
-	-			
_				
_	_			
	_			
MAIN	2ND			
357 x 480 x 415	166 x 480 x 426			
-	-			
220-240	0/6200			
	I			
MAIN	2ND			
95.3	120.3			
А	В			

1.	3
MAIN	2ND
1290	1290
44	45
71	34
0.97	0.83
0.81	-
А	В
95.3	120.3

# Compact ovens





**iQ 700 CM778GNB1B** 

Compact pyrolytic oven with integral microwave Black with steel trim





#### Compact ovens specifications

compact overis specifications	A second
APPLIANCE TYPE	COMPACT OVEN WITH MICROWAVE FUNCTION
Design family	iQ 700
Model number	CM778GNB1B
DESIGN CHARACTERISTICS	
TFT Touchdisplay Pro	
TFT Touchdisplay Plus	-
TFT Touchdisplay	-
softMove door opening and closing	
SAFETY FEATURES	
Electronic control	
Digital temperature display with proposal	
Heating up indicator / Residual heat indicator	-1
Control panel lock / Automatic safety switch off	
Door lock	
KEY FEATURES	
Home Connect	
Oven assistant with Voice control	
varioSpeed	
cookControl / cookControl Plus / cookControl Pro	-1-1
roastingSensor / roastingSensor Plus	-1
bakingSensor Plus	
Oven shelf positions	3
CLEANING SYSTEM	
activeClean® pyrolytic oven cleaning	•
humidClean Plus	-
Back / roof / side ecoClean® Direct liners	-
Drying programme	•
Cleaning and descaling programme	-
COOKING PROGRAMMES	
Number of heating methods	21
hotAir cooking (3D or 4D)	4D
Microwave (combination)	
coolStart / fast preheat	7
Full width grill / Half width grill / hotAir grilling	
Pizza Setting / Bottom heat / Intensive heat	
Conventional / Conventional gentle	
Keep warm / Plate warming	
Low temperature cooking / Dehydrate	
pulseSteam / fullSteam Plus	-1-
steamBoost	
Dough proving / reheating / defrost PERFORMANCE / TECHNICAL INFORMATION	-1-1-
Product dimensions H x W x D (mm)	455 x 594 x 548
Cavity capacity (litres)	45
Water tank volume (litres)	+5
Nominal voltage (volts)	220-240
Total connected loading (watts)	3600
Maximum microwave power (W) <sup>1</sup> / Number of power levels	900/5
Cable length (cm)	150
Minimum fuse protection	150 16A
	10/1
Interior lights	
Interior lights	
Door glazing	
Door glazing STANDARD ACCESSORIES	-
Door glazing STANDARD ACCESSORIES Full width enamelled pan / Wire shelves	
Door glazing STANDARD ACCESSORIES	-

■ Yes, model has this feature. – Feature not available for this model.

i.e., movements and reactive. - reactive not available for this model.
 <sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2024. Subject to modification without prior notice.

#### Award Winning Compact Ovens

All compact ovens on these pages have been accredited with these prestigious design awards.

40



Minimum fuse protection
Interior lights
Door glazing
STANDARD ACCESSORIES
Full width enamelled pan / Wire shelves
Steam trays
Telescopic rails

#### For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

	Back / ro
	Drying p
	Cleaning
	COOKIN

NCE TYPE	COMPACT MICROWAV
family	iQ
umber	CM77
CHARACTERISTICS	
chdisplay Pro	
chdisplay Plus	
chdisplay	
e door opening and closing	
FEATURES	
ic control	
emperature display with proposal	1
up indicator / Residual heat indicator	
panel lock / Automatic safety switch off	
k	
70050	

	2 year warranty	2 year warranty	2 year warranty	2 year warranty
	O Home Connect	Home Connect	Home Connect	Home Connect
Compact ovens specifications				-
APPLIANCE TYPE	COMPACT OVEN WITH MICROWAVE FUNCTION	COMPACT OVEN WITH MICROWAVE FUNCTION	COMPACT OVEN WITH MICROWAVE FUNCTION	COMPACT OVEN WITH STEAM FUNCTION
Design family	iQ 700	iQ 700	iQ 700	iQ 700
Model number	CM776G1B1B	CM736G1B1B	CM724G1B1B	CS736G1B1
DESIGN CHARACTERISTICS				
TFT Touchdisplay Pro	-	-	-	-
TFT Touchdisplay Plus			-	
TFT Touchdisplay	-	-		-
softMove door opening and closing				
SAFETY FEATURES Electronic control				
Digital temperature display with proposal				
Heating up indicator / Residual heat indicator	 	 		
Control panel lock / Automatic safety switch off		-/=	-/	
Door lock		_	_	
KEY FEATURES				
Home Connect				
Oven assistant with Voice control				
varioSpeed				-
cookControl / cookControl Plus / cookControl Pro	-1-1	-1-1	-1-1	-1-1
roastingSensor / roastingSensor Plus	-/-	-1-	-/-	-1-
bakingSensor Plus Oven shelf positions	3	3	3	3
CLEANING SYSTEM		5	5	, j
activeClean® pyrolytic oven cleaning		_	-	-
humidClean Plus	-	-	-	
Back / roof / side ecoClean® Direct liners	-	ecoClean®	-	ecoClean®
Drying programme				
Cleaning and descaling programme	-	-	-	
COOKING PROGRAMMES				
Number of heating methods	19	19	15	21
hotAir cooking (3D or 4D) Microwaya (combination)	4D	4D	2D	4D
Microwave (combination) coolStart / fast preheat			-1-	
Full width grill / Half width grill / hotAir grilling				
Pizza Setting / Bottom heat / Intensive heat			-/=/-	■/■/-
Conventional / Conventional gentle	■/■	■/■	■/■	■ / ■
Keep warm / Plate warming	■/■	■/■	- / 🔳	■/■
Low temperature cooking / Dehydrate	■ <i>I</i> -	■ / -	-1-	■/-
pulseSteam / fullSteam Plus	- 1 -	-1-	- / -	- / 🗖
steamBoost	-	-	-	
Dough proving / reheating / defrost	-1-1-	-1-1-	-1-1-	
PERFORMANCE / TECHNICAL INFORMATION	455 x 594 x 548	455 × 504 × 540	455 × 504 × 540	455 x 504 - 540
Product dimensions H x W x D (mm) Cavity capacity (litres)	455 x 594 x 548 45	455 x 594 x 548 45	455 x 594 x 548 45	455 x 594 x 548 47
Water tank volume (litres)	45	45	45	47
Nominal voltage (volts)	220-240	220-240	220-240	220-240
Total connected loading (watts)	3600	3600	3600	3300
Maximum microwave power (W) <sup>1</sup> / Number of power levels	900 / 5	900 / 5	900 / 5	-1-
Cable length (cm)	150	150	150	150
Minimum fuse protection	16A	16A	16A	16A
Interior lights				
Door glazing				
STANDARD ACCESSORIES				
Full width enamelled pan / Wire shelves	1/1	1/1	1/1	1/1
Steam trays Telescopic rails	-	-	-	3
	-	-	-	

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2024. Subject to modification without prior notice.

#### **1Q 500 CM585AGS0B**

Compact oven with microwave function **Black with steel trim** 





#### Compact ovens specifications

Compact ovens specifications	
APPLIANCE TYPE	COMPACT OVEN WITH MICROWAVE FUNCTION
Design family	iQ 500
Model number	CM585AGS0B
DESIGN CHARACTERISTICS	
TFT Touchdisplay Pro	-
TFT Touchdisplay Plus	-
TFT Touchdisplay	-
LCD display with lightControl illuminated dials	
Soft closing door	-
SAFETY FEATURES	
Electronic control	
Digital temperature display with proposal	-
Heating up indicator / Residual heat indicator	-1-
Control panel lock / Automatic safety switch off	1
Door lock	-
KEY FEATURES	
Home Connect	-
roastingSensor Plus	-
bakingSensor Plus	-
cookControl	15
cookControl Plus	-
CLEANING FUNCTIONS	
activeClean® pyrolytic oven cleaning	-
Back / roof / side ecoClean® Direct liners	-1-1-
ecoClean® setting	-
PROGRAMMES / FUNCTIONS	
hotAir cooking with hotAir gentle	Standard
Microwave (number of combination options)	2
coolStart / Pre-heating	-1-
Full width surface grill / Hot air grilling / Centre surface grill	
Pizza setting / Bottom heat / Intensive heat	-1-1-
Conventional / Conventional eco	-1-
Low temperature cooking / Keep warm	<i>I-</i>
fullSteam / pulseSteam	-1-
addedSteam	-
Dough proving / Reheating / Defrost	-1-1-
Cleaning & Descaling programme / Drying	-1-
PERFORMANCE / TECHNICAL INFORMATION	
Product dimensions H x W x D (mm)	455 x 594 x 570
Water tank capacity with empty indicator (litres)	-
Inverter technology	-
Maximum microwave power (W) <sup>2</sup> / Number of power levels	900 / 5
Nominal voltage (volts)	220-240
Total connected loading (watts)	3350
Cable length (cm)	180
Minimum fuse protection	16A
Interior lights	
Door glazing	Double
ENERGY EFFICIENCY DATA <sup>1</sup>	
Energy efficiency index	-
Energy efficiency class	-
Energy consumption per cycle hotAir (kWh)	-
Energy consumption per cycle conventional (kWh)	-
Oven capacity (litres)	44
Time to cook standard load (mins)	-
Largest baking sheet area (cm)	-
STANDARD ACCESSORIES	
Full width enamelled pan / Wire shelves	-1-
Full width enamelled pan / Wire shelves Steam tray, perforated (S,L,XL) / unperforated (S,L,XL) Telescopic rails	

2 year warranty

Tes, moder has this relative. – Predute not available for this mode.
 According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt).
 For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2024. Subject to modification without prior notice.

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

# Microwaves



#### iQ 700 CE732GXB1B

Microwave oven with grill Black with steel trim

	-		
0 1	44	6-D	2-0
	SIEMEN	٩S	

Microwave IBO<sup>0</sup> Electronic control 2 year

#### . .. . . . .

MICROWAVE OVEN WITH GRILL
iQ 700
CE732GXB1B
Top, horizontal
Double
90
•
•
■1-1-
455 x 594 x 564
36
1000
220-240
3100
150
16A

<sup>1</sup> For inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2024. Subject to modification without prior notice.

Aicrowave specifications	
APPLIANCE TYPE	MICROWAVE
Design family	iQ 700
Model number	BF722L1B1B
DESIGN CHARACTERISTICS	
TFT touchdisplay Pro	-
TFT touchdisplay Plus	_
TFT touchdisplay	
Side opening door (left hinged)	
Control panel position	Bottom, horizontal
CONTROLS	
Electronic control	•
Automatic programmes	
Safety switch off	-
KEY FEATURES	
Home Connect	-
Oven assistant with Voice control	-
Installation in wall unit / tall housing	■ / ■
Electronic clock	-
ClearText Display	-
Full glass inner door	-
Glazed door (Quadruple/Triple/Double)	Double
Maximum cooking time duration (mins)	90
Stainless steel interior	
Microwave	
Quartz grill	-
Microwave / grill combination	-
cookControl / cookControl Plus / cookControl Pro	■ / - / -
PERFORMANCE / TECHNICAL INFORMATION	
Product dimensions H x W x D (mm)	382 x 594 x 318
Oven capacity (litres)	21
Maximum microwave power (W)1	900
Number of microwave power levels	5
Nominal voltage (volts)	220-240
Total connected load (kWh)	1220
Cable length cm	175
Minimum fuse protection	16A
GB plug	-
STANDARD ACCESSORIES	
Glass pan / Insert grid	-1-

2 year warranty

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> For inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2024. Subject to modification without prior notice.

#### Award Winning Microwaves

All microwaves on these pages have been accredited with these prestigious design awards.



For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet.

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

44

iQ700 microwaves | Cooking

#### IQ 500 BF555LMS0B

#### Microwave Black with steel trim





#### Microwave specifications APPLIANCE TYPE MICROWAVE iQ 500 Design family Model number Black glass with steel trim DESIGN CHARACTERISTICS Stainless steel navigation control dial TFT Display touchControl Side opening door Control panel position CONTROLS Electronic control Automatic programmes Safety switch off PROGRAMMES / FUNCTIONS Microwave Quartz Grill Microwave / grill combination FEATURES Installation in wall unit / tall housing Full width frameless design Electronic clock ClearText Display Full glass inner door Glazed door (Quadruple/Triple/Double) Memory settings Maximum cooking time duration (mins) Electronic door opening Hinge Internal light Stainless steel interior PERFORMANCE / TECHNICAL INFORMATION Cavity H x W x D (mm) Appliance dimensions H x W x D (mm) Oven capacity (litres) Inverter technology Maximum Microwave power (W)<sup>1</sup> Number of Microwave power levels Mircrowave distrbution Turntable diameter (mm) Total connected load (kWh) Cable length (cm) GB plug Minimum fuse protection STANDARD ACCESSORIES Glass pan / Insert grid

2 year warranty

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> For inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2024. Subject to modification without prior notice.

APPLIANCE TYPE	MICROWAVE
Design family	iQ 500
Model number	BF525LMS0B
Black glass with steel trim	•
DESIGN CHARACTERISTICS	
Stainless steel navigation control dial	-
TFT Display	-
touchControl	touchSlider
Side opening door	
Control panel position	Right, vertical
CONTROLS	
Electronic control	
Automatic programmes	7
Safety switch off	•
PROGRAMMES / FUNCTIONS	
Microwave	
Quartz Grill	-
Microwave / grill combination	-
FEATURES	
Installation in wall unit / tall housing	201 x 308 x 282
Full width frameless design	382 x 594 x 317
Electronic clock	20
ClearText Display	-
Full glass inner door	800
Glazed door (Quadruple/Triple/Double)	5
Memory settings	Turntable
Maximum cooking time duration (mins)	255
Electronic door opening	1.27
Hinge	130
Internal light	
Stainless steel interior	10A
PERFORMANCE / TECHNICAL INFORMATION	
Cavity H x W x D (mm)	201 x 308 x 282
Appliance dimensions H x W x D (mm)	382 x 594 x 317
Oven capacity (litres)	20
Inverter technology	_
Maximum Microwave power (W) <sup>1</sup>	800
Number of Microwave power levels	5
Mircrowave distrbution	Turntable
Turntable diameter (mm)	255
Total connected load (kWh)	1.27
Cable length (cm)	130
GB plug	
Minimum fuse protection	10A
protection	
STANDARD ACCESSORIES	

Microwave specifications

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2024. Subject to modification without prior notice.

2 year warranty iQ500 microwaves | Cooking

# Drawers

#### iQ 700 BI710D1B1B

Warming drawer Black



Home Connect					
Electronic	2 year				
control	warranty				

#### Home Connect

		Home Connect	
Warming drawers specifications			
APPLIANCE TYPE	WARMING DRAWER	WARMING DRAWER	ACCESSORY DRAWER
Model number	BI710D1B1B	BI710C1B1B	BI710E1B1
Design family	iQ 700	iQ 700	iQ 700
KEY FEATURES & FUNCTIONS			
Home Connect			-
Operating indicator light			-
Electronic control			_
Rotary temperature dial		-	-
Touch control illuminated	•		-
Maximum temperature (°C)	80	80	_
Minimum temperature (°C)	30	30	-
Maximum capacity - plates	40	12	14
Maximum capacity - espresso cups	192	64	64
Toughened glass base			Anti-slip mat
Plate and cup warming			-
Keep warm			-
Defrost			-
Low temperature cooking			-
TECHNICAL INFORMATION			
Appliance Dimensions (H x W x D mm)	290 x 594 x 518	140 x 594 x 518	140 x 594 x 518
Install independently			
Install with compact appliance	iQ 700	iQ 700	iQ 700
Install with a single oven	iQ 700	iQ 700	iQ 700
Push-Pull opening mechanism			
Drawer interior volume (L)	54	20	20
Installation in a tall housing	•		
Installation under work surface	•		
Maximum weight capacity (kg)	25	25	15
Total connected loading (kW)	0.82	0.82	-
Cable length (in cm)	175	175	-
Minimum fuse protection	10A	10A	-
GB plug			_

GB plug Yes, model has this feature. – Feature not available for this model. Data valid in this table as of April 2024. Subject to modification without prior notice.

#### Award Winning Drawers

All drawers on this page have been accredited with these prestigious design awards.



For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet.

48 For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

#### IQ 500 BI510CNR0B

Warming drawer Black

	2004
SIEMENS	

pecifications	
APPLIANCE TYPE	WARMING DRAWER
Model number	BI510CNR0B
Design family	All <b>iQ 500</b> models
KEY FEATURES & FUNCTIONS	
Operating indicator light	
Electronic control	-
Rotary temperature control dial	
Number of temperature settings	3
Number of vacuum seal time settings	-
Number of vacuum sealing levels – bags / containers	-
Glass safety lid	-
Maximum temperature (°C)	80
Minimum temperature (°C)	40
Maximum capacity – plates	14
Maximum capacity – espresso cups	64
Toughened glass base	Anti-slip mat
Vacuum Drawer	-
Plate warming	
Hold Warm	
Defrost	
Low temperature cooking	-
TECHNICAL INFORMATION	
Install independently	
Install with compact appliance	iQ 500
Install with a single oven	iQ 500
Push-Pull opening mechanism	
Drawer interior volume (litres)	23
Installation in a tall housing	
Installation under work surface	
Maximum weight capacity (kg)	15
Total connected loading (kW)	0.40
Cable length (in cm)	150
Appliance Dimensions (H x W x D mm)	140 x 594 x 540
Minimum Fuse Protection	6A
GB plug	

Data valid in this table as of April 2024. Subject to modification without prior notice.

iQ700 and iQ500 drawers | Cooking



# Accessories





HZ86S000 Glass serving dish

HZ629070 Air fryer and grill tray in anthracite

11



HZ638000 1 level telescopic shelf rails with stop, fully extendible

HZ6BMA00 Metal platform and brackets

Optional accessories		IQ	IQ700		IQ500	
opu		Single Ovens	45cm Compact Ovens	Single Ovens	Compact Ovens	Double Ovens*
AIR FRYING, ROA	STING & BAKING ACCESSORIES					
HZ86S000	Glass serving dish - approx 40 x 25cm - for iQ700 ovens and compact ovens and iQ500 ovens	-			-	
HZ629070	Air fryer and grill tray in anthracite. Required for Air Fry Function, required for Air Fry Function (function not available as standard, requires download via Home Connect), for iQ700 ovens			-	-	-
HZ530000	2 piece half depth enamelled pan set	-	-	-	-	-
TELESCOPIC RAIL	S					
HZ638000	1 level telescopic shelf rails with stop, fully extendible, for non pyrolytic*, non-full steam iQ700 ovens*	■*	∎*	-	-	-
HZ638070	Level independent telescopic shelf rails with stop, fully extendible, for iQ700 pyrolytic ovens*	■*	∎*	-	-	-
HZ638D00	Level independent telescopic shelf rails with stop, fully extendible, for iQ700 steam ovens*	<b>■</b> *	∎*	-	-	-
HZ538000	1 pair of level independent varioClip telescopic rails for iQ500 single and double ovens	-	-		-	-
INSTALLATION A	CCESSORIES					
HZ6BMA00	Metal platform and brackets suited to combinations of iQ700 60cm Single ovens and 45cm Compact ovens in column (special single aperture required)			-	-	-
H766X600	Cosmetic decor strip for use between 60cm single and 45cm compact ovens					

\*Main cavity only Optional accessories not suited for use during pyrolytic cleaning unless stated Data valid in this table as of Aprl 2024. Subject to modification without prior notice.





HZ530000 Two-piece half depth enamelled pan set





HZ538000 Level independent varioClip telescopic rails



# Pure precision for perfect coffee indulgence

### Immerse yourself in the world of coffee.

The Siemens fully automated built-in coffee machine is designed to deliver a great coffee experience, thanks to the interaction of all components – a result of our years of experience and strong commitment to research and development.

#### Pure precision for perfect coffee indulgence with our built-in coffee machine.

Our iQ700 built-in coffee centre conveys an elegant impression of absolute quality and intelligent innovation for those passionate about coffee.

The design of the iQ700 coffee centre is perfectly aligned with the entire iQ700 series. To keep the sleek lines looking clean, all milk, water and bean containers are conveniently hidden behind the coffee centre's door, while the TFT touchDisplay and LED lights put each coffee in the spotlight.

Designed with easy access to the water tank, bean holder and insulated milk jug, the coffee centre has front access thanks to a hinged front panel to allow quick and easy access to replace the water or beans. The milk tubes are also cleaned with steam after every coffee with milk and as most of the components are removable and dishwasher safe, they are also easy to clean. Easy to install, the machine requires no extra plumbing.





#### oneTouch function

The Siemens coffee machine can deliver delicioustasting coffee – from latte macchiato, creamy cappuccino to extra-strong espresso at the touch of a button. The system prepares coffee and milk specialities automatically, which can be customised to the user preference.



sensoFlow system Different coffees require the espresso shot to be heated at a different temperature in order to achieve the perfect results. sensoFlow does this automatically, every time.

#### A wide world of coffee to experience.

Get more with Siemens bean-to-cup coffee machines and built-in model with Home Connect. The app gives access to exclusive coffee drinks and intuitive remote functions directly via a smartphone, smart watch, tablet or voice assistant.

#### Home Connect

With the Home Connect app additional features and drinks are available. Select the coffee with coffeeWorld on a smart device, or ask a voice assistant to make it for you. Push notifications are sent from the machine, for example, when the beans are running low or when the machine needs cleaning.

The coffeePlaylist allows creation of a list where each guest can personalise their own drink and remotely send the order to the machine so they are automatically prepared one after another.

Connected partners including Amazon Alexa, offer additional flexibility like making a drink using voice control whilst IFTTT allows the creation of bespoke applets connecting the coffee machine to other smart home appliances to create personalised routines.

#### iQ 700 CT718L1B0

Built-in coffee centre Black



Home Connect BD<sup>a</sup> Electronic Electronic

#### Award Winning Coffee Machine

The Coffee Machine on this page has been accredited with these prestigious design awards.









#### Built-in coffee centre specifications

specifications	
APPLIANCE TYPE	COFFEE CENTRE – BUILT-IN
Design family	iQ 700
Model number	CT718L1B0
TFT Touchdisplay Pro	
TFT Touchdisplay	-
KEY FEATURES	
Home Connect	
Electronic control	
sensoFlow System	
AromaDoubleShot	
Automatic steam blast milk cleaning function	
oneTouch preparation	
Ceramic coffee grinders	
Multilevel grinding setting	
Cup illumination	
Height adjustable coffee & milk outlets (mm)	
Integrated water filter	Optional
PROGRAMMES / FUNCTIONS	
Type of beverages	21
my Coffee - personalised beverage settings	1 or 2 cup
Milk foam	1 or 2 cup
Hot water	1 or 2 cup
Warm milk	1 or 2 cup
Ristretto	1 or 2 cup
Coffee	1 or 2 cup
Espresso	1 or 2 cup
Cappuccino	1 or 2 cup
Latte Macchiato	1 or 2 cup
Caffe latte	1 or 2 cup
Espresso Macchiato	1 or 2 cup
One touch function for milk drinks	
Coffee / Hot water temperature options	3 / 4
Milk foam / frothing function	
Warm Milk function	
Cleaning / descaling / programmes	■ / ■
Automatic rinse when switched on/off	■ / ■
PERFORMANCE / TECHNICAL INFORMATION	
Installation in a tall housing	
Side opening door (left hinged)	
Bean container capacity (g)	500
Ground coffee container	
Water tank capacity (litres)	2.4
Total connected loading (W)	1500
Nominal voltage (volts)	220-240
Fuse protection	10A
Cable length (in cm)	170
STANDARD ACCESSORIES	
Insulated Milk container capacity (litres)	0.5
Milk pipe	
Vos. model has this feature — Eesture not available	fan this madel

■ Yes, model has this feature. – Feature not available for this model.

Data valid in this table as of April 2024. Subject to modification without prior notice

#### The Siemens iAroma System





The long-lasting ceramic grinder creates the ideal ground coffee for perfect aroma.



The smart water pump - for the right water pressure every time.



TQ907GB3 EQ900 S700 fully automatic espresso machine

Model shown:

# At home. In style

Delicious barista-style drinks at home with the Siemens EQ freestanding bean-to-cup coffee machines.

The world of cafe culture is at hand with the exciting range of EQ fully automatic bean-to-cup coffee machines designed for those that settle for nothing less than exceptional coffee.

With intelligent iAroma technology, 3 key innovations are combined together in a high quality brewing unit to deliver truly sensational tasting beverages. These intuitive appliances stand out on any premium kitchen surface with their stunning design, elegant display panels and optimal usability. From the entry-level compact EQ300 models to the fine-tuned connected EQ700 and EQ900 models.

#### Our top of the range machine: EQ900 S700




#### baristaMode: Individualise your coffee creation There are five essential parameters of baristaMode that contribute to the quality of coffee and espresso: coffee

strength, amount, temperature, coffee-to-milk ratio and brewing speed. The baristaMode allows for even finer, fully customised adjustments to please any coffee taste. Alternatively in comfortMode the machine makes these adjustments automatically leaving only the option to personalise strength and aroma.




#### oneTouch DoubleCup





#### dualBean System: Separate bean containers for a pure taste

Two separate coffee bean containers, each with its own grinder, ensure that the beans never get mixed up and guarantee that the desired flavour will always be achieved



Many factors influence the flavour profile of a coffee bean. The region where it is cultivated, with its specific climate and soil, as well as the type of roasting, all play a part. The beanIdent System optimally adjusts all brewing settings to ensure the full aromas are extracted. Simply enter the variety and roasting level and let the EQ900 work its magic.

#### TFT display



The large, clear and colourful TFT display and disc control make managing drink preferences simple and intuitive with the EQ900 S700 machine.



superSilent Optimised soundproofing enables the most remarkable noise reduction.





Perfect pleasure at the touch of a button: oneTouch function.



No matter the coffee speciality whether it is latte macchiato, creamy cappuccino or extra-strong oneTouch Function this fully automatic coffee machine can serve up pure coffee indulgence at the touch of a button.



espresso, thanks to the



Experience the unique iAroma System available with Siemens fully automatic espresso machines: Innovative features work seamlessly together to guarantee the perfect taste and long-lasting product.







The intelligent flow heater guarantees the perfect temperature every time.





The high-tech brewing unit creates great aroma thanks to its fine-tuned and precision controlled brewing operation.

For longer-lasting coffee indulgence: calc'nClean.

Maximise beverage quality, product lifetime and overall hygiene of the EQ coffee machine with the combined cleaning and descaling programme. Easy to use, calc'nClean provides a thorough clean and rinse, keeping the machine perfectly clean inside.



For busy mornings and tired evenings: Drinks on demand.

All our coffee machines have a minimum of 4 pre-set drinks available to select from the display. From the EQ300 models that have the option of Americano, Cappuccino, Espresso and Latte Macchiato all the way through to the top EQ700 model that offers all of these plus 7 more drink options. The Home Connect App allows access to an even wider, ever-growing range of beverage options with coffee world.

# Freestanding coffee machines

#### TQ907GB3

EQ900 S700 Fully Automatic Espresso Machine **Stainless steel** 







Ľ reddot winner 2022 O Home Connect

EQ700 Int.

TQ703GB7

Inox silver & blac

Ceramdriv

Integrated

350g

2.4

18

iSelect Display

19 bar

incl. milky drinks

4

0

4

Quiet

Home Connec

10

Spindle

Side

Aroma Select

Ľ reddot winner 2022 Home Connect



EQ900 S300

TQ903GB9

Ceramdriv

Integrated

375g

2.3

21

TFT

19 bar

inc. milky drink

Barista Mode

Barista Mode

Barista Mode

Super silent

Home Connect

Spindle

Side

Ľ



EQ700 Classic +

TP705GB1

Ceramdriv

Milk Pipe

350g

2.4

18

iSelect Display

19 bar

incl. milky drinks

Quiet

Home Connect

10

Spindle

Side

Aroma Select

ning haze & black

EO700

Fully Automatic Espresso Machine Fully Automatic Espresso Machine

Freestanding bean-tocup coffee machine specifications

Yes, model has this feature. – Feature not available for this model.

Data valid in this table as of April 2024. Subject to modification without prior notice.



	EC	EQ500		EQ300		
Model name	EQ500+ Home Connect Fully Automatic Espresso Machine	EQ500 Fully Automatic Espresso Machine	EQ300+ Fully Automatic Espresso Machine	EQ300 Fully Automatic Espresso Machine		
Model number	TQ518GB3	TQ513GB1	TF303G07	TF301G19		
FEATURES						
Material / finish	Black steel front	Silver lacquer front	Lacquer front	Piano black		
SensoFlow Heater						
Ceramic grinder	Ceramdrive	Ceramdrive	1 x ceramic	1 x ceramic		
Milk solution	Integrated	Integrated	Milkperfect	Milkperfect		
beanldent System	-	-	-	_		
Bean container capacity (g)	270g	270g	250g	250g		
Water tank capacity (litres)	1.7	1.7	1.4	1.4		
One touch drinks						
Removable brewing unit						
Beverage choice	10	10	4 + Milk Foam	4 + Milk Foam		
Display	TFT / touch	TFT / touch	Text & symbol	Text & symbol		
Pump Pressure	15 bar	15 bar	15 bar	15 bar		
oneTouch DoubleCup		Black only	Black only	-		
Strength settings	5	5	5	3		
Temperature settings	3	3	1	1		
Cup size settings	5	5	-	-		
Coffee-milk ratio adjusts	-	-	-	-		
Noise level	Quiet	Quiet	Standard	Standard		
Number of bean grinders	1	1	1	1		
Connectivity	-	-	-	-		
User Profiles	-	-	-	-		
Cup warmer		-	-	-		
Bean lid rubber seal	-	-	_	-		
Brewing unit type	Spindle	Spindle	Spindle	Spindle		
Service door access	Front	Front	Front	Front		
Barista mode	-	-	-	_		
Cup illumination	-	-	-	-		

Yes, model has this feature. – Feature not available for this model

Cup size settings

Noise level

User Profiles

Cup warmer

Bean lid rubber seal

Brewing unit type

Barista mode

Cup illumination

Service door access

Coffee-milk ratio adjusts

Number of bean grinders Connectivity

Data valid in this table as of April 2024. Subject to modification without prior notice

Barista Mode

Super sile

```
For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet.
56
          For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.
```

Barista Mode

Super silent

Home Connec

10


Spindle


Side



### Oven technical diagrams

#### Single ovens HM778GMB1B, HB778G3B1B, HM776G1B1B, HB776G1B1B, HB736G1B1B, HB772G1B1B and HB732G1B1B





19.5

595

max. 487.5


7.5


18

548 -

A: 19.5 mm B: Space for appliance connection 320 x 115 mm C: Ventilation space in the base min. 200 cm<sup>2</sup>


#### Single ovens HR578G5S6B and HB578G5S6B



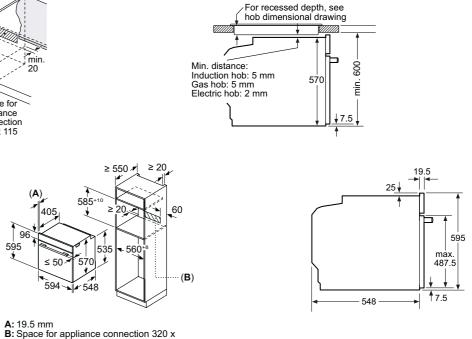





#### Single ovens HB578A0S6B and HB535A0S0B







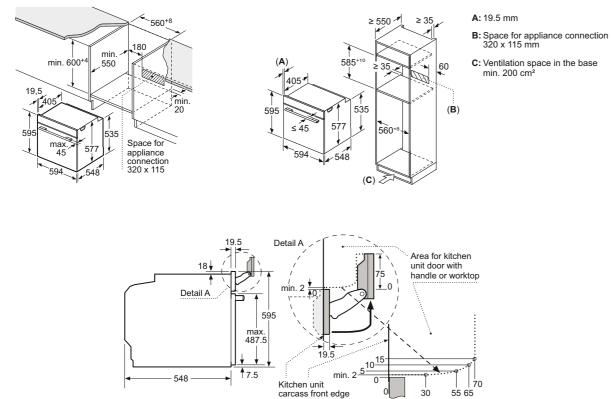


Note the pivoting range of the fascia.

#### Measurements in mm. Line drawings are for reference only. Please download the latest installation guidelines from siemens-home.bsh-group.com/uk Siemens cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

58

Installation with a hob.

Installation with a hob.




### Oven technical diagrams


#### Double ovens MB578G5S6B, MB557G5S0B and MB535A0S0B

19.5


145 405


Space for appliance connection 320 x 115







#### Compact ovens CM778GNB1B, CM776G1B1B, CM736G1B1B and CM724G1B1B









Compact oven CS736G1B1

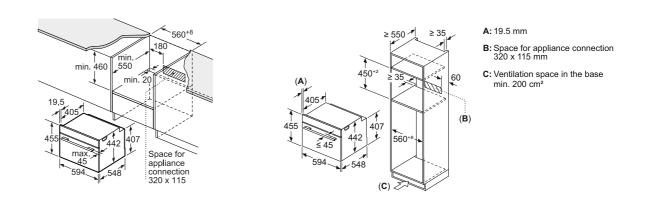

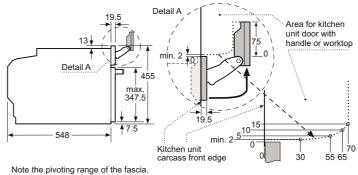


- A: 19.5 mm
- B: Space for appliance connection 320 x 115 mm
- C: Ventilation space in the base min. 200 cm<sup>2</sup>

Installation with a hob.





Installation with a hob.





### Oven technical diagrams

#### Compact microwave combination CM585AGS0B












#### Compact microwave oven CE732GXB1B

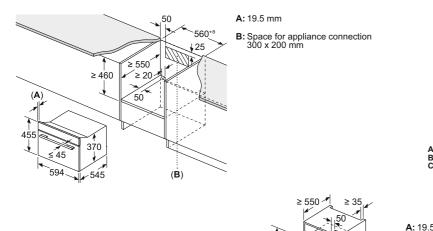







- B: Space for appliance connection 300 x 200 mm
- **C**: Ventilation space in the base  $\geq$


## Microwave oven technical diagrams

Microwave BF722L1B1B

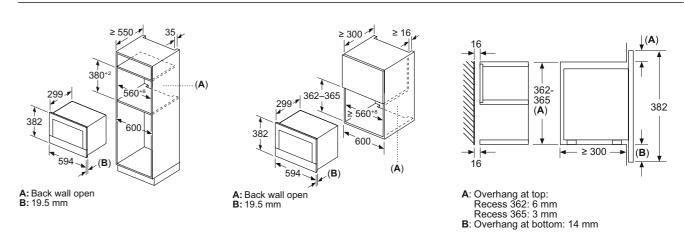


Microwave BF555LMS0B

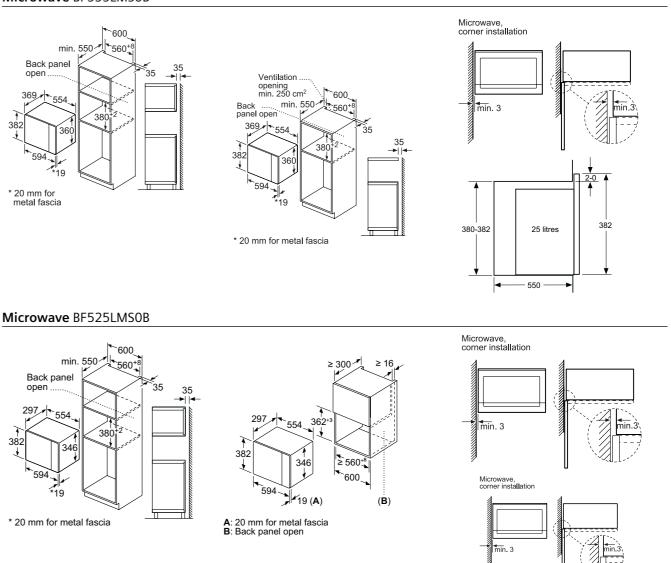


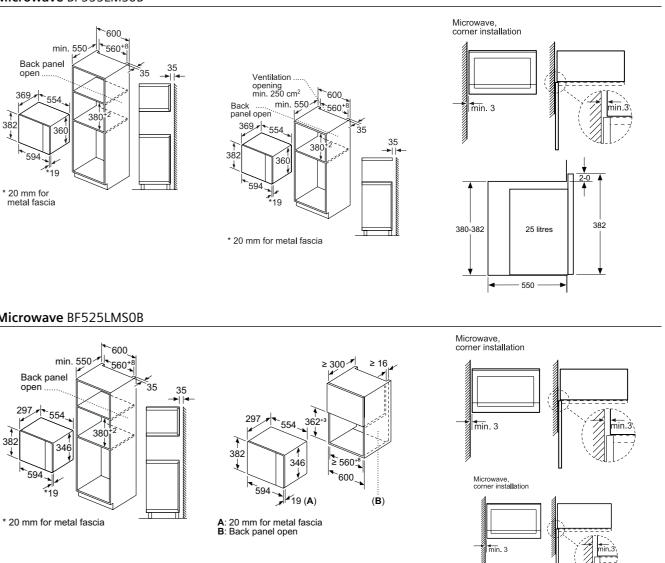

## Warming drawer technical diagrams


#### Warming drawer BI710D1B1B





### Coffee centre technical diagrams

Coffee centre CT718L1B0






Bean and water containers are removed from the front Recommended installation height 950–1450 mm


Bean and water containers are removed from the front Recommended installation height 950–1450 mm

Left corner installation

≥ 350

#### Warming drawers BI710C1B1B and BI710E1B1







A: 7.5 mm

Compact ovens with appliance height of 455 mm can be installed above the warming drawer without an intermediate floor

#### Warming drawer BI510CNR0B








Compact ovens with an appliance height of 455 mm can be installed above a warming drawer. An intermediate floor is not required.

#### Measurements in mm. Line drawings are for reference only. Please download the latest installation guidelines from siemens-home.bsh-group.com/uk 64 Siemens cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

If using the 92° hinge limiter, the min. distance to the wall is only 100 mm







# Induction, ceramic and gas hobs. Designed to impress

The Siemens hob range combines stunning design with innovative technology and ergonomic design.

The advanced technology available on the Siemens hobs ensures the cooking experience is as enjoyable as possible, while time-saving features help prepare dishes quickly and effortlessly. With a wide range of styles, sizes and cooking types to suit any needs and kitchen design.



Siemens hob warranties:



2 year warranty A two year warranty is available on all Siemens hobs listed in this brochure to protect against manufacturing and material faults during this warranty period.

> To find out more about warranty and for registration, please visit: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties

# Hobs cooking types at a glance

.....

With intelligent technology, elegant design aesthetic and practical yet impressive functionality, Siemens hobs bring excitement and ease when creating dishes.

#### Induction cooking



inductionAir Plus venting hobs The inductionAir Plus venting hobs provide the freedom to design the kitchen flexibly, with the added benefit of hassle-free cleaning. The innovative design means that the grease filters fit into an entirely detachable liquid tray unit which is designed to completely protect against spillages and over-boiled liquids.

Model shown: ED851HQ26E (page 88)

68



#### flexInduction hobs

Siemens flexInduction hobs are a must for diverse cooking. The cooking area can be tailored to the user's cooking needs: from using as a traditional induction hob with four or five separate zones – for boiling rice, for example - to linking the zones together to form one zone for larger cooking pans.

With flexInduction Plus, the hob automatically knows how large the cookware is. This provides even heat with the use of an additional central zone if the hob detects that the pan is too large.

Model shown: EX975KXW1E (page 94)



#### Induction hobs

Induction cooking is recognised as being one of the quickest, safest and most efficient methods of cooking available. When a pan with a ferrous or magnetic metal base is placed on the hob, the coil situated below the ceramic surface uses an electromagnetic field to create heat, almost instantly heating the pan. With only the base of the pan heated the cooking zone stays cooler.

Model shown: ED851HWB1E (page 97)

#### Ceramic cooking





#### quickLite hobs

The surface of a glass ceramic hob heats up quickly and conveniently, while also being easy to clean due to the smooth and even surface. The cooking zones glow red when they are on and the temperature can be adjusted precisely, with up to 17 power levels. Siemens highSpeed cooking zones are also optimised for fast cooking and heat up almost instantly.

Model shown: ET81RBHA1D (page 102)

#### Gas cooking



#### Gas hobs Tradition meets innovation - with their modern functions, Siemens gas hobs provide enjoyment in cooking like a pro. Low profile, single piece burners on the glass complete the sleek appearance.

Model shown: ER9A6SB70 (page 106)





#### Domino cooking



#### Domino hobs

Domino hobs can be be installed alone or side by side with other types of compatible hobs. Domino cooking gives you more cooking options, for example the 40cm wide Teppan Yaki is ideal for combining with other Domino or faceted design cooktops to create a bespoke cooking area.

Models shown: EX375FXB1E, ER3A6AB70, and ER3A6BB70 (pages 110-111)

# The perfect hob for any kitchen design

#### A perfect finish suitable for any modern kitchen.

Siemens aim to provide a wide selection of quality hob choices to ensure there is enough variety and colour-ways to choose from to match any kitchen style.



Black glass



Black tempered glass



Black ceramic glass



Perfectly framed.

### Stainless steel

Siemens offers a variety of finishes to the hob frame to allow the user to create a specific look or even match the hob to other Siemens products; from stand out premium steel trims to sleek flushline trims that fit neatly in line with the worktop surface.



Premium steel trim



Front bevel







Frameless



Flush fit








#### The perfect width.



Our hob range is available in a range of widths to suit specific kitchen design and needs. Our choice of induction hobs come in 60, 80 and 90cm options, gas is available in 60, 75 and 90cm options and venting hobs come in 60, 70 and 80cm options.

#### Fingers on the pulse of innovation.






touchDisplay allows the user to get the most out



Dual lightSlider

of the Siemens induction hob. The full colour touch screen is intuitive and easy to use with clear information about the hob's status at all times as well as additional settings that open up new possibilities. The settings for each individual cooking zones can be selected intuitively for easy control. The zones can even be combined when needed for added flexibility - for example, for different sizes of cookware and various accessories. The display screen gives access to a new world of recipes which can help cook the perfect dish in just a few simple steps, complete with images



and clear text.



#### The ergonomic touchSlider sits flush to the appliance, the power level scale can be adjusted to the desired setting at the slide of a finger, with control advances in half-levels from 1 to 9. Alternatively, the desired level can be selected directly for faster adjustments to the cooking zone temperature.

touchControl easier.

easier.

•

<u></u>

D

touchControl



70



#### Dual lightSlider

The dual lightSlider offers easy operation and selection of the cooking zones of the iO700 induction hobs via one neatly arranged interface that illuminates when the hob is turned on. The power level of the cooking zones can be simply adjusted by sliding a finger along the lit scale or selecting the desired power level directly with precise control. When the hob is switched off, the controls are completely invisible for a sleek finish to the kitchen. As there are no protruding parts, cleaning is made even





#### TFT Control

The TFT Control makes the access and operation of the hob functions easy and ensures good readability from any perspective.



Thanks to advanced touchControl technology, Siemens hobs can be operated by simply touching the surface. This means the controls are seamlessly integrated into the surface and make cleaning even



#### frontControl dials



#### frontControl

Gas hobs with frontControl feature all controls at the front of the appliance for ease of use.

### Induction key features

Home Connect Hobs. Designed to make life easier.

The Home Connect app offers more by connecting together the Siemens intelligent kitchen and unlocking additional features and functions. It is also possible to use the services of different partners - turning the house into a connected home.

The Home Connect app can be used to turn the hob on, or change the cooking power level, while IFTTT can connect our connected hobs to a wider variety of partners including home lighting and music systems.

O amazon alexa

Home Connect

The status of our appliances can be checked from anywhere using the Home Connect app on a smartphone. No more leaving the house and having to go back and to check if the hob was turned off. Peace of mind is just a click away with Siemens smart hobs and the intuitive Home Connect app. Appliance settings, including on/off status, active cooking zones, child lock implementation and cooking time status can be monitored from anywhere.

A wide range of recipes are available via the app and the cooking and temperature settings can be sent directly from there straight to the hob, perfect for busy evenings. Additional seasonal recipes and extra cooking support can also be found through the App.



#### cookConnect system

Many functions of the extractor hood can be automated using the Home Connect app. Once the cookConnect system has been set up, the hood will automatically adjust its extraction level depending on the power level of the hob. The hoods lighting can also be adjusted directly from the hob. Get more with Home Connect.

For more information see pages 128 and 129.

Discover more exciting possibilities for a seamless life with Siemens and Home Connect. For more information visit siemens-home.bsh-group.com/uk/homeconnect



### Discover the powerful responsiveness of Siemens induction cooking.



powerInduction Instantly hot. Instantly cooler. With Siemens powerInduction the heat is conducted directly to the pans and their contents via induction coils, without heating the hob. Heat-up times are short, safety is increased and the hob is much easier to clean.



### powerMove

Enables intuitive control by splitting the hob into various zones with different set temperatures (low to high). Depending on the hob it has 2, 3 or 5 different zones.



#### fryingSensor Plus

Makes frying easier by automatically maintaining the ideal temperature to ensure the food is cooked just right. Once the preferred programme is selected depending on the type of food to be cooked, a signal will notify when to add oil to the pan and add the food – fryingSensor Plus then takes control. The sensor delivers full precision when frying by keeping the dish at the defined temperature level as soon as this has been reached.



Please note: these features are on selected models. For information on model specification, please check pages 87-89.



#### cookingSensor Plus

Once attached to the pot, the cookingSensor Plus interacts with the cooktop, giving a signal when a certain temperature has been reached and keeping it exactly at that level to prevent overboiling.



#### powerBoost

Increases power by up to 50%. This can save up to 35% of the time it takes to heat up pots or cook large quantities depending on the chosen dish.



#### panBoost

This feature heats cookware faster than when using heat setting 9. After 30 seconds, this function automatically switches itself off and reverts back to power level 9.



#### Combi-Zone

When using larger pots and pans, the Combi-Zone connects two induction zones together to ensure better heat coverage.





# Explore the science of induction Air Plus cooking

The Siemens inductionAir Plus system combines cutting-edge induction technology, such as combi zones and powerMove Plus, with sleek, integrated ventilation. Favoured in open plan and compact kitchens, inductionAir Plus hobs give a sense of free-flowing space and light for a more social experience within the kitchen.

#### inductionAir Plus hob

The inductionAir Plus hob gives more design flexibility when planning a kitchen, with the added benefit of hassle-free cleaning. The innovative design means that the grease filters fit into an entirely detachable liquid tray unit which is made to completely protect against spillages and over-boiled liquids.

#### How does it work?

All parts of the inductionAir Plus hob are neatly arranged in a liquid tray unit, accessed from the top of the hob. Each part is dishwasher-proof, including the black glass air inlet grid, the 2-in-1 grease filter and the liquid tray. Each part is also separate to save space in the dishwasher.

#### Protects from spills

As a first layer of protection, the black glass air inlet grid is designed to limit the flow of liquids into the ventilation module. As a second layer of protection, the liquid tray captures up to 200ml from day-to-day cooking and can be easily discarded. In addition, up to 700ml of additional liquid can be held in the liquid safety tank accessed from beneath the appliance, and safe-guarding it from damage.





ED851HQ15E

nductionAir Plus hob

# Our best induction hob, evolved: inductionAir Plus



#### The perfect fit.

#### Size flexibility

The inductionAir Plus hob comes in 3 variants of size: 60cm, 70cm and 80cm. This means that, whatever space is available, there is an inductionAir Plus hob that will fit in perfectly.

#### Installation options

There are 4 different ways to install the inductionAir Plus hob, giving you plenty of options as to how and where to install it.

See page 112 for an outline of installation options and accessory requirements.



Scan to view installation options

# Venting hobs installation options

Depending on your chosen extraction route we have created a selection of ducting kits to simplify the installation process.

Select your chosen extraction mode from the options below.

Select your chosen ex		ne o		
~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	Un-ducted Recirculation	0	No additional accessories required	
			(Slider adaptor and odour filters included with the hob)	
	Ducted Recirculation		Min. 70cm deep Work surface Starter Kit 1 HZ9VDKR0 * 2 × Large radius bends HZ9VDSB2 3 × connectors HZ9VDSS1 1 × 50cm straight channel HZ9VDSM1 1 × diffusor HZ9VRPD1 Or Min. 60cm deep Work surface Starter Kit 2 HZ9VDKR1 * 1 × Small radius bend HZ9VDSB4 1 × Large radius bend HZ9VDSB4 1 × Large radius bend HZ9VDSB2 3 × connectors HZ9VDSS1 1 × 50cm straight channel HZ9VDSM1	Please note that depending on the length of the duction route additional components may be required. You can find the list of optional ducting components available on the following page.
	Ducted Extraction	0	1 x diffusor HZ9VRPD1 Min. 60cm deep Work surface	
<b>Note:</b> when installing using worktop depth of less than 70cm, reduced depth drawers may be necessary.			Starter Kit 3 <b>HZ9VDKE1**</b> 1 x Small radius bend HZ9VDSB4 1 x connector HZ9VDSS1 1 x 50cm straight channel HZ9VDSM1 1 x set of 4 acoustic filters	<ul> <li>* ! To fully duct to the plinth additional straight channel and a connector are required in addition to the kit!</li> <li>** Additional individual ducting components are required to complete installation with starter kit (Installation specific).</li> </ul>

	dditional individual o	
	HZ9VDSM1	500mm long flat channel ducting section – outlet size 222mm x 89mm
	HZ9VDSM2	1000mm long flat channel ducting section – outlet size 222mm x 89mm
	HZ9VDSB1	Flat channel 90° horizontal bend, for worktop depth minimum 65cm – outlet size: 222mm x 89mm
	HZ9VDSB2	Flat channel 90° vertical bend (large Radius), for worktop depth minimum 70cm – outlet size 222mm x 89mm
	HZ9VDSB3	Flat channel 90° vertical bend (medium Radius), for worktop depth minimum 65cm – outlet size: 222mm x 89mm
	HZ9VDSB4	Flat channel 90° vertical bend (short Radius), for worktop depth minimum 60cm – outlet size 222mm x 89mm
	HZ9VDSS1	Connection piece for use between straight channel ducting components and bends – outlet size: 222mm x 89mm
	HZ9VDSS2	Flexible Connection piece for use between straight channel ducting components and bends outlet size: 222mm x 89mm
	HZ9VDSI0	Straight Adaptor / Converter flat to round (Ø 150mm) – outlet size: 222mm x 89mm
9	HZ9VDSI1	90° Adaptor / Converter flat to round (Ø 150mm) – outlet size: 222mm x 89mm
11	HZ9VRPD1	Diffusor for ducted recirculation – outlet size: 222mm x 89mm
	HZ9VRCR1	1 x set of cleanAir Plus recirculation filters

#### Additional planning notes for vented hob installation

Ducted recirculation using starter kit HZ9VDKR0 for min. 70cm worktop depth

• Install the filters into the hob (included with venting hob)

• Use the adhesive to seal the first

bend into the back of the hob

included with venting hob


(C)


(D)

(D) (C)

(D)

Ducted recirculation using starter kit HZ9VDKR1 for min. 60cm worktop depth






• Install the filters into the hob (included with venting hob)


- Use the adhesive to seal the first bend into the back of the hob
- Discard the telescopic slider piece

• Discard the telescopic slider piece included with venting hob

76

Ducted exhaust extraction using -Starter kit HZ9VDKE1 for min. 60cm worktop depth





# New touchSlider induction hobs. Precision without trying

Our new range of touchSlider induction hobs and angled hoods work tirelessly in the background to remove distractions, eliminate errors and enhance the cooking experience.

Designed for maximum flexibility and control and true to the distinctive Siemens design - our intelligent hobs and hoods make cooking more intuitive, automatically adjusting to the cookware, personalising to the user preferences and automating tasks.

#### Pure intelligence. Full flexibility.

Siemens' new induction hobs are a natural fit for modern kitchens with their beautiful design with high-quality materials and intuitive touchSlider controls. The range includes a variety of widths - from 60cm to 90cm - with unique design perspectives in every model class. There is a hob to fit each individual style and personal requirements and elevate the kitchen design. The stylish new touchSlider control allows adjustment in increments of half a level at the slide of a finger across the surface.

Designed to simplify the process and prevent errors, the intelligent sensors, flexible induction zones and customisable features make cooking more intuitive, taking the stress out of meal preparation.



Featuring all standard features from the Siemens induction range they include additional features like:



#### intelligent hood automatic

The hood matches the fan level to the temperature and power of the hob, allowing to cook from start to finish without ever touching the hood by simply pairing both appliances with the Home Connect app. Intelligent hood automatic is available on all new touchSlider induction hobs in combination with our new iQ300, iQ700 inclined hoods.



#### fryingSensor Pro

fryingSensor Pro prevents overheating thanks to the intelligent sensors that keep the heat in the pan at a constant temperature while cooking to prevent overheating. Just select the best temperature for the dish from the 11 options available.



#### **Favourite button**

The favourite button personalises the cooking experience, with just one tap. When connected to the Home Connect app, the favourite button can be programmed to perform a chosen action. Whether it is activating a specific heat and timer setting, switching on hood lighting, or turning on other connected appliances and devices using IFTTT.





Ľ reddot winner 2023

nload and install e Connect App Home Connect

#### Our hobs are official Red Dot design and innovation award winners.

The Jury said, "This induction hob offers a combination of interface and interaction that is impressive in its logic. Cooking becomes an experience thanks to the constant response of an intelligent surface".

#### Have it your way with Home Connect.

Intelligent connectivity gives more control, support and freedom. Whether it is getting a notification on a smartwatch when dinner is ready, lowering the heat on the hob via a smartphone or tablet, or asking the smart assistant speaker (Amazon Alexa or Google Assistant) to turn off the hob while the table is being set, Home Connect gives more flexibility and more ways to personalise the kitchen.

Some of the features displayed can be accessed only if the device is connected to a Home Connect Account and a SingleKey ID account via the Internet. Home Connect is a service of Home Connect GmbH. For more information on Home Connect, visit www.home-connect.com/gb/en


# flexInduction and induction hobs



### flexInduction, no-compromise cooking at its best.



Siemens flexInduction hobs are a must for diverse cooking. The cooking area can be tailored to individual needs, so it can either be used as a traditional induction hob with separate zones, or by linking the zones together for larger cooking pans. The extended cooking surface can accommodate multiple pans of any size, placed anywhere on the surface at the same time. flexInduction also includes boost settings, automatic pan recognition and touchSlider controls.

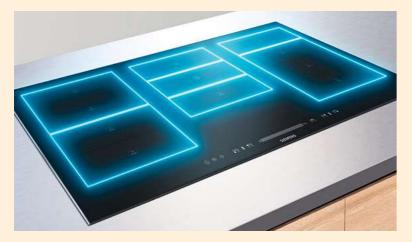

Each flexInduction zone houses four innovative elongated inductors beneath the glass, which act independently to detect the presence of cookware on the hob. The individual inductors only work when cookware is detected, whether that is a 10cm milk pan placed in one corner, or a large griddle plate covering the whole zone. With only specific areas active at any particular time, no energy is wasted. And for an even more versatile cooking, the newly designed triple flexInduction hob provides the ultimate in flexible cooking with three flexInduction zones. flexInduction is no-compromise cooking at its best.





With flexInduction Plus, the cooking zones automatically adapt to the sizes of pots and pans of up to 30cm in diameter. If one cooking zone is not sufficient, additional inductors are automatically activated to ensure the heat is evenly applied at all times. flexInduction Plus offers additional flex zones for even larger pans. In 90cm variants an additional flex zone is possible with additional inductors below the hob surface situated in the centre of the hob. For 80cm flexInduction Plus hobs, the left and right zones can be extended further to allow for a larger cooking space. For 60cm flexInduction Plus hobs, no matter which side of the pan goes over, a central zone is automatically added.



nduction

#### Induction cooking

Induction cooking is recognised as being one of the quickest, safest and most efficient methods of cooking available.

When a pan with a ferrous or magnetic metal base is placed on the hob, the coil situated below the ceramic surface uses an electromagnetic field to create heat, almost instantly heating the pan. With only the base of the pan heated the cooking zone stays cooler.

Easier to clean and safer to use, because the ceramic cooking surface is warmed only by the heat transferred back from the cookware and its contents, spillages are less likely to burn on, and there is normally no need to wait for the glass to cool down before simply wiping it over with a cloth, there is some residual heat from the cooking process but there is a reduced risk of burning on high temperatures from the hob surface. And if the induction hob is turned on without a pot or pan being placed on it, the hob itself will not heat up which reduces the risk of getting burnt.



#### flexInduction and induction | Hobs




#### Black glass finish

Our stunning induction hobs feature a black glass finish and bold displays. Our stylish collection mimicks the aesthetics of our built-in ovens and microwaves so our kitchen appliances can truly complement one another.

## Gas hobs key features

### High performance, high speed.


Tradition meets innovation – with their modern functions, Siemens gas hobs provide enjoyment in cooking like a pro. Our top-of-the-range models feature beautiful and durable black ceramic glass hob bases, with cast iron pan supports for a contemporary look. They are designed to coordinate with other appliances in the iQ700 range, and can be combined seamlessly with iQ700 domino and electric hobs. Low profile, single piece burners on the glass complete the sleek appearance.

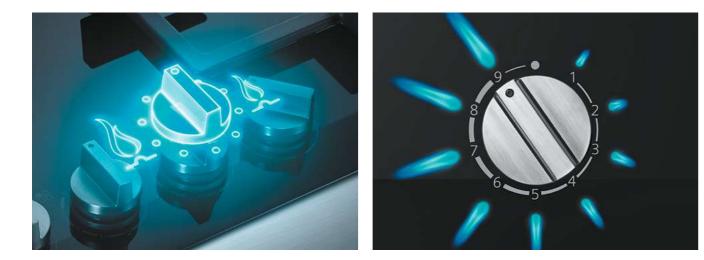



#### stepFlame technology

Introducing the ground-breaking innovation in gas hobs: stepFlame. Offering 9 precise power levels to provide the same level of control than with an electric hob, but with gas - removing all guesswork. Whatever the level selected, the exact heat and the flame size needed is provided to achieve the precise results. It is just as easy to operate as it sounds, so conjuring up delicious meals is now easier than ever.

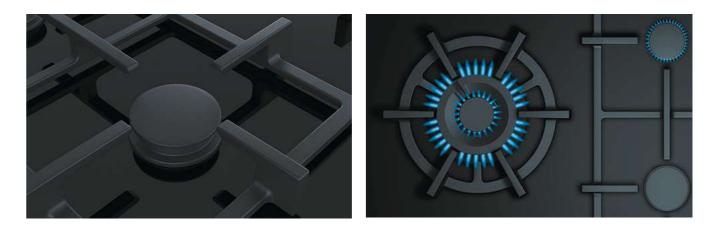




#### Cast Iron

Cast iron pan supports are designed to withstand even the heaviest of pots and pans and provide a sleek finish to each hob. All can be removed for easier cleaning and iQ700 models have dishwasher safe pan supports.



**Power Level Display with residual heat indicator** Together with the new stepFlame technology, selected gas hobs feature an LED display which clearly shows the selected power level at a glance. For added safety, the LED display also shows whether there is any residual heat from the hob indicated by a capital 'H' for hot and a lower case 'h' for warm.







#### Wok burner

Siemens gas hobs feature wok burners that deliver 3.3kW, 4.0kW, 4.2kW, 5.0kW or 6.0kW of power depending on the model, meeting the increasing demand for high speed cooking. But it is not just about power; they can be turned down to just 0.3kW – perfect for simmering. For the ultimate in flexibility, our 6.0kW and 5.0kW burners are dual control – the inner and outer flame rings can be adjusted independently via a single control.



#### Dishwasher proof

All gas on ceramic glass models feature pan supports that are treated with a special coating which resists discolouration and the damaging effects of a dishwasher.

## Hob accessories

For additional cooking flexibility Siemens provide a range of accessories for our flexInduction, gas and domino hobs.

flexInduction hob Accessories

#### Pan sets

This new range of induction pans are designed to work perfectly with induction and flexInduction hobs. The rectangular shape fits perfectly to the induction zones and the pans are all oven-proof up to 220°C with a non-stick coating so that food cooks perfectly while also being easy to clean. They are also easy to stack to maximise storage space.





HZ9FF040

(Consists of 1 x Flex Pan large, 1 x Flex Pan medium and 2 x Flex Pan small with lids)

(Consists of 1 x Flex Pan large, 1 x Flex Pan medium and 1 x Flex Pan small with lid)



#### Griddle pan

Converts our induction cooktop into a grill, specially designed for use across four flexInductors. The griddle pan maintains an even heat, perfect for frying steak or for roasting meat, fish and vegetables.



Griddle pan HZ390522



Teppan Yaki Heating extremely guickly the Teppan Yaki is great for fast Japanese cooking. Perfect for a cooked breakfast or a healthy stir-fry, the pan will fit across either three or four flexInductors.

HZ390512





**Roasting dish** Perfect for use with flexInduction hobs this multipurpose dish is a must when cooking for a crowd.





#### Gas Accessories



#### Wok ring Cooking oriental meals in a wok, requires a high temperature. This wok ring helps to regulate heat and concentrate the open flame to one area.



Cross support Perfect for supporting smaller pots and pans on the hob. Whether using an espresso pot, or small saucepan, the cross support provides maximum stability.

For more details on the range of accessories available please visit siemens-home.bsh-group.com/uk/shop



#### Domino Hob Accessories





CookingSensor Plus Wireless temperature sensor HZ39050


Cast iron non-stick frying pan **HZ9FE280** 



#### Six piece pan set HZ9SE060

OPTIONAL ACCESSORIES FOR DOMINO HOBS	
CookingSensor Plus Wireless temperature sensor for cookingSensor Plus ready models	HZ39050
Connecting strip for use with side trim hobs	HZ394301
Flex Pan Set 4 pcs. Perfect universal pans for the FlexZone. Consists of 1 x Flex Pan large, 1 x Flex Pan medium and 2 x Flex Pan small with lids	HZ9FF040
Flex Pan Set 3 pcs. Perfect universal pans for the FlexZone. Consists of 1 x Flex Pan large, 1 x Flex Pan medium and 1 x Flex Pan small with lid	HZ9FF030
Flex Pan large approx. 35 x 22cm. Perfect universal pan for the FlexZone	HZ9FF010
Teppan Yaki approx. 34 x 20cm. Perfect for the FlexZone	HZ9TY010
Four piece pan set, suited for induction, radiant ceramic and gas. Consists of 1 x sauté pan, 2 x pots with lids and 1 x milk pan	HZ9SE040
Six piece pan set, suited for induction, radiant ceramic and gas. Consists of 2 x sauté pan, 3 x pots with lids and 1 x milk pan	HZ9SE060
Cast iron non-stick frying pan, suited for induction, base diameter 185mm	HZ9FE280
BergHOFF three piece induction pan set	HZ9SE030
Griddle plate, approx. 40x20 cm for use with flexInduction	HZ390522
Teppan Yaki, approx. 40x20 cm for use with flexInduction	HZ390512
Oval roasting dish with lid for use with induction hobs	HZ390011

### inductionAir Plus hobs product overview

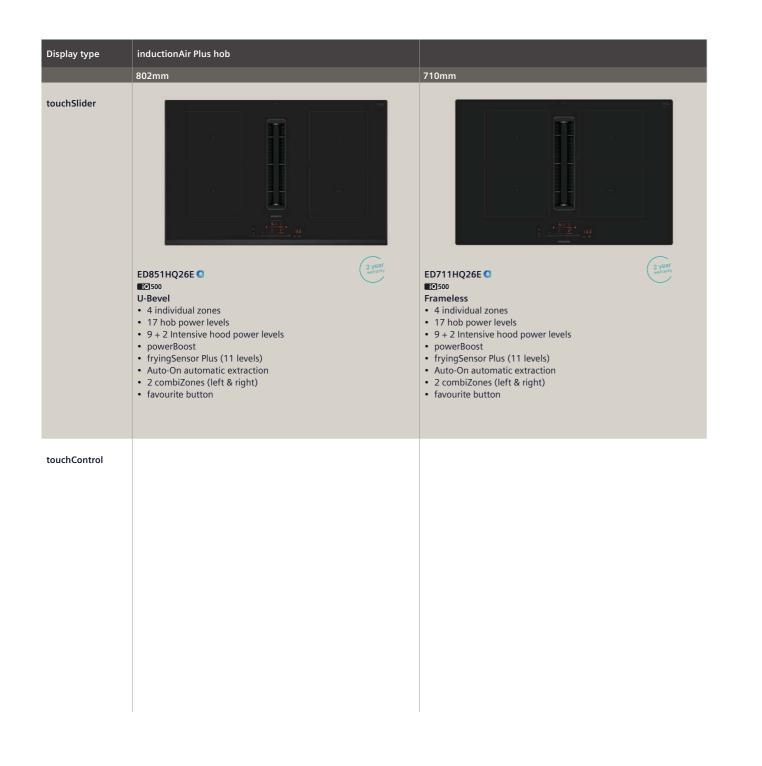

-

#### ED811BS16E

#### iQ 300 Frameless

- 4 individual zones
- 17 hob power levels
- 3 + 1 Intensive hood power levels
- powerBoost
- Auto-On automatic extraction
- 1 combiZone



#### 2 year warranty

A two year warranty is available on all Siemens hobs listed in this brochure to protect against manufacturing and material faults during this warranty period.

inductionAir Plus hob

592mm



#### ED611BS16E iQ 300

#### Frameless


- 4 individual zones
- 17 hob power levels
- 3 + 1 Intensive hood power levels
- powerBoost
- Auto-On automatic extraction
- 1 combiZone

### inductionAir Plus hobs

#### ED851HQ26E

inductionAir Plus hob Black glass





inductionAir Plus hob		
specifications	-	
APPLIANCE TYPE	_	IAIR PLUS HOE
Design family		Q 500
Model number DESIGN	ED85	1HQ26E
Width (mm)		802
Control position / Control type	Front / t	touchSlider
Style	U-	bevel
KEY FEATURES	_	_
Home Connect Integrated extractor		
cookingSensor Plus ready <sup>1</sup>		-
fryingSensor Plus settings for hob	11	levels
Favourite Button		
Automatic extraction	AL	ito-on
Number of flexInduction zones Number of combiZones	2.1.4	-
HOB FEATURES	2: Lei	t & Right
Number of individual zones / Power levels	4	
powerBoost / powerMove Plus		1-
panBoost	via HC/Favourite	e Button a. sw
Adaptable volume / Energy consumption display		1-
Keep warm function quickStart / Quick stop (Quick switch-off)	via HC/Favourite	e Button a. sw
flexMotion / reStart		-1
Demo mode		-
Dish categories/setting recommendations	via HC ap	op a. sw upd.
Wipe protection function (Control panel pause)		
SAFETY FEATURES		
Residual heat indicator / Pan recognition Childproof lock / Favourite button		
Countdown timer / Count up timer		1-
Safety time switch off / Main on/off switch		1
HOOD FEATURES		
climateControl sensor / Metal grease filter		- / 🗖
Power levels		Intensive
Automatic intensive revert setting Automatic or manual control	<u>ь п</u>	ninutes
Automatic of manual control	12/3	0 minutes
Interval operation		
Dishwasher safe grease filter cassette with spillage collection	Yes - 200	Oml capacity
Dishwasher safe spillage overflow collector		l capacity
Electronic grease filter/cleanAir filter saturation indicators		
PERFORMANCE / TECHNICAL INFORMATION – HOB Maximum power output (W)	7	,400
Nominal voltage (V)		0-240
Electrical cable length (cm)		110
Rear left zone - power (kW) / dimensions (mm)	2.50	190 x 21
Rear right zone - power (kW) / dimensions (mm)	2.50	190 x 21
Front left zone - power (kW) / dimensions (mm)	2.50	190 x 21
Front right zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm)	2.50	190 x 21
flexInduction zone right - power (kW) / dimensions (mm)		
combiZone left - power (kW) / dimensions (mm)	3.60	380 x 21
combiZone right - power (kW) / dimensions (mm)	3.60	380 x 21
Rear left zone / Rear right zone - with powerBoost (max. kW)		0/3.70
Front left zone / Front right zone - with powerBoost (max. kW)	3.70	0/3.70
PERFORMANCE / TECHNICAL INFORMATION – EXTRACTOR Extractor energy efficiency rating		
Extraction rate in m <sup>3</sup> /h <sup>(1,2)</sup>		
- ducted / recirculating power level minimum	154	4/117
- ducted / recirculating power level maximum	500 / 487	
- ducted / recirculating power level intensive	62	2 / 595
Noise level (sound power) based on dB[A] re 1pW (1.4)		
– ducted / recirculating power level minimum		2/41
	69	9/68
- ducted / recirculating power level maximum     - ducted / recirculating power level intensive		4/72

Yes, model has this feature. – Feature not available for this mode All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

Max 3 sensors at any time; one WSP provided. <sup>2</sup>Air flow and noise declarations made in line with CECED Code Of Conduct. <sup>3</sup>Sound power measured according to EN60704–3 on largest pipe diameter. Data valid in this table as of April 2024. Subject to modification without prior notice.

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

80cm



Home Connect



#### inductionAir Plus hob specifications APPLIANCE TYPE Design family iQ 500 Model numbe ED711H026 DESIGN Width (mm) 710 Control position / Control type Front / touchSlide Frameless KEY FEATURES Home Connect Integrated extractor cookingSensor Plus ready fryingSensor Plus settings for hob 11 levels Favourite Button Automatic extraction Auto-on Number of flexInduction zones Number of combiZones 2: Left & Right HOB FEATURES Number of individual zones / Power levels 4/17 powerBoost / powerMove Plus / – panBoost via HC/Favourite Button a. sw upd. Adaptable volume / Energy consumption display **I**/-Keep warm function via HC/Favourite Button a. sw upd guickStart / Ouick stop (Ouick switch-off) / – flexMotion / reStart -/ Demo mode Dish categories/setting recommendations via HC app a. sw upd. Wipe protection function (Control panel pause) SAFETY FEATURES Residual heat indicator / Pan recognition / Childproof lock / Favourite button / Countdown timer / Count up timer 1 – Safety time switch off / Main on/off switch 1 HOOD FEATURES climateControl sensor / Metal grease filter -/ Power levels 9 + 2 intensive sive revert setting Automatic inten 6 minutes Automatic or manual control Automatic after running: Extraction / Recirculation 12 / 30 minutes Interval operation Dishwasher safe grease filter cassette with spillage collection Yes - 200ml capacity Dishwasher safe spillage overflow collector 700ml capacity Electronic grease filter/cleanAir filter saturation indicator PERFORMANCE / TECHNICAL INFORMATION - HOB Maximum power output (W) 7,400 Nominal voltage (V) 220-240 Electrical cable length (cm) 110 Rear left zone - power (kW) / dimensions (mm) 2.50 190 x 21 Rear right zone - power (kW) / dimensions (mm) 2.50 190 x 21 Front left zone - power (kW) / dimensions (mm) 2.50 190 x 21 Front right zone - power (kW) / dimensions (mm) 2.50 190 x 21 flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) 3.60 380 x 21 combiZone right - power (kW) / dimensions (mm) 3.60 380 x 21 Rear left zone / Rear right zone - with powerBoost (max. kW) 3.70/3.70 Front left zone / Front right zone - with powerBoost (max. kW) 3.70/3.70 PERFORMANCE / TECHNICAL INFORMATION – EXTRACTOR Extractor energy efficiency rating В Extraction rate in m<sup>3</sup>/h <sup>(1,2)</sup> - ducted / recirculating power level minimum 154/117 - ducted / recirculating power level maximum 500/487 - ducted / recirculating power level intensive 622/595 Noise level (sound power) based on dB[A] re 1 - ducted / recirculating power level minimum 42/41 - ducted / recirculating power level maximum 69/68 - ducted / recirculating power level intensive 74/72 Motor power (W) 170 Yes, model has this feature. – Feature not available for this model

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.


<sup>1</sup>Max 3 sensors at any time; one WSP provided. <sup>2</sup> Air flow and noise declarations made in line with CECED Code Of Conduct. <sup>3</sup>Sound power measured according to EN60704–3 on largest pipe diameter.

Data valid in this table as of April 2024. Subject to modification without prior notice.

#### inductionAir Plus hobs | Hobs

	2 y	year menty	2.ye	ar Inty	
		IR PLUS HOBS			
		1300 18516E	ED611E		
	ED81	IBSTOE	EDGITE	ISTOE	
	8	02	59	2	
		uchControl	Front / toud		
	Fran	ieless	Frame	liess	
		-	-		
		<b>-</b>			
		-	-		
		-	-		
		o-On _	Auto-	On	
		1	- 1		
		17 /-	4/1		
d.		-	-		
		1-	- 1		
d.					
	-	/ ■	-1		
		-	-		
		-			
	_			_	
		/ <b>—</b> / –			
		1-	■ /	-	
		1	. /		
	-	/	-/		
		ntensive	3 + 1 int		
		nutes	6 min		
		minutes	12 / 30 n		
		nl capacity capacity	Yes - 200m 700ml ci		
		1-	-1		
	7.	400	7,40		
		400 I-240	220-2		
	1	10	11	0	
10 10	2.20	190 x 210 180	2.20	190 x 210 145	
10	2.20	190 x 210	2.20	190 x 210	
10	2.20	210	2.20	210	
	-	-	-	-	
10	- 3.60	- 380 x 210	- 3.60	- 380 x 210	
10	-	-	-	-	
		/ 3.10	3.70/		
	3.70	/ 3.70	3.70/	3.70	
		В	В		
	330	/ 252	330 /	252	
		/ 441	500/		
	622	/ 595	622 /	595	
		/ 55	61 /	55	
		/ 66	69/		
	74	172	74 /	72	
	1	70	17	0	

### flexInduction hob product overview

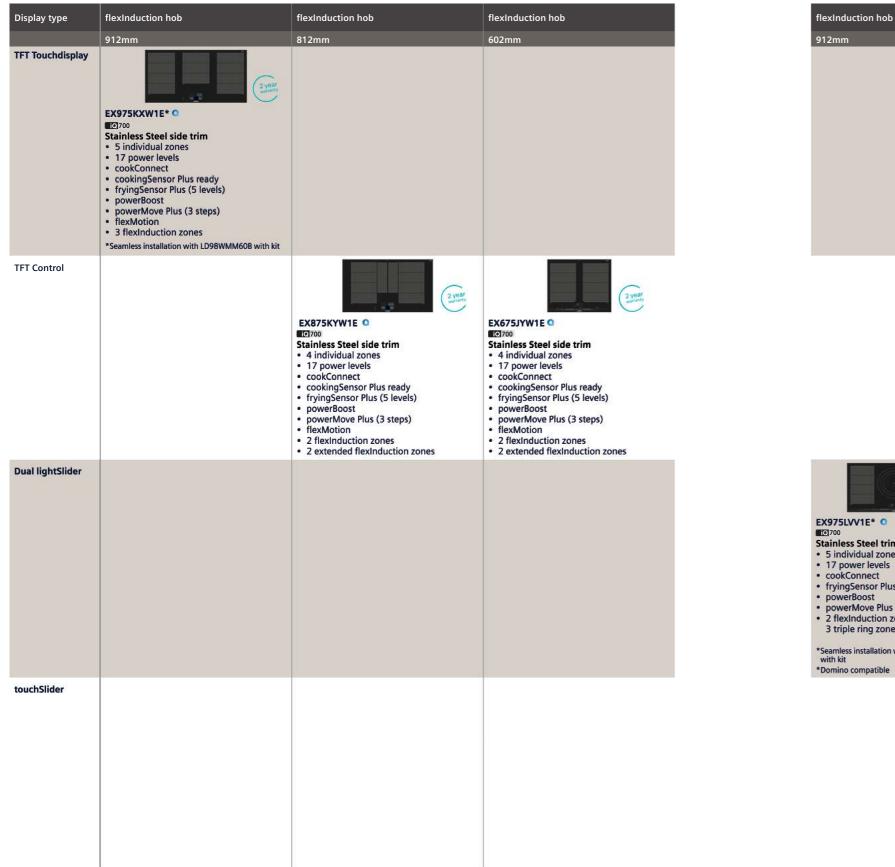

Home Connect

flexInduction hob



- 17 power levels
  cookConnect
- fryingSensor Plus (11 levels)
- powerBoost flexMotion
- Favourite button




#### 2 year warranty

A two year warranty is available on all Siemens hobs listed in this brochure to protect against manufacturing and material faults during this warranty period.

flexInduction hob	flexInduction hob
802mm	592mm
2.year	2year waranhy
EX851HVC1E Q E0700 802mm	EX651HEC1E O
U-Bevel 5 individual zones 17 power levels	U-Bevel • 4 individual zones • 17 power levels
<ul> <li>cookConnect</li> <li>fryingSensor Plus (11 levels)</li> <li>powerBoost</li> </ul>	<ul> <li>cookConnect</li> <li>fryingSensor Plus (11 levels)</li> <li>powerBoost</li> </ul>
flexMotion     flexInduction zone     Favourite button	<ul> <li>powerBoost</li> <li>flexMotion</li> <li>1 flexInduction zone</li> <li>Favourite button</li> </ul>

### Induction hob product overview

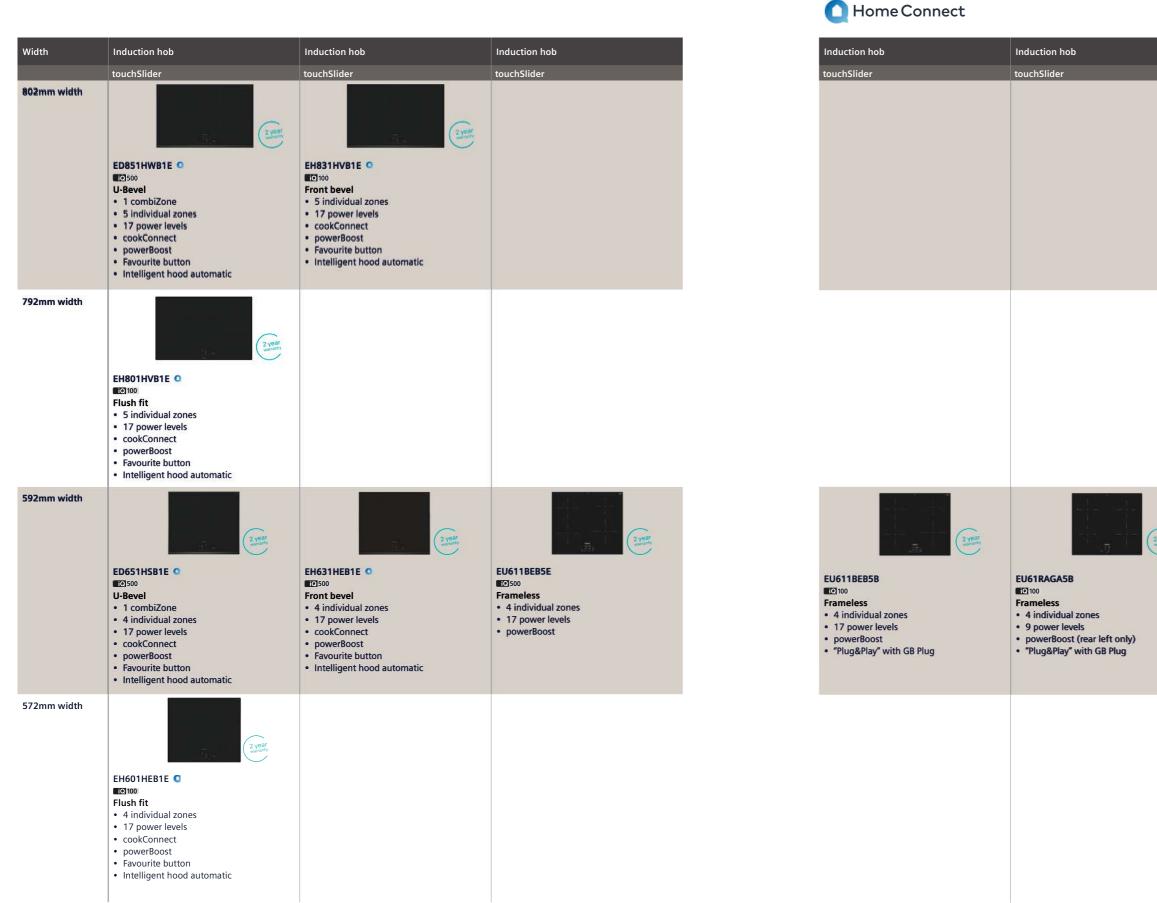



#### 2 year warranty

A two year warranty is available on all Siemens hobs listed in this brochure to protect against manufacturing and material faults during this warranty period.






powerBoost

### flexInduction hobs

### iQ 700 EX975KXW1E

flexInduction hob Black glass





flexInduction hob specifications		
1	EL EVIN DU	
APPLIANCE TYPE Design family	FLEXINDU	
Model number	EX975	
DESIGN	2,075	
Width (mm)	91	
Control position / Control type	Front / TFT t	ouch Display
Style	Stainless ste	eel side trim
Domino compatible	-	
KEY FEATURES		
Home Connect		
cookConnect		
cookingSensor Plus ready <sup>1</sup>	HZ39050	
fryingSensor Plus settings for hob Intelligent hood automatic	5 le	veis
Favourite button		
Number of freeInduction zones		
Extended flexInduction zone <sup>2</sup>		
Number of flexInduction zones		3
Number of combiZones		
activeLight	-	
HOB FEATURES		
Number of individual zones / Power levels	5/	
powerBoost / powerMove Plus	■/3	steps
panBoost		
Adaptable volume / Energy consumption display	- 1	
Keep warm function		
quickStart / Quick stop (Quick switch-off)		<i>I</i> –
flexMotion		
reStart Demo mode		
Dish categories/setting recommendations		
Wipe protection function (Control panel pause)		
"Plug&Play" with GB plug	-	
SAFETY FEATURES		
Residual heat indicator / Pan recognition		1_
Childproof lock / Safety time switch off		
Pause function	-	
Countdown timer (Timer with automatic switch off for each zone)		
Count up timer		
Main on/off switch		
PERFORMANCE / TECHNICAL INFORMATION	11	100
Maximum power output (W) Nominal voltage (V)	11, 220	
Electrical cable length (cm)		10
freeInduction zone - power (kW) / dimensions (mm)	-	
Rear left flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 240
Rear left zone - power (kW) / diameter (mm)	-	
Rear right flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 240
Rear right zone - power (kW) / diameter (mm)	-	
Rear centre zone - power (kW) / diameter (mm)	2.60	300 x 240
Front centre zone - power (kW) / diameter (mm)	-	
Front left flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 240
Front left zone - power (kW) / diameter (mm)	-	
Front right flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 240
Front right zone - power (kW) / diameter (mm)	-	
flexInduction zone left - power (kW) / dimensions (mm)	3.30	400 x 240
flexInduction zone right - power (kW) / dimensions (mm)	3.30	400 x 240
Extended flexInduction rear left - power (kW) / dimensions (mm)	-	
Extended flexInduction rear right - power (kW) / dimensions (mm)		
combiZone left - power (kW) / dimensions (mm) combiZone right - power (kW) / dimensions (mm)		
freeInduction zone right - powerBoost (max. kW)	3 70	3 70
freeInduction zone right - powerBoost (max. kW) Rear left zone / Rear right zone - with powerBoost (max. kW)	3.70	
freeInduction zone right - powerBoost (max. kW)	3.	3.70 70   3.70

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption. <sup>1</sup>Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed. <sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm model, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

Data valid in this table as of April 2024. Subject to modification without prior notice.

For the full range of accessories, please visit our online accessory shop on siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

90cm



Home Connect

	(2)	year <sub>Jarranty</sub>	(2)	vear <sub>varranty</sub>	2 v	year rranty	
	O Home Connect		🚺 Hon	ne Connect	O Home Connect		
flexInduction hob							
APPLIANCE TYPE			FLEXINDU	ICTION HOBS			
Design family	ic	700		700	iQ	700	
Model number	EX87	5KYW1E	EX67	'5JYW1E	EX975	SLVV1E	
DESIGN		312		(A)		12	
Width (mm) Control position / Control type		FT Control		602 IFT Control		l lightSlider	
ityle		teel side trim		teel side trim		rims with front bevel	
Domino compatible		-		-			
KEY FEATURES							
Home Connect				<u> </u>		•	
cookConnect cookingSensor Plus ready <sup>1</sup>		O required	LI7200	■ 50 required			
ryingSensor Plus settings for hob		o requirea evels		levels		- vels	
ntelligent hood automatic		-		-		-	
avourite button		-	-			_	
Number of freeInduction zones		-	-			_	
ixtended flexInduction zone <sup>2</sup>		2	2			-	
Number of flexInduction zones		2		2		ring zone	
activeLight		_		-	· · · · · · · · · · · · · · · · · · ·	_	
10B FEATURES							
lumber of individual zones / Power levels	4	/ 17	4	/ 17	5/	17	
owerBoost / powerMove Plus	■ /	3 steps	<b>I</b> 1	3 steps	I / 3 steps		
anBoost							
Adaptable volume / Energy consumption display		-/	-	- / 🔳	-/=		
(eep warm function uickStart / Quick stop (Quick switch-off)		■ /-			■ ■ / -		
lexMotion		<b>•</b>		_/- ■			
eStart				•			
Demo mode							
Dish categories/setting recommendations							
Nipe protection function (Control panel pause)							
Plug&Play" with GB plug SAFETY FEATURES		-		-	-	-	
Residual heat indicator / Pan recognition	-	/■	-	/	-	/	
Childproof lock / Safety time switch off		/■		· / ■		/ ■	
ause function		-		-	-		
Countdown timer (Timer with automatic switch off for each zone)							
Count up timer		-		-		-	
Aain on/off switch ERFORMANCE / TECHNICAL INFORMATION							
Maximum power output (W)	7.	400	7	,400	11.	100	
Iominal voltage (V)		0-240		0-240		-240	
lectrical cable length (cm)	1	10		110	1	10	
reeInduction zone - power (kW) / dimensions (mm)	-	-	-	-	-	-	
lear left flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 230	2.20	190 x 230	2.20	200 x 230	
lear left zone - power (kW) / diameter (mm)	- 2.20	 200 x 230	- 2.20	-	- 2.20		
tear right flexInduction zone - power (kW) / dimensions (mm) tear right zone - power (kW) / diameter (mm)	2.20	200 x 230	2.20	190 x 230	2.20	200 x 230	
lear centre zone - power (kW) / diameter (mm)	-	-	-	-	2.2, 2.6, 3.3	210, 260, 320	
ront centre zone - power (kW) / diameter (mm)	-	-	-	-	-	-	
ront left flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 230	2.20	190 x 230	2.20	200 x 230	
ront left zone - power (kW) / diameter (mm)	-	-	-	-	-	-	
ront right flexInduction zone - power (kW) / dimensions (mm) ront right zone - power (kW) / diameter (mm)	2.20	200 x 230	2.20	190 x 230	2.20	200 x 230	
exInduction zone left - power (kW) / diameter (mm)	3.30	- 400 x 230	3.30		3.30	- 400 x 230	
exinduction zone right - power (kW) / dimensions (mm)	3.30	400 x 230	3.30	380 x 230	3.30	400 x 230	
xtended flexInduction rear left - power (kW) / dimensions (mm)	3.30	300 x 300	3.30	300 x 300	-	-	
xtended flexInduction rear right - power (kW) / dimensions (mm)	3.30	300 x 300	3.30	300 x 300	-	-	
ombiZone left - power (kW) / dimensions (mm)	-	-	-	-	-	-	
ombiZone right - power (kW) / dimensions (mm)	-	-	-	-	-		
eeInduction zone right - powerBoost (max. kW) ear left zone / Rear right zone - with powerBoost (max. kW)	3 70		3 7(	 D/3.70		- / 3.70	
		-	5.7	-			
lear centre zone - with powerBoost (max. kW)					3.7		

Yes, model has this feature. – Feature not available for this model

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption. <sup>1</sup>Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed. <sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together. Data valid in this table as of April 2024. Subject to modification without prior notice.

		year arranty		2 year warranty		2 year Narranty	
flexInduction hob specifications	de de la compañía de						
APPLIANCE TYPE			FLEXINDU	CTION HOBS			
Design family	iQ		iQ 700		iQ 700		
Model number DESIGN	EX275	HXC1E	EX85	1HVC1E	EX65	1HEC1E	
Width (mm)	9.	12	8	02		592	
Control position / Control type	Front / to	uchSlider	Front / to	puchSlider	Front / t	ouchSlider	
Style	Stainless steel side t	rims with front bevel	U-I	bevel	U-	bevel	
Domino compatible	-	-		-		-	
KEY FEATURES	-	-		-		_	
lome Connect							
cookingSensor Plus ready <sup>1</sup>				-		-	
fryingSensor Plus settings for hob	11 le	evels	11	levels	11	levels	
ntelligent hood automatic	-	-		-		-	
Favourite button							
Number of freeInduction zones	<b>!</b>						
Extended flexInduction zone <sup>2</sup> Number of flexInduction zones		2		- 1		- 1	
Number of nexinduction zones Number of combiZones				-		-	
activeLight	-	_		-	-		
HOB FEATURES							
Number of individual zones / Power levels	4 /			5/17		4/17	
powerBoost / powerMove Plus	•				■ <i>I</i> –		
panBoost Adaptable volume / Energy consumption display	via HC/Favourite Button a. sw upd.		via HC/Favourite Button a. sw upd.		via HC/Favourite Button a. sw upd.		
Energy consumption display				-		-	
Keep warm function	via HC/Favourite	Button a. sw upd.	via HC/Favourite Button a. sw upd.		via HC/Favourite Button a. sw upd.		
quickStart / Quick stop (Quick switch-off)		I –	■ <i>1</i> –		<b>I</b> / -		
flexMotion					•		
reStart	I						
Demo mode	Nia 116 and		Via HC app a. sw upd.				
Dish categories/setting recommendations Wipe protection function (Control panel pause)	Via HC app			– sw upd.	Via HC ap	p a. sw upd.	
"Plug&Play" with GB plug	-	_		-		-	
SAFETY FEATURES							
Residual heat indicator / Pan recognition				/■		1	
Childproof lock / Safety time switch off				/■			
Pause function Countdown timer (Timer with automatic switch off for each zone)							
Count up timer				-			
Main on/off switch	I						
PERFORMANCE / TECHNICAL INFORMATION							
Maximum power output (W)	7,4			400		400	
Nominal voltage (V)	220			0-240		0-240	
Electrical cable length (cm) reelnduction zone - power (kW) / dimensions (mm)	-	-	1	10 _	1	-	
Rear left flexInduction zone - power (kW) / dimensions (mm)	2.20	 200 x 210		-	2.20	 190 x 230	
Rear left zone - power (kW) / diameter (mm)	-	-	1.60	145	-	-	
Rear right flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 210	2.20	200 x 210	-	-	
Rear right zone - power (kW) / diameter (mm)	-	-	-	-	1.60	145	
Rear centre zone - power (kW) / diameter (mm)	_	-	2.50	240	-	-	
Front centre zone - power (kW) / diameter (mm) Front left flexInduction zone - power (kW) / dimensions (mm)	2.20	- 200 x 210			- 2.20	- 190 x 230	
Front left zone - power (kW) / diameter (mm)	-	-	2.00	180	-	-	
Front right flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 210	2.20	200 x 210	-	-	
Front right zone - power (kW) / diameter (mm)	-	-	-	-	2.50	210	
lexInduction zone left - power (kW) / dimensions (mm)	3.30	400 x 210	-	-	3.30	380 x 230	
ilexInduction zone right - power (kW) / dimensions (mm)	3.30	400 x 210	3.30	400 x 210	-	-	
Extended flexInduction rear left - power (kW) / dimensions (mm) Extended flexInduction rear right - power (kW) / dimensions (mm)	-	-	-	-	-	-	
combiZone left - power (kW) / dimensions (mm)		_	_	-	_		
combiZone right - power (kW) / dimensions (mm)	-	-	-	-	-	-	
reeInduction zone right - powerBoost (max. kW)		-		-		-	
Rear left zone / Rear right zone - with powerBoost (max. kW)	3.70			/ 3.70	3.70	/ 2.20	
Rear centre zone - with powerBoost (max. kW)				.70		-	
Front left zone / Front right zone - with powerBoost (max. kW)	3.70	3.70	3.10/3.70		3.70 / 3.70		

Yes, model has this feature. – Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption. <sup>1</sup>Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed. <sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

Data valid in this table as of April 2024. Subject to modification without prior notice.


### Induction hobs

#### iQ 500 ED851HWB1E

Induction hob Black glass

80cm







Induction hob				
specifications		$\mathbb{R}^{+}$		
APPLIANCE TYPE	INDUCTI	ON HOB		
Design family	iQ 500			
Model number	ED8511	HWB1E		
DESIGN Width (mm)	or	2		
Control position / Control type	802 Front / touchSlider			
Style	U-b			
Domino compatible	-	-		
KEY FEATURES				
Home Connect				
cookConnect cookingSensor Plus ready <sup>1</sup>				
fryingSensor Plus settings for hob		-		
Intelligent hood automatic				
Favourite button				
Number of freeInduction zones	-	-		
Extended flexInduction zone <sup>2</sup>		-		
Number of flexInduction zones	-	-		
Number of combiZones activeLight	1			
HOB FEATURES				
Number of individual zones / Power levels	5/	17		
powerBoost / powerMove Plus		1-		
panBoost	via HC/Favourite I	Button a. sw upd.		
Adaptable volume / Energy consumption display				
Energy consumption display	-	-		
Keep warm function quickStart / Quick stop (Quick switch-off)	Via HC/Favourite I			
flexMotion	-			
reStart				
Demo mode				
Dish categories/setting recommendations	-	-		
Wipe protection function (Control panel pause)	-	-		
"Plug&Play" with GB plug SAFETY FEATURES	-	-		
Residual heat indicator / Pan recognition		1		
Childproof lock / Safety time switch off				
Pause function				
Countdown timer (Timer with automatic switch off for each zone)				
Count up timer		-		
		_		
PERFORMANCE / TECHNICAL INFORMATION Maximum power output (W)	7.4	00		
Nominal voltage (V)	220-			
Electrical cable length (cm)	11	10		
freeInduction zone - power (kW) / dimensions (mm)	-	-		
Rear left flexInduction zone - power (kW) / dimensions (mm)	-	-		
Rear left zone - power (kW) / diameter (mm)	1.60	145		
Rear right flexInduction zone - power (kW) / dimensions (mm)	-	-		
Rear right zone - power (kW) / diameter (mm) Rear centre zone - power (kW) / diameter (mm)	2.50 2.50	190 x 210 240		
Front centre zone - power (kW) / diameter (mm)	-	-		
Front left flexInduction zone - power (kW) / dimensions (mm)	-	-		
Front left zone - power (kW) / diameter (mm)	2.00	180		
Front right flexInduction zone - power (kW) / dimensions (mm)	-	-		
Front right zone - power (kW) / diameter (mm)	2.50	90 x 210		
flexInduction zone left - power (kW) / dimensions (mm)		_		
flexInduction zone right - power (kW) / dimensions (mm) Extended flexInduction rear left - power (kW) / dimensions (mm)		-		
Extended flexinduction rear right - power (kW) / dimensions (mm)	_	_		
combiZone left - power (kW) / dimensions (mm)	_			
combiZone right - power (kW) / dimensions (mm)	3.30	380 x 210		
freeInduction zone right - powerBoost (max. kW)	-			
Rear left zone / Rear right zone - with powerBoost (max. kW)	2.20			
Rear centre zone - with powerBoost (max. kW) Front left zone / Front right zone - with powerBoost (max. kW)	3.1			
noncien zone / Froncinghi zone - with powerBoost (max. KW)	3.10	3.70		

Yes, model has this feature. – Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

Max 3 sensors at any time. 'Ready' identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed. 'On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

Data valid in this table as of April 2024. Subject to modification without prior notice.

					reddot wi	inner 2023		
		2 year warranty	2 ye	ar ntv	il <b>:</b>	DESIGN AWARD 2023	2	year artanty
Induction hob		-				-		
specifications		11 - <sub>17</sub>				1.4	· · · · · · · · · ·	1
APPLIANCE TYPE				INDUCTI	ON HOBS			
Design family	iQ	500	iQ		iQ	100	iQ	100
Model number	ED651	1HSB1E	EH801	HVB1E	EH601	HEB1E	EH831	HVB1E
DESIGN								
Width (mm)		92	79			72	80	
Control position / Control type		ouchSlider oevel	Front / to Flus			uchSlider ih fit	Front / to Front	
Style Domino compatible		-	Flus			-	Front	
KEY FEATURES			1		1			
Home Connect	r			I		•		1
cookConnect				I				1
cookingSensor Plus ready1		-	-			-	-	
fryingSensor Plus settings for hob		-	-			-		
Intelligent hood automatic Favourite button								
Number of freeInduction zones		-		-		-	-	-
Extended flexInduction zone <sup>2</sup>		-	-			_	-	
Number of flexInduction zones		-	-		-	_	-	-
Number of combiZones		1	-		-	_	-	
activeLight		-	-		-	-	-	
HOB FEATURES		47	5.4	47		47	51	47
Number of individual zones / Power levels powerBoost / powerMove Plus		17	5/			17	51	
panBoost		Button a. sw upd.	via HC/Favourite E			Button a. sw upd.	via HC/Favourite I	
Adaptable volume / Energy consumption display		1-				1-		
Keep warm function	via HC/Favourite	Button a. sw upd.	via HC/Favourite B	Button a. sw upd.	via HC/Favourite	Button a. sw upd.	via HC/Favourite I	Button a. sw upd.
quickStart / Quick stop (Quick switch-off)		1 -		! —		1 -		1 -
flexMotion		-	-			-	-	
reStart								
Demo mode Dish categories/setting recommendations		-		-		_		
Wipe protection function (Control panel pause)								
"Plug&Play" with GB plug		-	-		-	_	-	
SAFETY FEATURES								
Residual heat indicator / Pan recognition		/	<b></b>			1	<b></b> /	
Childproof lock / Safety time switch off		1	<b>■</b> /			1	<b>■</b> /	
Pause function Countdown timer (Timer with automatic switch off for each zone)				-				
Count down timer (Timer with automatic switch off for each 20ne) Count up timer		-				_		
Main on/off switch								I
PERFORMANCE / TECHNICAL INFORMATION			1		1			
Maximum power output (W)	6,9	900	7,4	00	7,4	400	7,4	00
Nominal voltage (V)		-240	220-			-240	220-	
Electrical cable length (cm)		10	11			10	11	
freeInduction zone - power (kW) / dimensions (mm) Rear left flexInduction zone - power (kW) / dimensions (mm)		-	-			-		
Rear left zone - power (kW) / diameter (mm)	2.50	 190 x 210	1.60	145	2.00	180	1.60	145
Rear right flexInduction zone - power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-
Rear right zone - power (kW) / diameter (mm)	1.60	145	1.60	145	1.60	145	1.60	145
			2.50	240	-	-	2.20	240
Rear centre zone - power (kW) / diameter (mm)	-	-						
Rear centre zone - power (kW) / diameter (mm) Front centre zone - power (kW) / diameter (mm)		-	-	-	-	-	-	-
Rear centre zone - power (kW) / diameter (mm) Front centre zone - power (kW) / diameter (mm) Front left flexInduction zone - power (kW) / dimensions (mm)	- - -		-	-	-	-	-	-
Rear centre zone - power (kW) / diameter (mm) Front centre zone - power (kW) / diameter (mm) Front left flexInduction zone - power (kW) / dimensions (mm) Front left zone - power (kW) / diameter (mm)		- - 190 x 210	- - 2.00	-			- 2.00	
Rear centre zone - power (kW) / diameter (mm) Front centre zone - power (kW) / diameter (mm) Front left flexInduction zone - power (kW) / dimensions (mm) Front left zone - power (kW) / diameter (mm) Front right flexInduction zone - power (kW) / dimensions (mm)	- - - 2.50		-	- - 180	- 2.00	- 180	-	- 180
Rear centre zone - power (kW) / diameter (mm) Front centre zone - power (kW) / diameter (mm) Front left flexInduction zone - power (kW) / dimensions (mm) Front left zone - power (kW) / diameter (mm) Front right flexInduction zone - power (kW) / dimensions (mm) Front right zone - power (kW) / diameter (mm)	- - 2.50 -	- - 190 x 210 -	- - 2.00 -	- - 180 -	_ 2.00 _	- 180 -	- 2.00 -	- 180 -
Rear centre zone - power (kW) / diameter (mm) Front centre zone - power (kW) / diameter (mm) Front left flexInduction zone - power (kW) / dimensions (mm) Front left zone - power (kW) / diameter (mm) Front right zone - power (kW) / diameter (mm) flexInduction zone left - power (kW) / dimensions (mm)	- - 2.50 - 2.00	- - 190 x 210 - 180	- 2.00 - 2.50	- - 180 - 210	- 2.00 - 2.50	- 180 - 210	- 2.00 - 2.50	- 180 - 210
Rear centre zone - power (kW) / diameter (mm) Front centre zone - power (kW) / diameter (mm) Front left flexInduction zone - power (kW) / dimensions (mm) Front right flexInduction zone - power (kW) / dimensions (mm) Front right zone - power (kW) / diameter (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) Extended flexInduction rear left - power (kW) / dimensions (mm)		- - 190 x 210 - 180 -	- 2.00 - 2.50 -	- 180 - 210 -	- 2.00 - 2.50 -	- 180 - 210 -	- 2.00 - 2.50 -	- 180 - 210 -
Rear centre zone - power (kW) / diameter (mm) Front centre zone - power (kW) / diameter (mm) Front left flexInduction zone - power (kW) / dimensions (mm) Front left zone - power (kW) / diameter (mm) Front right flexInduction zone - power (kW) / dimensions (mm) Front right zone - power (kW) / diameter (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) Extended flexInduction rear left - power (kW) / dimensions (mm)	- - 2.50 - 2.00 - - - - - -	- - 190 x 210 - 180 - - - - -	- 2.00 - 2.50 - - - - -	- - 180 - 210 - - - - -	- 2.00 - 2.50 - - - -	- 180 - 210 - - - - -	- 2.00 - 2.50 - - - -	- 180 - 210 - - - - - -
Rear centre zone - power (kW) / diameter (mm) Front centre zone - power (kW) / diameter (mm) Front left flexInduction zone - power (kW) / dimensions (mm) Front left zone - power (kW) / diameter (mm) Front right texInduction zone - power (kW) / dimensions (mm) Front right zone - power (kW) / diameter (mm) flexInduction zone left - power (kW) / dimensions (mm) Extended flexInduction rear left - power (kW) / dimensions (mm) Extended flexInduction rear left - power (kW) / dimensions (mm) Extended flexInduction rear left - power (kW) / dimensions (mm)		- - 190 x 210 - 180 - - - - 380 x 210	- 2.00 - 2.50 - - - - - -	- 180 - 210 - - - - - -	- 2.00 - 2.50 - - - - - -	- 180 - 210 - - - - - - -	- 2.00 - - - - - - - - -	- 180 - 210 - - - - - - -
Rear centre zone - power (kW) / diameter (mm) Front centre zone - power (kW) / diameter (mm) Front left flexInduction zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) Extended flexInduction rear left - power (kW) / dimensions (mm) Extended flexInduction rear left - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm)		- - 190 x 210 - 180 - - - - -	- 2.00 - 2.50 - - - - -	- - 180 - 210 - - - - - - - -	- 2.00 - 2.50 - - - - - - - -	- 180 - 210 - - - - -	- 2.00 - 2.50 - - - -	- 180 - 210 - - - - - - - -
Rear centre zone - power (kW) / diameter (mm) Front centre zone - power (kW) / diameter (mm) Front centre zone - power (kW) / dimensions (mm) Front left flexInduction zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimeter (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) Extended flexInduction rear left - power (kW) / dimensions (mm) Extended flexInduction rear right - power (kW) / dimensions (mm) CombiZone left - power (kW) / dimensions (mm) combiZone right - power (kW) / dimensions (mm) freeInduction zone right - power (kW) / dimensions (mm)	- - 2.50 - 2.00 - - - - - - - - - - - - - - - - - -	- - 190 x 210 - 180 - - - - - 380 x 210 -	- 2.00 - 2.50 - - - - - - - - -	- - 180 - 210 - - - - - - - -	- 2.00 - 2.50 - - - - - - - - - - -	- 180 - 210 - - - - - - - - - -	- 2.00 - 2.50 - - - - - - - - -	- 180 - 210 - - - - - - -
Rear ingit zone - power (kW) / diameter (mm) Front centre zone - power (kW) / diameter (mm) Front centre zone - power (kW) / diameter (mm) Front left flexInduction zone - power (kW) / dimensions (mm) Front left zone - power (kW) / diameter (mm) Front right zone - power (kW) / diameter (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) Extended flexInduction rear left - power (kW) / dimensions (mm) Extended flexInduction rear right - power (kW) / dimensions (mm) Extended flexInduction rear right - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) freeInduction zone right - power(kW) / dimensions (mm) freeInduction zone right - powerBoost (max. kW) Rear (eft zone / Rear right zone - with powerBoost (max. kW)		- - 190 x 210 - 180 - - - - - - - - - - - - -	- 2.00 - 2.50 - - - - - - - - - - - -	- - 180 - - - - - - - - - - - - - - - - - - -	- 2.00 - 2.50 - - - - - - - - - - 3.10	- 180 - 210 - - - - - - - -	- 2.00 - 2.50 - - - - - - - - - - - -	- 180 - 210 - - - - - - - - 2.20

2 year warranty

Ľ reddot winner 2023

Yes, model has this feature. – Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption. 'Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

<sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

Data valid in this table as of April 2024. Subject to modification without prior notice.

#### For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. 98

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

specifications APPLIANCE TYPE				INDUCTI	ON HOBS			
Design family	iQ	100	iQ		iQ	100	iQ	100
Model number	EH631		EU611		EU611			AGA5B
DESIGN								
Nidth (mm)	59	92	59	92	59	92	59	92
Control position / Control type	Front / tou	uchSlider	Front / to	uchSlider	Front / to	uchSlider	Front / to	uchSlider
Style	Front	bevel	Fraer	nless	Fram	eless	Fram	neless
Domino compatible	-	-	-	-	-	-	-	-
KEY FEATURES							_	
Home Connect	-		-	-	-	-	-	-
cookConnect			-		-			-
cookingSensor Plus ready <sup>1</sup>	-		-	-	-		-	-
fryingSensor Plus settings for hob	-		-	-	-			-
Intelligent hood automatic Favourite button					-			
Number of freeInduction zones								
Extended flexInduction zone <sup>2</sup>								_
Number of flexinduction zones								
Number of combiZones	-	-	-	-	-		-	_
activeLight	-	-	-	-	-		-	_
HOB FEATURES							·	
Number of individual zones / Power levels	4 /	17	4 /	17	4 /	17	4	/9
powerBoost / powerMove Plus		1 -		1 -		1 -	Rear left	t only / –
panBoost	via HC/Favourite E	Button a. sw upd.	-		-		-	
Adaptable volume / Energy consumption display	<b>_</b> /	1 -	- 1	I –	-	I-	-	I –
Keep warm function	via HC/Favourite B	Button a. sw upd.	-	-	-	-	-	_
quickStart / Quick stop (Quick switch-off)		I –		/				/ 🔳
flexMotion	-	-	-	-	-	-	-	-
reStart	-						-	-
Demo mode	-		-	-	-	-	-	-
Dish categories/setting recommendations		-	-	-	-	-	-	-
Wipe protection function (Control panel pause)	-	_	-	_	-		-	
"Plug&Play" with GB plug	-	-	-	-				
SAFETY FEATURES		-	_	-		_	_	-
Residual heat indicator / Pan recognition	■ /							/ <b>=</b>
Childproof lock / Safety time switch off Pause function	I							/ 🗖
Countdown timer (Timer with automatic switch off for each zone)				-		-		_
Count up timer		-				_		
Main on/off switch	-			•				
PERFORMANCE / TECHNICAL INFORMATION		-	_	-		-		_
Maximum power output (W)	7,4	100	4,6	500	3,7	'00	3.7	700
Nominal voltage (V)	220-		220-		220			-240
Electrical cable length (cm)	11	10	11	10	11	10	11	10
freeInduction zone - power (kW) / dimensions (mm)	-	_	-	_	-	-	-	_
Rear left flexInduction zone - power (kW) / dimensions (mm)	-	_	-	_	-	-	-	_
Rear left zone - power (kW) / diameter (mm)	2.00	180	1.80	180	1.80	180	1.80	180
Rear right flexInduction zone - power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-
Rear right zone - power (kW) / diameter (mm)	1.60	145	1.40	145	1.40	145	1.40	145
Rear centre zone - power (kW) / diameter (mm)	-	-	-	-	-	_	-	-
Front centre zone - power (kW) / diameter (mm)	-	-	-	-	-	-	-	-
Front left flexInduction zone - power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-
-	2.00	180	1.80	180	1.80	180	1.40	145
Front left zone - power (kW) / diameter (mm)	-	-	-	-	-	-	-	-
ront left zone - power (kW) / diameter (mm) ront right flexInduction zone - power (kW) / dimensions (mm)		210	2.20	210	2.20	210	1.80	180
ront left zone - power (kW) / diameter (mm) ront right flexInduction zone - power (kW) / dimensions (mm) ront right zone - power (kW) / diameter (mm)	2.50		-	-	_	_	-	-
ront left zone - power (kW) / diameter (mm) ront right flexInduction zone - power (kW) / dimensions (mm) ront right zone - power (kW) / diameter (mm) lexInduction zone left - power (kW) / dimensions (mm)	-	-		-	-	_	-	-
ront left zone - power (kW) / diameter (mm) ront right flexInduction zone - power (kW) / dimensions (mm) ront right zone - power (kW) / diameter (mm) lexInduction zone left - power (kW) / dimensions (mm) lexInduction zone right - power (kW) / dimensions (mm)	-	-	_				-	-
ront left zone - power (kW) / diameter (mm) ront right flexInduction zone - power (kW) / dimensions (mm) ront right zone - power (kW) / diameter (mm) lexInduction zone left - power (kW) / dimensions (mm) lexInduction zone right - power (kW) / dimensions (mm) ixtended flexInduction rear left - power (kW) / dimensions (mm)	- - -	-	-	-	-	-		
ront left zone - power (kW) / diameter (mm) ront right flexInduction zone - power (kW) / dimensions (mm) ront right zone - power (kW) / diameter (mm) lexInduction zone left - power (kW) / dimensions (mm) lexInduction zone right - power (kW) / dimensions (mm) ixtended flexInduction rear right - power (kW) / dimensions (mm)	- - - -	- - -	-	-	-	-	-	-
ront left zone - power (kW) / diameter (mm) ront right flexInduction zone - power (kW) / dimensions (mm) ront right zone - power (kW) / diameter (mm) lexInduction zone left - power (kW) / dimensions (mm) lexInduction zone right - power (kW) / dimensions (mm) xtended flexInduction rear right - power (kW) / dimensions (mm) ombiZone left - power (kW) / dimensions (mm)	- - - - -	- - - -	- - -	-	-	-	-	-
ront left zone - power (kW) / diameter (mm) ront right flexInduction zone - power (kW) / dimensions (mm) ront right zone - power (kW) / diameter (mm) lexInduction zone left - power (kW) / dimensions (mm) lexInduction zone right - power (kW) / dimensions (mm) xtended flexInduction rear left - power (kW) / dimensions (mm) ombiZone left - power (kW) / dimensions (mm) ombiZone right - power (kW) / dimensions (mm)	- - - -	- - -	-	-	- - -	- - -	- - -	-
Front left zone - power (kW) / diameter (mm) Front right flexInduction zone - power (kW) / dimensions (mm) Front right zone - power (kW) / diameter (mm) TexInduction zone left - power (kW) / dimensions (mm) TexInduction zone right - power (kW) / dimensions (mm) Extended flexInduction rear left - power (kW) / dimensions (mm) Extended flexInduction rear right - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) tombiZone right - power (kW) / dimensions (mm) TeeInduction zone right - powerBoost (max. kW)	- - - - - - -	- - - - -	- - - - -	- - -	- - - -	- - -	- - - -	-
ront left zone - power (kW) / diameter (mm) ront right flexInduction zone - power (kW) / dimensions (mm) ront right zone - power (kW) / diameter (mm) lexInduction zone left - power (kW) / dimensions (mm) lexInduction zone right - power (kW) / dimensions (mm) xixtended flexInduction rear left - power (kW) / dimensions (mm) ombiZone left - power (kW) / dimensions (mm) ombiZone right - power (kW) / dimensions (mm)	- - - - -	- - - - - - - - - - - - - - - - - - -	- - -	- - - 2.20	- - -	- - - 2.20	- - -	- - 0 / -


Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed. <sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

Data valid in this table as of April 2024. Subject to modification without prior notice.





### quickLite ceramic hob product overview

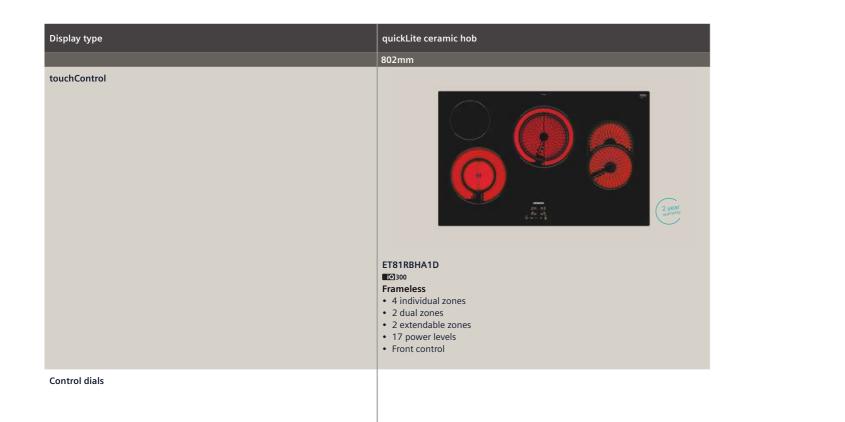

quickLite ceramic hob 592mm

ET61RBEA1E To 100 Frameless • 4 individual zones • 17 power levels

I7 power levels
Front control




#### 2 year warranty

A two year warranty is available on all Siemens hobs listed in this brochure to protect against manufacturing and material faults during this warranty period.

quickLite ceramic hob

592mm



### ET61RCEA1E

#### Frameless


- 4 individual zones
- 9 power levels
- Side control

### quickLite ceramic hobs

80cm

#### iQ 300 ET81RBHA1D

Ceramic hob Black glass



touchControl
2 year warranty

102

uickLite ceramic hob pecifications		7 2
APPLIANCE TYPE	QUICKLITE C	ERAMIC HOB
Design family	iQ	300
Model number	ET81R	BHA1D
DESIGN		
Width (mm)	80	
Control position	Fro	ont
Control type	touchC	ontrol
Style	Fram	eless
KEY FEATURES		
Number of individual zones	4	ŧ
Number of dual zones	2	2
Number of extendable zones	2	2
powerBoost	-	
Power levels	1	
Digital display		
Quick Stop (Quick switch-off)		
Restart function		
Energy consumption display	-	
Demo Mode		
Keep warm function	-	
"Plug&Play" with GB Plug	-	
Wipe protection function	-	
SAFETY FEATURES		
Residual heat indicator		
Childproof lock		
Timed safety switch off		
Countdown timer	-	
Count up timer	-	
Main on/off switch		
PERFORMANCE / TECHNICAL INFORMATION	<u> </u>	
Maximum power output (W)	7,4	00
Nominal voltage (V)	220-	240
Electrical cable length (cm)	N/A or	h CMD
Rear left zone – power (kW) / diameter (mm)	1.20	145
Rear right zone – power (kW) / diameter (mm)	-	
Rear centre zone – power (kW) / diameter (mm)	1.50	180 (230
Front left zone – power (kW) / diameter (mm)	0.75	120 (210
Front right zone – power (kW) / diameter (mm)	1.80	170 (265
Rear left zone dual-power – power (kW) / diameter (mm)	-	
Rear right zone dual-power – power (kW) / diameter (mm)		
Rear centre zone dual-power – power (kW) / diameter (mm)	2.40	230
Front left zone dual-power – power (kW) / diameter (mm)	2.20	
Front right zone dual-power – power (kW) / diameter (mm)	2.60	
OPTIONAL ACCESSORIES		
Cast iron non-stick frying pan	HZ9F	E280
Set of three pans	HZ9S	

Yes, model has this feature. – Feature not available for this model. All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

Data valid in this table as of April 2024. Subject to modification without prior notice.



quickLite ceramic hob specifications

Design family	iQ 100		iQ 100		
Model number	ET61RBEA1E		ET61RCEA1E		
DESIGN					
Width (mm)	5	92	55	92	
Control position		ont	Side		
Control type		Control	Contro		
Style		neless	Fram		
KEY FEATURES					
Number of individual zones		4		4	
Number of dual zones		-		-	
Number of extendable zones		-		_	
powerBoost		-		-	
Power levels	1	17		9	
Digital display				_	
Quick Stop (Quick switch-off)		= =		-	
Restart function				-	
Energy consumption display		-		-	
Demo Mode				_	
Keep warm function		-	-	_	
"Plug&Play" with GB Plug		-		_	
Wipe protection function		-	_		
SAFETY FEATURES					
Residual heat indicator					
Childproof lock			_		
Timed safety switch off		-	_		
Countdown timer		-	_		
Count up timer		-	-	_	
Main on/off switch				-	
PERFORMANCE / TECHNICAL INFORMATION					
Maximum power output (W)	6,	600	6,6	500	
Nominal voltage (V)	220	0-240	220	-240	
Electrical cable length (cm)	Ν	I/A	N	/A	
Rear left zone – power (kW) / diameter (mm)	2.00	180	2.20	210	
Rear right zone – power (kW) / diameter (mm)	1.20	145	1.20	145	
Rear centre zone – power (kW) / diameter (mm)	-	-	_	_	
Front left zone – power (kW) / diameter (mm)	1.20	145	1.20	145	
Front right zone – power (kW) / diameter (mm)	2.20	210	2.00	180	
Rear left zone dual-power – power (kW) / diameter (mm)	-	_	-	_	
Rear right zone dual-power – power (kW) / diameter (mm)	-	_	_	_	
Rear centre zone dual-power – power (kW) / diameter (mm)	_	_	_	_	
Front left zone dual-power – power (kW) / diameter (mm)	-	_	_	_	
Front right zone dual-power – power (kW) / diameter (mm)	_	_	_	_	
OPTIONAL ACCESSORIES		·			
Cast iron non-stick frying pan	HZ9	FE280	HZ9F	E280	
Set of three pans		SE030	HZ9S		

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.


Data valid in this table as of April 2024. Subject to modification without prior notice.



2 year warranty



### Gas hobs product overview

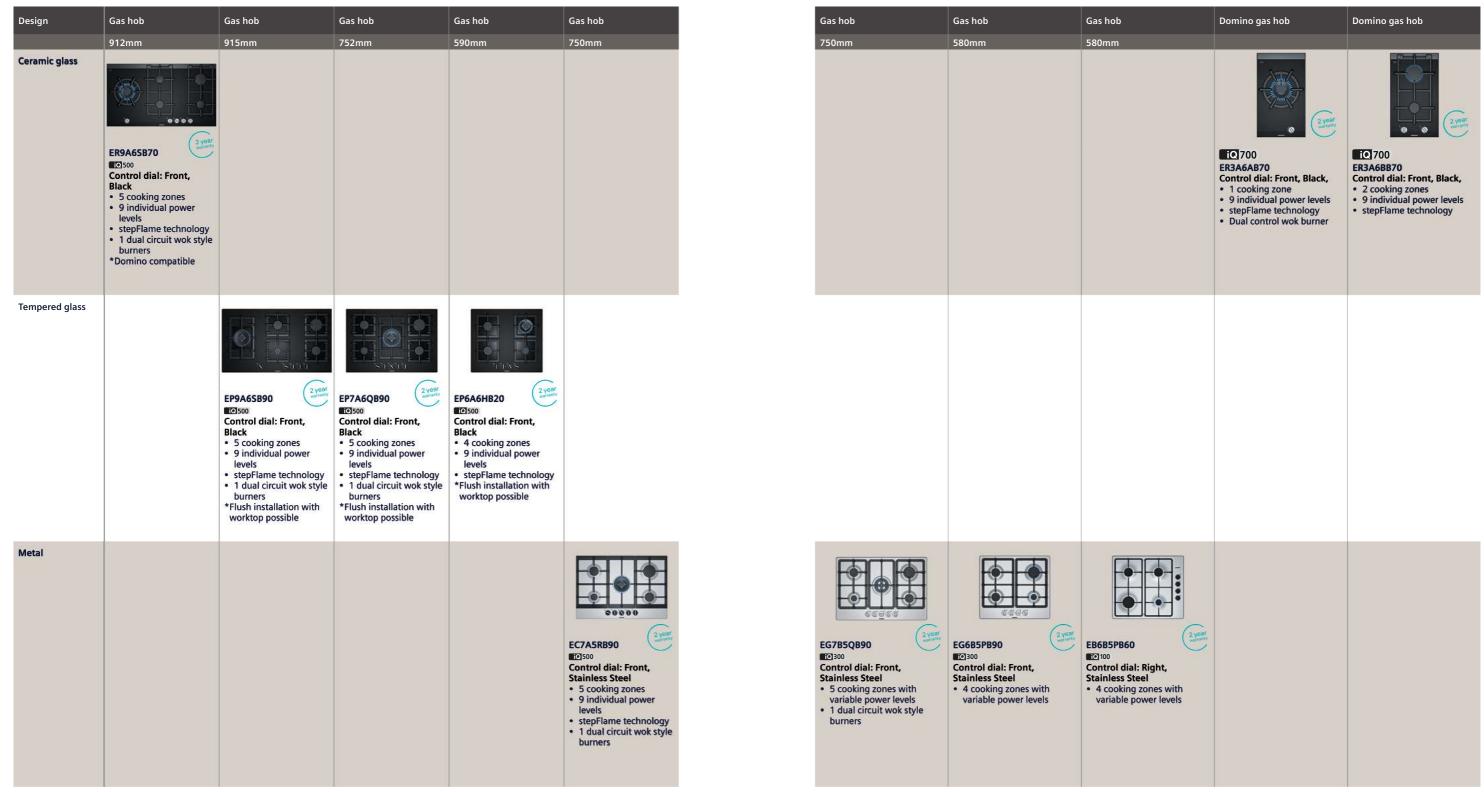




#### 2 year warranty

A two year warranty is available on all Siemens hobs listed in this brochure to protect against manufacturing and material faults during this warranty period.

### Gas hobs

#### iQ 700 ER9A6SB70

Gas hob Black ceramic glass



Individual power levels Variable power levels Cast iron pan supports (number) Cast iron finish pan supports (number) Dishwasher safe pan supports (number) Dishwasher safe pan supports 4 Low profile single piece burners Two piece burners SAFETY FEATURES Ignition via control dials Flame failure safety device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (A) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Rear right burner power (kW) Front right burner power (kW) Right burner power (kW) Pre-set for natural gas	GAS HOB
Model number       Stainless steel         Black         DESIGN         Hob surface type         Width (mm)         Control position         Control position         Control position         Control position         Can be combined with other models with Comfort Profile         Installation flush with work top possible         Domino compatible         KEY FEATURES         StepFlame Technology         Digital power level display         Number of dual circuit wok style burners'         High power (S.O.KW+) wok burner2         Dual control wok burner3         FEATURES         Number of cooking zones         Individual power levels         Variable power levels         Cast iron pan supports (number)         Cast iron pan supports (number)         Dishwasher safe pan supports <sup>4</sup> Low profile single piece burners         Two piece burners         SAFETY FEATURES         Ignition via control dials         Flame failure safety device         PERFORMANCE / TECHNICAL INFORMATION         Maximum gas power output load (A)         Nominal voltage (V)         Total connected electrical load (max. W)         C	iQ 700
Stainless steel         Black         DESIGN         Hob surface type         Width (mm)         Control position         Comfort Profile         Can be combined with other models with Comfort Profile         Installation flush with work top possible         Domino compatible         KEY FEATURES         stepFlame Technology         Digital power level display         Number of dual circuit wok style burners'         High power (5.0KW+) wok burner <sup>2</sup> Dual control wok burner <sup>3</sup> FEATURES         Number of cooking zones         Individual power levels         Variable power levels         Cast iron finish pan supports (number)         Cast iron finish pan supports (number)         Dishwasher safe pan supports (number)         Low profile single piece burners         Two piece burners         SAFETY FEATURES         Ignition via control dials         Flame failure safety device         PERFORMANCE / TECHNICAL INFORMATION         Maximum gas power output load (A)         Nominal voltage (V)         Total connected electrical load (max. W)         Cable length (cm)         Gap lug         Left burner pow	ER9A6SB70
Black       DESIGN       Hob surface type       Width (mm)       Control position       Comfort Profile       Can be combined with other models with Comfort Profile       Installation flush with work top possible       Domino compatible       KEY FEATURES       stepFlame Technology       Digital power level display       Number of dual circuit wok style burners'       High power (5.0KW+) wok burner'       Dual control wok burner'       PEATURES       StepFlame Technology       Digital power level display       Number of cooking zones       Individual power levels       Variable power levels       Cast iron pan supports (number)       Cast iron pan supports (number)       Dishwasher safe pan supports       Low profile single piece burners       Two piece burners       SAFETY FEATURES       Ignition via control dials       Flame failure safety device       PERFORMANCE / TECHNICAL INFORMATION       Maximum gas power output load (A)       Nominal voltage (V)       Total connected electrical load (max. W)       Cable length (cm)       Gel plug       Left burner power (kW)       Front left burner power (kW)       Rear left burner power (kW)       Centre back burner power (kW)	EK9A03670
DESIGN         Hob surface type         Width (mm)         Control position         Comfort Profile         Can be combined with other models with Comfort Profile         Installation flush with work top possible         Domino compatible         KEY FEATURES         StepFlame Technology         Digital power level display         Number of dual circuit wok style burners <sup>1</sup> High power (5.0kW+) wok burner <sup>2</sup> Dual control wok burner <sup>3</sup> FEATURES         Number of cooking zones         Individual power levels         Cast iron finish pan supports (number)         Cast iron finish pan supports (number)         Dishwasher safe pan	-
Hob surface typeHob surface typeWidth (mm)Control positionControl positionControl positionCan be combined with other models with Comfort ProfileInstallation flush with work top possibleDomino compatibleKEY FEATURESStepFlame TechnologyDigital power level displayNumber of dual circuit wok style burners'HildHigh power (SoUK+) wok burner²Dual control wok burner³Dual control wok burner³Control wok burner³FEATURESControl wok burner³Number of cooking zonesIndividual power levelsCast iron pan supports (number)Coast iron pan supports (number)Cast iron pan supports (number)Coast iron flish pan supports fLow profile single piece burnersSAFETY FEATURESSAFETY FEATURESFEAFORMANCE / TECHNICAL INFORMATIONMaximum gas power output load (A)Nominal voltage (V)Total connected electrical load (max. W)Cable length (cm)Cable length (cm)GB plugLeft burner power (kW)Erner failure power (kW)Rear left burner power (kW)Erner fornt burner power (kW)Rear ingth burner power (kW)Front left burner powe	
Width (mm)       Control position         Comfort Profile       Can be combined with other models with Comfort Profile         Installation flush with work top possible       Domino compatible         KEY FEATURES       StepFlame Technology         Digital power level display       Number of dual circuit wok style burners <sup>1</sup> High power (S.OKW+) wok burner <sup>2</sup> Dual control wok burner <sup>3</sup> FEATURES       StepFlame Technology         Dual control wok burner <sup>3</sup> StepFlame Technology         FEATURES       StepFlame Technology         Number of cooking zones       Individual power levels         Variable power levels       Cast iron pan supports (number)         Cast iron pan supports (number)       Cast iron pan supports (number)         Dishwasher safe pan supports <sup>4</sup> StafeT Y FEATURES         Ignition via control dials       FRERORMANCE / TECHNICAL INFORMATION         Maximum gas power output load (A)       Nominal voltage (V)         Total connected electrical load (max. W)       Cable length (cm)         GB plug       Left burner power (kW)         Front left burner power (kW)       Centrel/Centre front burner power (kW)         Rear ight burner power (kW)       Front left burner power (kW)         Rear ight burner power (kW)       Front left burner power (kW)	Ceramic glass
Control position Comfort Profile Can be combined with other models with Comfort Profile Installation flush with work top possible Domino compatible KEY FEATURES StepFlame Technology Digital power level display Number of dual circuit wok style burners' High power (5.0KW+) wok burner <sup>2</sup> Dual control wok burner <sup>3</sup> FEATURES Number of cooking zones Individual power levels Cast iron pan supports (number) Cast iron finish pan supports (number) Dishwasher safe pan supports <sup>4</sup> Low profile single piece burners Two piece burners SAFETY FEATURES Ignition via control dials Flame failure safety device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (A) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Rear left burner power (kW) Rear left burner power (kW) Right burner power (kW) Pre-set for natural gas	912
Comfort Profile Can be combined with other models with Comfort Profile Installation flush with work top possible Domino compatible KEY FEATURES stepFlame Technology Digital power level display Number of dual circuit wok style burners' High power (5.0kW+) wok burner <sup>2</sup> Dual control wok burner <sup>3</sup> FEATURES Number of cooking zones Individual power levels Cast iron pan supports (number) Cast iron finish pan supports (number) Dishwasher safe pan supports <sup>4</sup> Low profile single piece burners Two piece burners SAFETY FEATURES Ignition via control dials Flame failure safety device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (A) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Rear left burner power (kW) Front left burner power (kW) Rear right burner power (kW) Right burner power (kW) Pre-set for natural gas	Front
Can be combined with other models with Comfort Profile Installation flush with work top possible Domino compatible KEY FEATURES StepFlame Technology Digital power level display Number of dual circuit wok style burners <sup>1</sup> High power (5.0kW+) wok burner <sup>2</sup> Dual control wok burner <sup>3</sup> FEATURES StepFlame for Cooking zones Individual power levels Cast iron pan supports (number) Cast iron finish pan supports (number) Dishwasher safe pan supports <sup>4</sup> Low profile single piece burners SAFETY FEATURES SAFETY FEATURES Ignition via control dials FIAme failure safety device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (A) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) Gab length (cm) Gab length (cm) Front left burner power (kW) Rear left burner power (kW) Rear right burner power (kW) Rear fing hurner power (kW) Pre-set for natural gas	
Installation flush with work top possible Domino compatible KEY FEATURES StepFlame Technology Digital power level display Number of dual circuit wok style burners <sup>1</sup> High power (5.0kW+) wok burner <sup>2</sup> Dual control wok burner <sup>3</sup> FEATURES Number of cooking zones Individual power levels Cast iron pan supports (number) Cast iron pan supports (number) Dishwasher safe pan supports <sup>4</sup> Low profile single piece burners SAFETY FEATURES Ignition via control dials FIBme failure safety device FEFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (A) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Rear left burner power (kW) Rear right burner power (kW) Rear right burner power (kW) Rear right burner power (kW) Rear signt burner power (kW) Pre-set for natural gas	
Domino compatible KEY FEATURES stepFlame Technology Digital power level display Number of dual circuit wok style burners' High power (S.0KW+) wok burner <sup>2</sup> Dual control wok burner <sup>3</sup> FEATURES Number of cooking zones Individual power levels Variable power levels Cast iron finish pan supports (number) Cast iron finish pan supports (number) Dishwasher safe pan supports <sup>4</sup> Low profile single piece burners XAFET FEATURES Ignition via control dials FIAme failure safety device FERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (A) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Rear left burner power (kW) Rear right burner power (kW) Rear right burner power (kW) Pre-set for natural gas	
KEY FEATURES         stepFlame Technology         Digital power level display         Number of dual circuit wok style burners <sup>1</sup> High power (5.0kW+) wok burner <sup>2</sup> Dual control wok burner <sup>3</sup> FEATURES         Number of cooking zones         Individual power levels         Variable power levels         Cast iron pan supports (number)         Cast iron pan supports (number)         Dishwasher safe pan supports <sup>4</sup> Low profile single piece burners         Two piece burners         SAFET Y EATURES         Ignition via control dials         Flame failure safety device         PERFORMANCE / TECHNICAL INFORMATION         Maximum gas power output load (A)         Nominal voltage (V)         Total connected electrical load (max. W)         Cable length (cm)         GB plug         Left burner power (kW)         Front left burner power (kW)         Rear left burner power (kW)         CentrelCentre front burner power (kW)         Rear left burner power (kW)         Rear right bur	
stepFlame Technology         Digital power level display         Number of dual circuit wok style burners <sup>1</sup> High power (5.0kW+) wok burner <sup>2</sup> Dual control wok burner <sup>3</sup> FEATURES         Number of cooking zones         Individual power levels         Variable power levels         Cast iron pan supports (number)         Cast iron finish pan supports (number)         Dishwasher safe pan supports (number)         Data control dials         Flame failure safety device         PEREORMANCE / TECHNICAL INFORMATION	
Digital power level display         Number of dual circuit wok style burners¹         High power (5.0kW+) wok burner²         Dual control wok burner³         FEATURES         Number of cooking zones         Individual power levels         Variable power levels         Cast iron pan supports (number)         Cast iron finish pan supports (number)         Dishwasher safe pan supports (number)         Dishwasher safe pan supports full         SAFETY FEATURES         Ignition via control dials         Flame failure safety device         PERFORMANCE / TECHNICAL INFORMATION         Maximum gas power output load (A)         Nominal voltage (V)         Total connected electrical load (max. W)         Cable length (cm)         GB plug         Left burner power (kW)         Front left burner power (kW)         Rear left burner power (kW)         Centre back burner power (kW)         Front left burner power (kW)	
Number of dual circuit wok style burners¹         High power (5.0kW+) wok burner²         Dual control wok burner³ <b>FEATURES</b> Number of cooking zones         Individual power levels         Variable power levels         Cast iron pan supports (number)         Cast iron finish pan supports (number)         Dishwasher safe pan supports (number)         Maximum gas power output saft (number)         Maximum gas power output load (A)         Nominal voltage (V)         Total connected electrical load (max. W)         Cable length (cm)         GB plug         Left burner power (kW)         Rear left burner power (kW) </td <td></td>	
High power (5.0kW+) wok burner <sup>2</sup> Dual control wok burner <sup>9</sup> FFATURES Number of cooking zones Individual power levels Cast iron pan supports (number) Cast iron finish pan supports (number) Dishwasher safe pan supports (number) Dishwasher safe pan supports (number) Dishwasher safe pan supports (number) SAFETY FFATURES Ignition via control dials Flame failure safety device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (A) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Rear left burner power (kW) Rear left burner power (kW) Rear ight burner power (kW) Rear ight burner power (kW) Rear ight burner power (kW) Pront light burner power (kW) Right burner power (kW) Pre-set for natural gas	
Dual control wok burner³         FEATURES         Number of cooking zones         Individual power levels         Cast iron finish pan supports (number)         Cast iron finish pan supports (number)         Dishwasher safe pan supports (number)         SAFETY FEATURES         Ignition via control dials         Flame failure safety device         PERFORMANCE / TECHNICAL INFORMATION         Maximum gas power output load (A)         Nominal voltage (V)         Total connected electrical load (max. W)         Cable length (cm)         GB plug       Eleft burner power (kW)         Front left burner power (kW)       Enter burner power (kW)         Centre back burner power (kW)       Enter back burner power (kW)         Rear	
FEATURES         Number of cooking zones         Individual power levels         Cast iron pan supports (number)         Cast iron pan supports (number)         Dishwasher safe pan supports*         Low profile single piece burners         Two piece burners         SAFETY FEATURES         Ignition via control dials         Flame failure safety device         PERFORMANCE / TECHNICAL INFORMATION         Maximum gas power output load (A)         Nominal voltage (V)         Total connected electrical load (max. W)         Cable length (cm)         GB plug         Left burner power (kW)         Front left burner power (kW)         Rear left burner power (kW)         Rear left burner power (kW)         Rear light burner power (kW)         Rear light burner power (kW)         Pront light burner power (kW)         Rear light burner power (kW)         Rear light burner power (kW)         Pront light burner power (kW)         Pront light burner power (kW)         Rear light burner power (kW)         Prost light burner power (kW)         Rear light burner power (kW)         Rear light burner power (kW)         Rear tight burner power (kW)         Rea	
Number of cooking zones         Individual power levels         Cast iron pan supports (number)         Cast iron finish pan supports (number)         Dishwasher safe pan supports (number)         Dishwasher safe pan supports *         Low profile single piece burners         SAFETY FEATURES         Ignition via control dials         Flame failure safety device         PERFORMANCE / TECHNICAL INFORMATION         Maximum gas power output load (A)         Nominal voltage (V)         Total connected electrical load (max. W)         Cable length (cm)         GB plug         Left burner power (kW)         Rear left burner power (kW)         CentrelCentre front burner power (kW)         CentrelCentre front burner power (kW)         Rear right burner power (kW)         Pront right burner power (kW)         Rear right burner power (kW)         Ro	
Individual power levels Variable power levels Cast iron pan supports (number) Cast iron finish pan supports (number) Dishwasher safe pan supports (number) Dishwasher safe pan supports 4 Low profile single piece burners Two piece burners SAFETY FEATURES Ignition via control dials Flame failure safety device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (A) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Rear right burner power (kW) Front right burner power (kW) Right burner power (kW) Pre-set for natural gas	
Variable power levels         Cast iron pan supports (number)         Cast iron finish pan supports (number)         Dishwasher safe pan supports (number)         Dishwasher safe pan supports *         Low profile single piece burners         Two piece burners         SAFETY EFATURES         Ignition via control dials         Flame failure safety device         PERFORMANCE / TECHNICAL INFORMATION         Maximum gas power output load (A)         Nominal voltage (V)         Total connected electrical load (max. W)         Cable length (cm)         GB plug         Left burner power (kW)         Front left burner power (kW)         Centre back burner power (kW)         Rear right burner power (kW)         Front right burner power (kW)         Pront right bur	
Cast iron pan supports (number) Cast iron finish pan supports (number) Dishwasher safe pan supports (number) SAFETY FEATURES SafeTY FEATURES SafeTY FEATURES SafeTY GEAUXED FIDE SAFETY SA	
Cast iron finish pan supports (number) Dishwasher safe pan supports Low profile single piece burners Two piece burners SAFETY FEATURES Ignition via control dials Flame failure safety device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (A) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Centre fort burner power (kW) Fent fight burner power (kW) Rear right burner power (kW) Rear right burner power (kW) Rear fort burner power (kW) Rear fort burner power (kW) Rear fort burner power (kW) Pre-set for natural gas	
Dishwasher safe pan supports <sup>4</sup> Low profile single piece burners Two piece burners SAFETY FEATURES Ignition via control dials Flame failure safety device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (A) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Rear left burner power (kW) Centre back burner power (kW) Rear right burner power (kW) Rear right burner power (kW) Rear tight burner power (kW) Pront fight burner power (kW) Rear tight burner power (kW) Pre-set for natural gas	
Low profile single piece burners         Two piece burners         SAFETY FEATURES         Ignition via control dials         Flame failure safety device         PERFORMANCE / TECHNICAL INFORMATION         Maximum gas power output load (A)         Nominal voltage (V)         Total connected electrical load (max. W)         Cable length (cm)         GB plug         Left burner power (kW)         Front left burner power (kW)         Centre/Centre front burner power (kW)         Centre/Dack burner power (kW)         Front right burner power (kW)         Front right burner power (kW)         Preser torn stural gas	
Two piece burners         SAFETY FEATURES         Ignition via control dials         Flame failure safety device         PERFORMANCE / TECHNICAL INFORMATION         Maximum gas power output load (A)         Nominal voltage (V)         Total connected electrical load (max. W)         Cable length (cm)         GB plug         Left burner power (kW)         Front left burner power (kW)         Centre/Centre front burner power (kW)         Centre back burner power (kW)         Front right burner power (kW)         Front right burner power (kW)         Prost for natural gas	
SAFETY FEATURES Ignition via control dials Ignition via control dials Flame failure safety device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (A) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Centre/Centre front burner power (kW) Centre back burner power (kW) Front right burner power (kW) Front right burner power (kW) Right burner power (kW) Pre-set for natural gas	
Ignition via control dials       Flame failure safety device       PERFORMANCE / TECHNICAL INFORMATION       Maximum gas power output load (A)       Nominal voltage (V)       Total connected electrical load (max. W)       Cable length (cm)       GB plug       Left burner power (kW)       Front left burner power (kW)       Centre back burner power (kW)       Rear right burner power (kW)       Front tight burner power (kW)       Prot tight burner power (kW)       Pre-set for natural gas	
PERFORMANCE / TECHNICAL INFORMATION         Maximum gas power output load (A)         Nominal voltage (V)         Total connected electrical load (max. W)         Cable length (cm)         GB plug         Left burner power (kW)         Front left burner power (kW)         Centre back burner power (kW)         Rear left burner power (kW)         Rear right burner power (kW)         Rear right burner power (kW)         Pront right burner power (kW)         Right burner power (kW)         Pre-set for natural gas	
Maximum gas power output load (A) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Centre/Centre front burner power (kW) Centre back burner power (kW) Rear right burner power (kW) Front right burner power (kW) Prot right burner power (kW) Pre-set for natural gas	
Nominal voltage (V)         Total connected electrical load (max. W)         Cable length (cm)         GB plug         Left burner power (kW)         Front left burner power (kW)         CentrelCentre front burner power (kW)         Centre back burner power (kW)         Rear right burner power (kW)         Front right burner power (kW)         Pront right burner power (kW)         Pre-set for natural gas	
Total connected electrical load (max. W)         Cable length (cm)         GB plug         Left burner power (kW)         Front left burner power (kW)         Centrel cont burner power (kW)         Centrel cont burner power (kW)         Rear right burner power (kW)         Front right burner power (kW)         Pront right burner power (kW)         Pre-set for natural gas	13,800
Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Centrel Centre front burner power (kW) Centre back burner power (kW) Front right burner power (kW) Front right burner power (kW) Pre-set for natural gas	220-240
GB plug Left burner power (kW) Front left burner power (kW) CentrelCentre front burner power (kW) Centreback burner power (kW) Rear right burner power (kW) Front right burner power (kW) Right burner power (kW) Pre-set for natural gas	
Left burner power (kW) Front left burner power (kW) Rear left burner power (kW) Centre/Centre front burner power (kW) Rear right burner power (kW) Front right burner power (kW) Right burner power (kW) Pre-set for natural gas	150
Front left burner power (kW) Rear left burner power (kW) Centre/Centre front burner power (kW) Centre back burner power (kW) Rear right burner power (kW) Front right burner power (kW) Right burner power (kW) Pre-set for natural gas	
Rear left burner power (kW)         Centre/Centre front burner power (kW)         Centre back burner power (kW)         Rear right burner power (kW)         Front right burner power (kW)         Right burner power (kW)         Pre-set for natural gas	6.10
Centre/Centre front burner power (kW) Centre back burner power (kW) Rear right burner power (kW) Front right burner power (kW) Right burner power (kW) Pre-set for natural gas	
Centre back burner power (kW) Rear right burner power (kW) Front right burner power (kW) Right burner power (kW) Pre-set for natural gas	
Rear right burner power (kW) Front right burner power (kW) Right burner power (kW) Pre-set for natural gas	1.90
Front right burner power (kW) Right burner power (kW) Pre-set for natural gas	
Right burner power (kW) Pre-set for natural gas	2.80
Pre-set for natural gas	1.90
CE Marked	
STANDARD ACCESSORIES	
Wok stand <sup>s</sup>	

All models comply with COMMSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring. <sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying. <sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently. <sup>4</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.
<sup>5</sup>For round based pans.

Data valid in this table as of April 2024. Subject to modification without prior notice.

(	2 year warranty	

Gas hob specifications

APPLIANCE TYPE		GAS HOBS	
Design family	iQ 500	iQ 500	iQ 500
Model number	EP9A6SB90	EP7A6QB90	EP6A6HB20
Stainless steel	-	-	-
Black			
DESIGN	,		
Hob surface type	Tempered glass	Tempered glass	Tempered glass
Width (mm)	915	752	590
Control position	Front	Front	Front
Comfort Profile	-	-	-
Can be combined with other models with Comfort Profile	-	-	-
Installation flush with work top possible			
Domino compatible	_	-	-
KEY FEATURES			
stepFlame Technology controls			
Digital power level display		-	_
Number of dual circuit wok style burners <sup>1</sup>	1	1	_
High power (5.0kW+) wok burner <sup>2</sup>	-	_	_
Dual control wok burner <sup>3</sup>	•		_
FEATURES			
Number of cooking zones	5	5	4
Individual power levels	9	9	9
Variable power levels	-	-	
Cast iron pan supports (number)	5	5	4
Cast iron finish pan supports (number)	_	_	-
Dishwasher safe pan supports <sup>4</sup>			
Low profile single piece burners Two piece burners			-
SAFETY FEATURES	-	-	-
	-	-	_
Ignition via control dials	—	_	<b>B</b>
Flame failure safety device	-	•	
PERFORMANCE / TECHNICAL INFORMATION			
Maximum gas power output load (A)	11,500	11,500	8,000
Nominal voltage (V)	220-240	220-240	220-240
Total connected electrical load (max. W)	1.1	1.1	1.1
Cable length (cm)	150	100	100
	-	-	
Left burner power (kW)	4.00	-	-
Left burner power (kW) Front left burner power (kW)		1.00	1.75
Left burner power (kW) Front left burner power (kW) Rear left burner power (kW)	4.00 - -	1.00 1.75	1.75 1.75
Left burner power (kW) Front left burner power (kW) Rear left burner power (kW)	4.00	1.00	1.75
Left burner power (kW) Front left burner power (kW) Rear left burner power (kW) Centre/Centre front burner power (kW)	4.00 - -	1.00 1.75	1.75 1.75
Left burner power (kW) Front left burner power (kW) Rear left burner power (kW) Centre/Centre front burner power (kW) Centre back burner power (kW)	4.00 - - 1.00	1.00 1.75 4.00 - 3.00	1.75 1.75 –
Left burner power (kW) Front left burner power (kW) Rear left burner power (kW) Centre/Centre front burner power (kW) Centre back burner power (kW) Rear right burner power (kW)	4.00 - - 1.00 1.75	1.00 1.75 4.00	1.75 1.75 - -
Left burner power (kW) Front left burner power (kW) Rear left burner power (kW) Centre/Centre front burner power (kW) Centre back burner power (kW) Rear right burner power (kW) Front right burner power (kW)	4.00 - - 1.00 1.75 3.00	1.00 1.75 4.00 - 3.00	1.75 1.75 - - 3.50
Left burner power (kW) Front left burner power (kW) Rear left burner power (kW) Centre/Centre front burner power (kW) Centre back burner power (kW) Rear right burner power (kW) Front right burner power (kW)	4.00 - - 1.00 1.75 3.00 1.75	1.00 1.75 4.00 - 3.00 1.75	1.75 1.75 - - 3.50 1.00
GB plug Left burner power (kW) Front left burner power (kW) Rear left burner power (kW) CentreiCentre front burner power (kW) Centre back burner power (kW) Rear right burner power (kW) Front right burner power (kW) Right burner power (kW) Pre-set for natural gas CE Marked	4.00 - - 1.00 1.75 3.00 1.75 -	1.00 1.75 4.00 - 3.00 1.75 -	1.75 1.75 - - 3.50 1.00 -
Left burner power (kW) Front left burner power (kW) Rear left burner power (kW) Centre/Centre front burner power (kW) Rear right burner power (kW) Front right burner power (kW) Right burner power (kW) Pre-set for natural gas	4.00 - - 1.00 1.75 3.00 1.75 -	1.00 1.75 4.00 - 3.00 1.75 -	1.75 1.75 - - 3.50 1.00 -
Left burner power (kW) Front left burner power (kW) Rear left burner power (kW) Centre/Centre front burner power (kW) Centre back burner power (kW) Rear right burner power (kW) Front right burner power (kW) Right burner power (kW) Pre-set for natural gas CE Marked	4.00 - - 1.00 1.75 3.00 1.75 -	1.00 1.75 4.00 - 3.00 1.75 -	1.75 1.75 - - 3.50 1.00 -

2 year warranty

■ Yes, model has this feature. – Feature not available for this model. All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring. <sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying. <sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently. <sup>4</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel. <sup>5</sup>Eor crued based page

<sup>5</sup>For round based pans.

Data valid in this table as of April 2024. Subject to modification without prior notice.









2 year warranty

28-30 / 37mbar



2 year

28-30 / 37mbar

APPLIANCE TYPE GAS HOBS Design family iQ 500 iQ 300 iQ 300 Model number EC7A5RB90 EG7B5QB90 EG6B5PB90 Stainless steel Black DESIGN Hob surface type Metal Metal Metal Width (mm) 750 750 580 Control position Front Front Front Comfort Profile Can be combined with other models with Comfort Profile Installation flush with work top possible Domino compatible KEY FEATURES stepFlame Technology control Digital power level display Number of dual circuit wok style burners High power (5.0kW+) wok burner<sup>2</sup> Dual control wok burner<sup>3</sup> FEATURES Number of cooking zones 5 Individual power levels 9 Variable power levels Cast iron pan supports (number) Cast iron finish pan supports (number) 2 Dishwasher safe pan supports<sup>4</sup> Low profile single piece burners Two piece burners SAFETY FEATURES Ignition via control dials Elame failure safety device PERFORMANCE / TECHNICAL INFORMATION 11,500 10.800 7.500 Maximum gas power output load (A) Nominal voltage (V) 220-240 220-240 220-240 Total connected electrical load (max. W) 1.1 1.1 1.1 100 150 100 Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) 1.00 1.00 1.75 Rear left burner power (kW) 1.75 1.75 1.75 Centre/Centre front burner power (kW) 5.00 3.30 Centre back burner power (kW) 3.00 Rear right burner power (kW) 3.00 3.00 1.75 1.00 Front right burner power (kW) 1.75 Right burner power (kW) Pre-set for natural gas 

Wok stand<sup>5</sup> LPG jets

Yes, model has this feature. – Feature not available for this model.

and off mode electric power consumption.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring.

<sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying.

<sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently. <sup>4</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.

<sup>5</sup>For round based pans.

CE Marked

STANDARD ACCESSORIES

Gas hob

specifications

Data valid in this table as of April 2024. Subject to modification without prior notice.

APPLIANCE TYPE	GAS HOB
Design family	iQ 100
Model number	EB6B5PB60
Stainless steel	
Black	-
DESIGN	
Hob surface type	Metal
Width (mm)	580
Control position	Right side
Comfort Profile	-
Can be combined with other models with Comfort Profile	-
Installation flush with work top possible	-
Domino compatible	-
KEY FEATURES	
stepFlame Technology controls	_
Digital power level display	-
Number of dual circuit wok style burners <sup>1</sup>	-
High power (5.0kW+) wok burner <sup>2</sup>	-
Dual control wok burner <sup>3</sup>	-
FEATURES	
Number of cooking zones	4
Individual power levels	-
Variable power levels	
Cast iron pan supports (number)	-
Cast iron finish pan supports (number)	2
Dishwasher safe pan supports <sup>4</sup>	-
Low profile single piece burners	-
Two piece burners	
SAFETY FEATURES	
Ignition via control dials	
Flame failure safety device	
PERFORMANCE / TECHNICAL INFORMATION	
Maximum gas power output load (A)	7,400
Nominal voltage (V)	220-240
Total connected electrical load (max. W)	0.8
Cable length (cm)	100
GB plug	_
Left burner power (kW)	-
Front left burner power (kW)	3.00
Rear left burner power (kW)	1.70
Centre/Centre front burner power (kW)	-
Centre back burner power (kW)	-
Rear right burner power (kW)	1.70
Front right burner power (kW)	1.00
Right burner power (kW)	_
Pre-set for natural gas	
CE Marked	
STANDARD ACCESSORIES	
Wok stand <sup>5</sup>	_
LPG jets	28-30 / 37mbar
•	

Yes, model has this feature. – Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring.

<sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying. <sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently. <sup>4</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.

<sup>5</sup>For round based pans.

Data valid in this table as of April 2024. Subject to modification without prior notice.



2 year

#### Gas hob specifications

For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. 108 For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

28-30 / 37mbar

Gas hobs | Hobs

### Domino hobs

#### iQ 700 ET475FYB1E

flexInduction domino hob Stainless steel



Domino flexInduction hob pecifications		
APPLIANCE TYPE	FLEXINDUC	
Design family		
Model number	EX375FXB	
DESIGN		
Hob surface type	Ceramic gl	ass
Width (mm)	392	
Control position	Front	
Control type Style	touchSlide S/steel side trim with	
KEY FEATURES	S/steel side thin with	I IIOIIL Devei
Home Connect		
Hob hood control		
perfectCook temperature sensor ready		
perfectFry Sensor settings		
Extended flexInduction zone		
Number of flexInduction zones Number of combiZones		
HOB FEATURES		
Number of individual zones		
Power Levels		
powerBoost		
panBoost		
MoveMode		
Energy consumption display		
Keep warm function Ouick start function	-	
Restart function		
Automatic setting transfer		
Dish categories		
"Plug&Play" with GB Plug		
Wipe protection function		
SAFETY FEATURES		
Residual heat indicator		
Childproof lock Switch off timer		
Safety time switch off		
Countdown timer		
Count up timer		
Pan recognition		
Main on/off switch		
PERFORMANCE / TECHNICAL INFORMATION		
Maximum power output (W) Nominal voltage (V)	3,700	
Electrical cable length (cm )	110	
Rear centre zone – power (kW) / diameter (mm)	2.20	210x200
Front centre zone – power (kW) / diameter (mm)	2.20	210x200
Middle centre zone – power (kW) / diameter (mm)		
Rear centre zone – with powerBoost (max. kW)	3.70	
Front centre zone – with powerBoost (max. kW)	3.70	
Middle centre zone - with powerBoost (max. kW) OPTIONAL ACCESSORIES		
Connecting link for use with side trim hobs	HEZ39430	
Set of three pans	HZ9SE03	
Four piece pan set	HZ9SE04	
Six piece pan set	HZ9SE06	
Cast Iron non-stick frying pan, base diameter 185mm	HZ9FE28	
Griddle plate, approx. 40x20 cm for use with Flex Induction	HZ39052	
Teppan yaki, approx. 40x20 cm for use with Flex Induction	HZ39051	
Oval roasting dish with lid for use with induction hobs	HZ39001	
Steamer insert for use with HZ390011 roasting dish	HZ39001	2

2 year warranty

APPLIANCE TYPE	WOK DOMINO GAS HOB
Design family	iQ 700
Model number Black	ER3A6AB70
DESIGN	
Width (mm)	302
Control position	Front
KEY FEATURES	
stepFlame Technology controls	
Digital power level display	-
Number of dual circuit wok style burners <sup>1</sup>	1
High power (5.0kW+) wok burner <sup>2</sup>	
Dual control wok burner <sup>3</sup>	
Hob surface type	Ceramic glass
FEATURES	
Number of cooking zones	1
Individual power levels	9
Variable power levels	_
Cast iron pan supports (number)	1 x dishwasher safe
Cast iron finish pan supports (number)	_
Low profile single piece burners	
Two piece burners	-
Comfort Profile	
Can be combined with other models with Comfort Profile	
Installation flush with work top possible	_
SAFETY FEATURES	
SAFETY FEATURES	B
SAFETY FEATURES Ignition via control dials	
SAFETY FEATURES Ignition via control dials Flame failure saefty device	
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE / TECHNICAL INFORMATION	
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (W)	6,100
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (W) Nominal voltage (V)	<b>6</b> ,100 220-240
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (W) Nominal voltage (V) Total connected electrical load (max. W)	■ 6,100 220-240 1.1
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (W) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm)	■ 6,100 220-240 1.1 100
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE/TECHNICAL INFORMATION Maximum gas power output load (W) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug	■ 6,100 220-240 1.1 100
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (W) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW)	■ 6,100 220-240 1.1 100
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (W) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW)	■ 6,100 220-240 1.1 100
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (W) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) Gab lug Left burner power (kW) Front left burner power (kW) Back left burner power (kW)	6,100 220-240 1.1 100 - - - - -
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (W) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Back left burner power (kW) Centre/Centre front burner power (kW)	6,100 220-240 1.1 100 - - - - -
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (W) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Back left burner power (kW) Centre/Centre front burner power (kW) Centre back burner power (kW)	6,100 220-240 1.1 100 - - - - -
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE/TECHNICAL INFORMATION Maximum gas power output load (W) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Centre/Centre front burner power (kW) Centre back burner power (kW) Front right burner power (kW)	6,100 220-240 1.1 100 - - - - -
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE/TECHNICAL INFORMATION Maximum gas power output load (W) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Centrel/Centre front burner power (kW) Centre/Centre front burner power (kW) Front right burner power (kW) Back right burner power (kW) Back right burner power (kW)	6,100 220-240 1.1 100 - - - - -
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (W) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Centrel/Centre front burner power (kW) Centrel/Centre front burner power (kW) Front tight burner power (kW) Back right burner power (kW) Right burner power (kW)	6,100 220-240 1.1 100 - - - 6.10 - - - - - - - - - - - - - - - - - - -
SAFETY FEATURES           Ignition via control dials           Flame failure saefty device           PERFORMANCE / TECHNICAL INFORMATION           Maximum gas power output load (W)           Nominal voltage (V)           Total connected electrical load (max. W)           Cable length (cm)           GB plug           Left burner power (kW)           Front left burner power (kW)           Centre/Centre front burner power (kW)           Centre back burner power (kW)           Back right burner power (kW)           Back right burner power (kW)           Pront right burner power (kW)           Preset for natural gas	<ul> <li>6,100</li> <li>220-240</li> <li>1.1</li> <li>100</li> <li>-</li> <li>-</li> <li>-</li> <li>6.10</li> <li>-</li> <li>-</li></ul>
SAFETY FEATURES Ignition via control dials Flame failure saefty device PERFORMANCE / TECHNICAL INFORMATION Maximum gas power output load (W) Nominal voltage (V) Total connected electrical load (max. W) Cable length (cm) GB plug Left burner power (kW) Front left burner power (kW) Back left burner power (kW) Centre/Centre front burner power (kW) Front right burner power (kW) Front right burner power (kW) Back right burner power (kW) Right burner power (kW) Right burner power (kW) Pre-set for natural gas CE Marked	<ul> <li>6,100</li> <li>220-240</li> <li>1.1</li> <li>100</li> <li>-</li> <li>-</li> <li>-</li> <li>6.10</li> <li>-</li> <li>-</li></ul>
SAFETY FEATURES           Ignition via control dials           Flame failure saefty device           PERFORMANCE / TECHNICAL INFORMATION           Maximum gas power output load (W)           Nominal voltage (V)           Total connected electrical load (max. W)           Cable length (cm)           G& plug           Left burner power (kW)           Front left burner power (kW)           Centre/Centre front burner power (kW)           Centre back burner power (kW)           Front right burner power (kW)           Right burner power (kW)           Pront right burner power (kW)           Pront right burner power (kW)           Centre forn taural gas           CE Marked           STANDARD ACCESSORIES	6,100     220-240     1.1     100     -     -     -     6.10     -     -     6.10     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -     -
SAFETY FEATURES           Ignition via control dials           Flame failure saefty device           PERFORMANCE/TECHNICAL INFORMATION           Maximum gas power output load (W)           Nominal voltage (V)           Total connected electrical load (max. W)           Cable length (cm)           GB plug           Left burner power (kW)           Front left burner power (kW)           Centre/Centre front burner power (kW)           Centre/Centre front burner power (kW)           Back right burner power (kW)           Pront right burner power (kW)           Pre-set for natural gas           CE Marked           STANDARD ACCESSORIES           Wok stand <sup>a</sup>	<ul> <li>6,100</li> <li>220-240</li> <li>1.1</li> <li>100</li> <li>-</li> <li>-</li> <li>-</li> <li>6.10</li> <li>-</li> <li>-</li></ul>
SAFETY FEATURES         Ignition via control dials         Flame failure saefty device         PERFORMANCE/TECHNICAL INFORMATION         Maximum gas power output load (W)         Nominal voltage (V)         Total connected electrical load (max. W)         Cable length (cm)         GB plug         Left burner power (kW)         Front left burner power (kW)         Centre/Centre front burner power (kW)         Front right burner power (kW)         Front right burner power (kW)         Preset for natural gas         CE Marked         STANDARD ACCESSORIES         Wok stand <sup>6</sup> LPG jets	<ul> <li>6,100</li> <li>220-240</li> <li>1.1</li> <li>100</li> <li>-</li> <li>-</li> <li>-</li> <li>6.10</li> <li>-</li> <li>-</li></ul>

2 year warranty

Yes, model has this feature. – Feature not available for this model. res, model nas this reature. - reature not available for this model.
 All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.
 <sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring.
 <sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying.
 <sup>3</sup>Dual control means the inner and outer rings of a dual circuit burrner can be controlled independently.

<sup>4</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.

Domino gas hob

specifications

For orund based pans. Data valid in this table as of April 2024. Subject to modification without prior notice.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring. <sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying. <sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently. <sup>4</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.

<sup>5</sup>For round based pans. Data valid in this table as of April 2024. Subject to modification without prior notice.

For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. 110

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.


40cm



#### inductionAir Plus venting hobs ED851HQ26E and ED811BS16E


≥ 600

> 600




- D: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.

#### inductionAir Plus venting hob ED711HQ26E



- A: Minimum distance from the hob cut-out to the wall.
- B: Recessing depth.
- C: The worktop into which the hob is installed must withstand loads of approx. 60kg; suitable substructures must be used if required.
- D: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.


#### inductionAir Plus venting hob ED611BS16E




- > 600 600 -490--510

Ducted and unducted ventiliation technical diagrams can be found online

### flexInduction hobs EX975KXW1E and EX975LVV1E

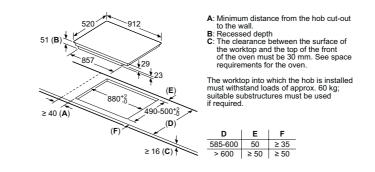


#### flexInduction hobs EX651HEC1E




Ducted and unducted ventiliation technical diagrams can be found online

Ducted and unducted ventiliation technical diagrams can be found online



#### flexInduction hob EX851HVC1E



Measurements in mm. Line drawings are for reference only. Please download the latest installation guidelines from siemens-home.bsh-group.com/uk 112 Siemens cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

See space requirements for the oven


-≥600

- 490

223

≥ 50

#### flexInduction hob EX875KYW1E




- A: Minimum distance from the hob cut-out to the wall.
   B: Recessed depth
   C: The clearance between the surface of the surface surface surface of the surface sur
- een the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if reauired

D	Е	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50


#### flexInduction hob EX275HXC1E




- A: Recessed depth
- B: Min. distance from the hob cut-out to the wal
- C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm

See space requirements for the oven

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required

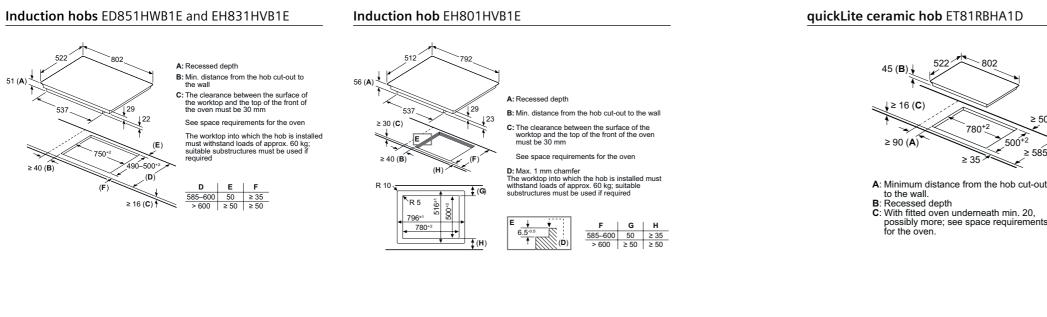

#### Induction hob EH601HEB1E



522

51 (B)

≥ 16 (C)

> 40 (A

#### A: Recessed depth B: Min. distance from the hob cut-out to the wall C: With fitted oven underneath min, 30 mm. possibly more See space requirements for the over

A: Minimum distance from the hob cut-out to the wall.
 B: Recessed depth
 C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed

must withstand loads of approx. 60 kg; suitable substructures must be used

| E | F

 585-600
 50
 ≥ 35

 > 600
 ≥ 50
 ≥ 50


D

D: Max. 1 mm chamfer




Induction hobs EU611BEB5E and EU611BEB5B


### ≥ 16 (**B**) ≥ 40 (Á




### Induction hobs ED651HSB1E and EH631HEB1E

#### Induction hob EU61RAGA5B






the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven. The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used




if required.



possibly more; see space requirements


#### quickLite ceramic hob ET61RCEA1E




A: Minimum distance from the hob cut-out to the wall. B: Recessed depth C: With fitted oven underneath min. 20, possibly more; see space requirements for the oven.

#### For all flexInduction, induction and quickLite ceramic hobs

Below are diagrams for installation applicable to all flexInduction, induction and quickLite ceramic hobs

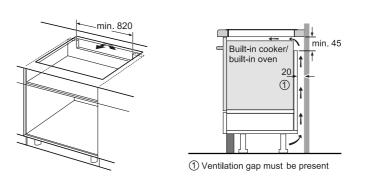


#### quickLite hob ET61RBEA1E





A: Minimum distance from the hob cut-out to the wall.


B: Recessed depth C: With fitted oven underneath min. 20, possibly more; see space requirements for the oven.




#### Gas hob ER9A6SB70















#### Gas hob EP7A6QB90






#### Gas hob EP6A6HB20






Wok domino gas hob ER3A6AB70


#### Gas hobs EC7A5RB90 and EG7B5QB90




#### Gas hob EG6B5PB90



#### flexInduction domino hob EX375FXB1E




#### Domino gas hob ER3A6BB70



#### Domino hob combination installation

Below are diagrams showing the possible combinations for installing your Domino hob

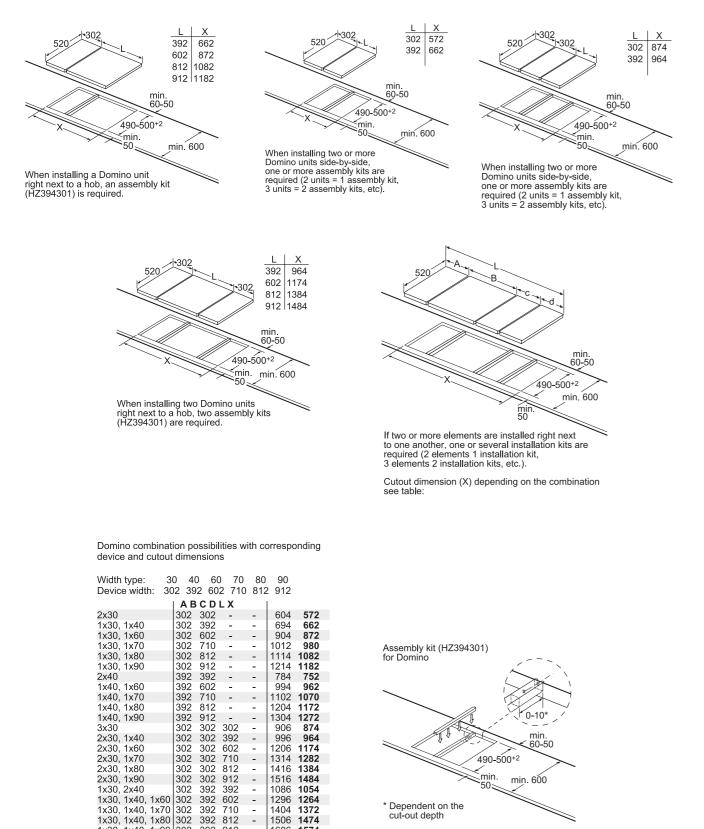

min

\* Dependent on the cut-out depth

min. 600

Measurements in mm. Line drawings are for reference only. Please download the latest installation guidelines from siemens-home.bsh-group.com/uk 118 Siemens cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

1086 **1054** 1296 **1264** 1404 **1372** 1506 **1474** 

-

-

 $\begin{smallmatrix} 0 & 302 & 392 & 812 & - & 1506 & 1474 \\ 392 & 392 & 912 & - & 1606 & 1574 \\ 392 & 392 & 392 & - & 1176 & 1144 \\ 392 & 392 & 602 & - & 1386 & 1354 \\ 302 & 302 & 302 & 302 & 302 & 1208 & 1176 \\ 302 & 302 & 302 & 392 & 392 & 1298 & 1266 \\ 302 & 302 & 392 & 392 & 392 & 1478 & 1446 \\ \end{smallmatrix}$ 

 1x30, 1x40, 1x90
 302
 392
 912

 3x40
 392
 392
 392

3x40 2x40, 1x60 4x30 3x30, 1x40 2x30, 2x40 1x30, 3x40

Technical diagrams | Hobs

# Outstanding performance, intelligently designed

The kitchen is the heart of the home. Not only is it a place to cook, it is also a place to entertain, relax after a hard day's work, or spend time with friends and family.

Our range of hoods offer sleek designs and innovative features to elevate the kitchen. From ceiling hoods to glassdraftAir hoods, we have stylish options to suit any taste. The quiet and energy efficient motors, available on some Siemens hoods create a comfortable cooking environment.

Siemens hoods keep the kitchen space fresh, and air cleaner whilst also providing ambient lighting. Browse through intelligent ventilation solutions for all kitchen designs. Our venting hobs with inductionAir Plus combines an advanced induction hob with a high-performance extractor for even clearer views in the kitchen. See the hobs section for details on the inductionAir Plus (pages 98-99).



Siemens hood warranties:



2 year warranty A two year warranty is available on all Siemens hoods listed in this brochure to protect against manufacturing and material faults during this warranty period.


> To find out more about warranty and for registration, please visit: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties

## Installation solutions for every kitchen

Worktop installation.

glassdraftAir and inductionAir Plus ventilation.





The perfect solution for keeping kitchen designs clear and with unhindered sightlines. The stylish glassdraftAir premium glass panel retracts fully into the unit when not in use. When in operation, its unique transparent design adds a subtle highlight to the kitchen, while its innovative Guided Air technology guarantees excellent performance from all cooking zones.

For seamless installation combine the LD98WMM60B glassDraft Air with the EX975KXW1E or EX975LVV1E flexInduction hobs using the LZ29WWY12 seamless installation kit.



The perfect combination of innovation and functionality. These appliances offer double the efficiency and convenience by integrating a cooktop and ventilation system into one product. Ideal for kitchens with limited space or for customers seeking a clean and unique look.



#### Wall installation.

Decorative angled glass and chimney hoods.



Experience the beauty and effectiveness of Siemens' wall-mounted ventilation solutions. Our designs are not only stylish but also highly effective with a host of intelligent features. Want a ventilation solution that combines classic and contemporary elements? Explore our traditional chimney hoods.

Integrated furniture installation.

Integrated, telescopic and canopy hoods.

Need to seamlessly integrate the hood into wall-mounted kitchen units? We offer a variety of options specifically designed for mounting inside a cupboard space. These concealed hoods are the perfect choice for achieving a sleek and modern kitchen design.



LB78574GB canopy hood











# Hood installation options


#### Ducted or recirculated?

For optimum performance, the extractor hood should be ducted to the outside of the house, so that the extracted air is vented outside. But sometimes this is not practical, so most Siemens hoods can also operate in recirculating mode; where the air is passed through a metal filter to remove grease, and then through a carbon filter to remove odours before being directed back into the kitchen.

Although the extraction rate is usually slightly lower when using this method than ducted extraction and the carbon odour filter will need to be replaced, recirculating the air offers an energy efficient benefit; cool air is retained in the home in the summer and warm air does not vent out during winter months.

#### **Ducted Ventilation**

- Extracts steam and odours • Effective planning of ducting system required
- **Recirculated Ventilation**
- Removes over 90% of odours with cleanAir filters
- Easy to install no ducting required
- Separate recirculation kit required

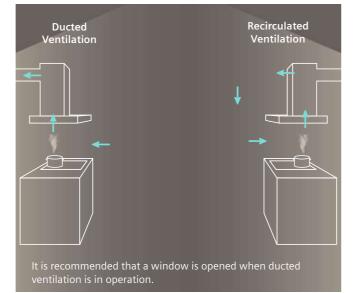

#### The power to perform.

A great hood must be powerful enough to effectively remove moisture and cooking odours from a kitchen. We recommend the hood should be able to change the air in the kitchen 6-12 times per hour. Using this quick calculation, you can check whether a hood is sufficiently powerful. Firstly, calculate the volume of the kitchen (HxWxD metres). Next multiply that figure by 12. The resulting figure is the ideal extraction rate required in intensive mode. Match this to a lower power level on the hood to avoid having to run at full power for increased efficiency.

#### FOR EXAMPLE

**Room:** 4m x 4m x 2.5m = 40m<sup>3</sup>

12 changes per hour in intensive operation: 12 x 40m<sup>3</sup> = 480m<sup>3</sup>/h

So the hood must achieve >480m<sup>3</sup>/h in intensive mode.

#### Recirculation filters.



area, Up to 3dB (A) sound

reduction, improved

extraction and performance Anti-fish treatment

standard high performance or regenerative	STANDARD ODOUR FILTER	CLEANAIR FILTER*
Lifetime	6-12 months	6-12 months
Benefits	Simple installation, Anti-fish treatment	Increased surface area, Up to 3dB (A) sound reduction, improved extraction and performance, Anti-fish treatment

\*CleanAir and Regenerative filters are not available for all styles of hood. Additional module may be required to house the filter. Images for example only, different filters may come in a different size and style.

#### State-of-the-art efficiency with the iQ drive motor.



Siemens hoods feature innovative technology that saves energy. This is thanks to the highly efficient, durable brushless iQdrive motor which is powerful, but requires very little energy to run. Capable of handling odours and grease in the most challenging cooking situations, and specially designed to last longer. The brushless iQdrive motor at the heart of our selected hoods is capable of extracting a measured value of up to 1007m<sup>3</sup>/h in our most powerful hood\*. \*LC91KLT60B





(2 hours, 200°C),

Improved extraction

performance

# Intelligent angled hoods, clean air and quiet moments

Our new range of iQ300 and iQ700 angled hoods and touchSlider hobs work tirelessly in the background to remove distractions, eliminate errors and enhance the cooking experience.

Designed for maximum flexibility and control, and true to the distinctive Siemens design – our intelligent hobs and hoods make cooking more intuitive by automatically adjusting to the cookware, adapting to user preferences, and automating tasks. When cooking, greasy fumes and loud noises can make it difficult to concentrate or have a conversation. The powerful, quiet and energy-efficient angled hoods allow delicious meals to be prepared, free from disturbance.



#### intelligent hood automatic

The hood matches the fan level to the temperature and power of the hob, empowering consumers to cook from start to finish without ever touching the hood. Simply pairing both appliances with the Home Connect app allows users to benefit from this automated cooking feature. Intelligent hood automatic is available on all new touchSlider induction hobs in combination with our new iQ300, and iQ700 angled hoods.



#### Favourite button

The favourite button personalises the cooking experience, with just one tap. When connected to the Home Connect app, the favourite button can be programmed to perform a chosen action. Whether it is activating a specific heat and timer setting, switching on hood lighting, or turning on other connected appliances and devices using IFTTT.



#### using if i i i.

**iQdrive** Thanks to the low-friction mechanics of the iQdrive motor, the iQ300 and iQ700 angled hoods are not only extremely powerful and durable, but virtually silent too. The same level of performance for extraction and quietness can be achieved in both recirculation and exhaust modes.

#### climateControl Sensor: iQ700 hoods

The climateControl Sensor in the hood detects steam and odours and adjusts the extraction rate precisely as needed, switching off once cleared. This ensures the air in the kitchen stays grease and odour free, in the most energy efficient way.



V

#### LED Lighting

The cooking area can be personalised depending on mood or preference with the LED Lighting Temperature. The hoods lights can be adjusted to the desirable warmth or coolness without having to sacrifice on lighting quality. An array of colour temperatures between warm white (2700k) and cool white (500k) can be selected via the hoods settings in the Home Connect app.



Have it your way with Home Connect.

Intelligent connectivity gives more control, support and freedom. Whether it is getting a notification on a smartwatch when dinner is ready, lowering the heat on the hob via a smartphone or tablet, or asking the smart assistant speaker (Amazon Alexa or Google Assistant) to turn off the hob while the table is being set, Home Connect gives access to more flexibility and more ways to personalise the kitchen.

Some of the features displayed can be accessed only if the device is connected to a Home Connect Account and a SingleKey ID account via the Internet. Home Connect is a service of Home Connect GmbH. For more information on Home Connect, visit www.home-connect.com/gb/en





#### Decibel output

60dB Normal conversation 59dB Hood on recirculation mode\*





\* Decibel output of iQ700 hoods on level 3.

#### Accessories for recirculation

Compatible Recirculation Kits: IQ 300 LC67KFN60B - 60cm			
VIB	ACCESSORY		
LZ11BKI16	cleanAir Plus Recirculation Kit		
LZ11BKV16	cleanAir Plus Recirculation Kit – Chimless		
Replacement Filters			
LZ11BKB16	cleanAir Plus Replacement Filter		

Compatible Recirculation Kits: 10300 LC87KFN60B - 80cm				
VIB	ACCESSORY			
LZ11BKI16	cleanAir Plus Recirculation Kit			
LZ11BKV16	cleanAir Plus Recirculation Kit – Chimless			
Replacement Filters				
LZ11BKB16	cleanAir Plus Replacement Filter			

51dB Hood on exhaust mode\*











Compatible Recirculation Kits: 10700 LC91KLT60B – 90cm		
VIB	ACCESSORY	
LZ11BKI16	cleanAir Plus Recirculation Kit	
LZ11BKV16	cleanAir Plus Recirculation Kit – Chimless	
LZ11BKS11	Long Life Recirculation Kit	
LZ11BKR11	Long Life Recirculation Kit – Chimless	
Replacement Filters		
LZ11BKB16	cleanAir Plus Replacement Filter	
LZ11BKP11	Long Life Replacement Filter	

# with one.

Experience a new level of cooking efficiency with our intelligent features that effortlessly connect the hob and the hood, creating a seamless cooking experience.






#### Intelligent hood automat



# **Completely** automatic ventilation

SIEMENS

# Control two appliances



Control the hood's power levels and lighting directly from the hob after pairing both appliances via Home Connect. On top of this, once the hob is switched on, the hood will start automatically.



#### climateControl sensor


The climateControl sensor automatically adjusts the power level of the hood depending on the level of steam and odours in the air – keeping the kitchen fresher without having to manually adjust the power. The climateControl Sensor is activated by selecting the 'auto' button.

#### Intelligent Hood Automatic

Experience seamless interaction between the hob and the hood. By pairing both appliances with the Home Connect app, automated cooking and ventilation solutions are enjoyed. The hood adjusts its fan level based on the hob's output, eliminating the need for manual control. This intuitive feature is available on our new touchSlider induction hobs, with iQ300 and iQ700 angled hoods. The hob and the hood communicate throughout the cooking process, enabling the hood to automatically adjust the extraction rate as heat is added or removed. However, manual adjustment of the fan speed and light settings is still available. Once cooking is complete, the hood switches to the automatic after run function, which can be customised through the Home Connect app.



Model shown left and above: LC91KLT60B angled glass chimney hood

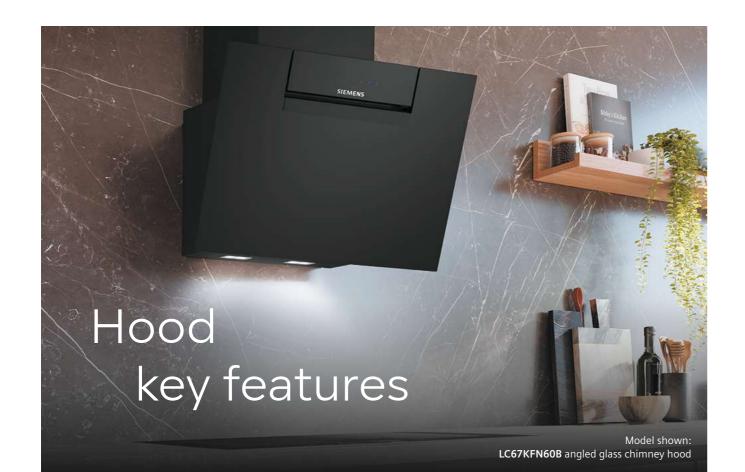


#### Smart hoods make cooking a breeze.

#### Home Connect

Experience more versatile ways of cooking with Siemens hoods that have Home Connect. Easily control the lighting, power level, and run time of the hood via a smartphone, tablet or smartwatch.

Take connected cooking a step further to control hood settings with Amazon Alexa voice control. For example, ask Alexa how to clean the filter, set the ambient lights or start extraction. All these features also work with Google Home, making it simple to control appliances in every kitchen. With the Home Connect app, the climateControl sensor can be activated so that the hood's extraction rate automatically adjusts depending on the level of steam and odours in the kitchen.

The cookConnect system enables connection of the hob and the hood through the Home Connect app for more convenient control. This feature allows hood settings to be changed from the hob, so there is complete control from just one appliance.





#### Other lighting options.





LED Illumination All Siemens hoods are equipped with state-of-the-art LED lighting, ensuring the hob is illuminated evenly and clearly.

#### Controlling your hood.



Home Connect and voice control Activate and control connected hoods by using the Home Connect app or via voice control with Amazon Alexa or Google Home to take the connected cooking experience to the next level.



#### touchControl The design of touchControl is integrated into the black glass panel for easy control at the touch of a button. Its sleek design is not only aesthetically pleasing but also enables easy cleaning.



### cookConnect system Control the hood's power levels and lighting

directly from the hob after pairing both appliances via Home Connect. On top of this, once the hob is switched on, the hood will start automatically.



### touchSlider

Stunning design meets sleek control with touchSlider. Control Siemens hoods with ease by simply sliding a finger along the touchSlider to select the power level.

#### Other product features.



#### Hood Width

Siemens offers a wide range of hoods to fit different sized spaces. For optimal results, the cooker hood should be at least as wide as the hob. Our hood widths range from 370-520mm.

#### Intensive setting

Width

The intensive setting creates a powerful boost of extraction, perfect for tackling demanding dishes such as stir fry or steamed vegetables. This ensures moisture is properly eradicated without misting windows and the kitchen air is kept fresh.

#### Interval Operation

With interval ventilation, the hood switches on automatically at the lowest level for 10 minutes every hour, to keep the air in the kitchen refreshed. The interval ventilation switches off after 24 hours.



#### softLight with Dimmer

Allows dimming of the hood lights. Perfect for when cooking is finished and a subtle glow in the kitchen is desired.





#### Energy efficient hoods\*

Siemens hoods feature innovations that make them incredibly energy efficient to run, from our durable and quiet brushless iQdrive motor to LED lighting.

\*For individual product energy efficiency ratings please check individual product specifica


#### Automatic after running time

This convenient feature reduces cooking odours by allowing the extractor to carry on running automatically after cooking has finished. It will run at a low speed for 3-30 minutes - the duration the extractor carries on for depends on the model.


#### Filter Saturation Indicator System

The filter saturation indicators use an illuminated symbol on the hood to show when the hood's grease filters need to be cleaned. For hoods installed with a recirculation filter, the saturation indicator will also signal when the recirculation filter should be replaced or regenerated (depending on type of filter installed).

### Core Hoods and Venting Hobs product overview

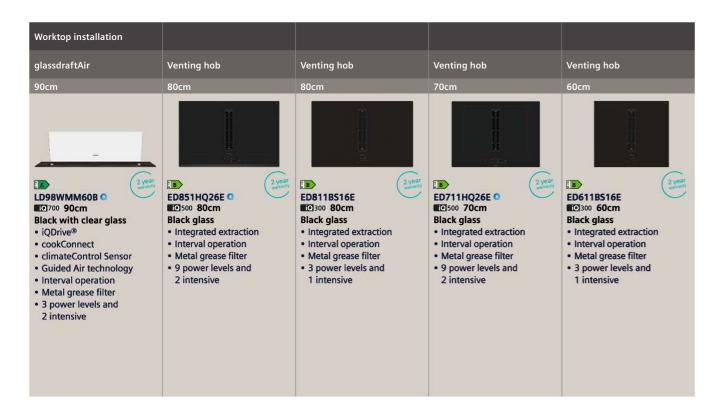



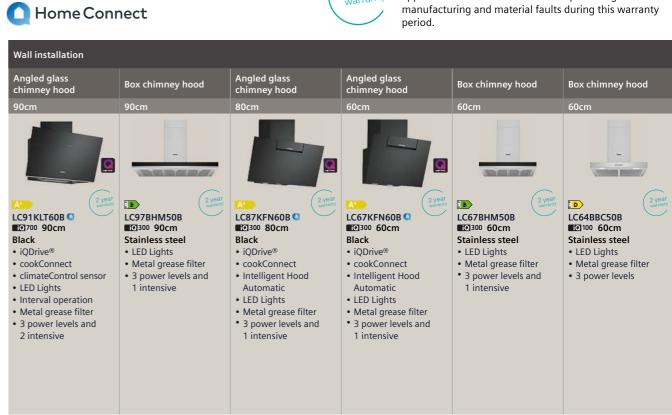





#### 2 year warranty


A two year warranty is available on all Siemens hood appliances listed in this brochure to protect against



### Worktop ventilation

#### iQ 700 LD98WMM60B

glassdraftAir Hood Black with clear glass

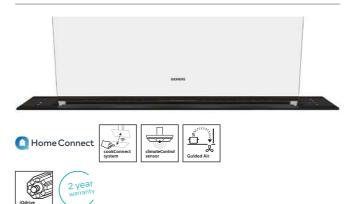


### The finishing touch for your kitchen. Now with flexible installation.

Extract cooking smells at source with the iQ700 glassdraftAir hood, ideal for keeping the sightlines of open plan kitchens. Conveniently placed within the worktop, this elegant hood can be automatically raised when needed, then disappears at the touch of a button. There is no need to worry about losing storage space beneath as the motor can be placed somewhere more convenient with the remote installation kit.

The Siemens Remote Motor Installation Mounting Kit (LZ21WWM11) frees up space under the worktop and provides the option to mount the motor up to 3 metres away from the appliance. Image for illustrative purposes only. Ducting not supplied.



Model shown: LD98WMM60B glassdraftAir hood

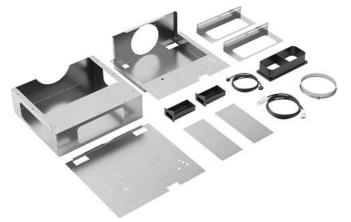



Scan to view installation options

Siemens glassdraftAir hood and hob compatibility guide				
Hood	Hob compatibilty	Seamless In		
10,700 LD98WMM60B 90cm glassdraftAir hood	iQ700 EX975KXW1E flexInduction hob	LZ29WWY12		
10700 LD98WMM60B 90cm glassdraftAir hood	Q700 EX975LVV1E flexInduction hob	LZ29WWY12		

For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999. 2 year warranty

Home Connect

glassdraftAir Hood	-
specifications	A-22
APPLIANCE TYPE	GLASSDRAFTAIR HOOD
Width	90cm
Design family	iQ 700
Model number	LD98WMM60B
Colour	Black with clear glass
KEY FEATURES	
Seamless installation to hob available (check compatibility)	
Home Connect	
Guided Air	•
emotionLight Pro	-
climateControl sensor	•
cookConnect hob based hood control	
iQdrive®	•
Intensive setting / Automatic intensive revert <sup>1</sup>	■/■
Filter saturation indicator	
Filter service position	•
FEATURES	
Suitable for ducted / recirculating operation	■/■
Power levels	3 + 2 intensive
Interval operation	•
Automatic after running (minutes)	10
Lighting	-
Type of control	Touch control
PERFORMANCE / TECHNICAL INFORMATION	
Energy rating	A
Appliance width (mm)	912
Extraction Rate in m <sup>3</sup> /h <sup>2,3</sup>	
- ducted / recirculating at power level 3	519/472
- ducted / recirculating at power level 4 or intensive setting 1	656 / 543
- ducted / recirculating, intensive setting or intensive setting 2	833 / 620
Noise level (sound power) based on dB [A] re 1pW 2,4	
- ducted / recirculating at power level 3	62 / 65
- ducted / recirculating at power level 4 or intensive setting 1	67 / 68
- ducted / recirculating, intensive setting or intensive setting 2	71 / 71
Pipe outlet diameter (mm)	150
Minimum distance above an electric / gas hob <sup>5</sup> (mm)	Not compatible

GB plug

Yes, model has this feature. – Feature not available for this model. Power automatically reverts back to normal setting after intensive.

<sup>2</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>3</sup>Measured according to EN61591 on largest pipe diameter. <sup>4</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>5</sup>From top of pan supports.

Data valid in this table as of April 2024. Subject to modification without prior notice.

### inductionAir Plus hobs

#### iQ 500 ED851HQ26E

inductionAir Plus hob Black glass





inductionAir Plus hob specifications		
APPLIANCE TYPE		NAIR PLUS HOB
Design family		Q 500
Model number		51HQ26E
DESIGN		
Width (mm)		802
Control position / Control type	Front /	touchSlider
Style	U	-bevel
KEY FEATURES		
Home Connect		
Integrated extractor		
cookingSensor Plus ready <sup>1</sup>		
fryingSensor Plus settings for hob	11	I levels
Favourite Button Automatic extraction		uto-on
Number of flexInduction zones	A	ulo-on
Number of nextradiction zones	2.10	– ft & Right
HOB FEATURES	2.120	it a night
Number of individual zones / Power levels		
powerBoost / powerMove Plus		1-
panBoost		te Button a. sw i
Adaptable volume / Energy consumption display		1-
Keep warm function	via HC/Favourit	te Button a. sw t
quickStart / Quick stop (Quick switch-off)		1-
flexMotion / reStart		-1
Demo mode		
Dish categories/setting recommendations	via HC a	pp a. sw upd.
Wipe protection function (Control panel pause)		
SAFETY FEATURES Residual heat indicator / Pan recognition	_	
Childproof lock / Favourite button		1
Countdown timer / Count up timer		1-
Safety time switch off / Main on/off switch		1
HOOD FEATURES		
HOOD FEATURES climateControl sensor / Metal grease filter		-1
climateControl sensor / Metal grease filter	9 + 2	-1
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control	9+2 6r	- / ■ I Intensive minutes
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation	9+2 6r	– / ■ Intensive ninutes
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation	9 + 2 6 r 12 / 3	- /  Intensive ninutes O minutes
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection	9 + 2 6 r 12 / 3 Yes - 20	- /  Intensive innutes i0 minutes Oml capacity
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector	9 + 2 6 r 12 / 3 Yes - 20 700r	- / D Intensive minutes 0 minutes 0 ml capacity nl capacity
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators	9 + 2 6 r 12 / 3 Yes - 20 700r	- /  Intensive inutes i0 minutes Oml capacity
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators PERFORMANCE / TECHNICAL INFORMATION – HOB	9 + 2 6 r 12 / 3 Yes - 20 700m	- / Intensive minutes 00 minutes 00 minutes 00 capacity nl capacity - / -
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators PERFORMANCE / TECHNICAL INFORMATION – HOB Maximum power output (W)	9 + 2 6 r 12 / 3 Yes - 20 700n	- /  Intensive minutes minutes mominutes mominutes mominutes n capacity n capacity - 1 - 7,400
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators PERFORMANCE / TECHNICAL INFORMATION – HOB	9 + 2 6 r 12 / 3 Yes - 20 700n	- / Intensive minutes 00 minutes 00 minutes 00 capacity nl capacity - / -
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE/ TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V)	9 + 2 6 r 12 / 3 Yes - 20 700n	- / Intensive ninutes 0 minutes 0 minutes 0 ml capacity 1 capacity - / - 7,400 20-240 110
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators PERFORMANCE / TECHNICAL INFORMATION – HOB Maximum power output (W) Nominal voltage (V) Electrical cable length (cm)	9 + 2 6 r 12 / 3 Yes - 20 700n	- / Intensive ninutes 0 minutes 0 minutes
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators PERFORMANCE / TECHNICAL INFORMATION – HOB Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm)	9 + 2 6 r 12 / 3 Yes - 20 700n 2 2 2.50	- / ■ Intensive minutes ■ Oml capacity nl capacity - I - 7,400 20-240 110 190 x 210 190 x 210
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators PERFORMANCE / TECHNICAL INFORMATION – HOB Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Rear right zone - power (kW) / dimensions (mm)	9 + 2 6 r 12 / 3 Yes - 20 700n 2: 2:50 2.50	- /  Intensive intensive minutes mominutes mom
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators PERFORMANCE/TECHNICAL INFORMATION – HOB Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm)	9 + 2 6 r 12 / 3 Yes - 20 700n 2 2 2.50 2.50 2.50 2.50	- /  Intensive intensive minutes mominutes mom
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) fex fort right zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm)	9 + 2 6 r 12 / 3 Yes - 20 700m 2.50 2.50 2.50 2.50 2.50 - -	- /  Intensive ininutes  Ominutes  Omi capacity I capacity - / -  7,400 20-240 110 190 x 21 1
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) front right zone other - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm)	9 + 2 6 r 12 / 3 Yes - 20 700n 2.50 2.50 2.50 2.50 2.50 - - - - 3.60	- / Intensive ninutes Ominutes Omi capacity - / - 7,400 20-240 110 190 x 211 190 x 210 x 210 190 x 21
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic or manual control Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators PERCOMANCE / TECHNICAL INFORMATION – HOB Maximup ower output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm)	9 + 2 6 r 12 / 3 Yes - 20 700n 2.50 2.50 2.50 2.50 2.50 2.50 2.50 2.50	- / ■ Intensive minutes  Oml capacity al capacity al capacity - / - 7,400 20-240 110 190 × 211 190 × 211 190 × 211 190 × 211 190 × 211 380 × 211 380 × 211
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear right zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) Rear left zone - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) Rear left zone / kear right zone - with powerBoost (max. kW)	9 + 2 6 r 12 / 3 Yes - 20 700n 2.50 2.50 2.50 2.50 2.50 2.50 2.50 2.50	- /  Intensive minutes  Oml capacity al capacity - / -  7,400 20-240 110 190 x 211 380 x 21 3
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic intensive revert setting Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) Rear left zone / Rear right zone - with powerBoost (max. kW) Front left zone / Rear right zone - with powerBoost (max. kW)	9 + 2 6 r 12 / 3 Yes - 20 700n 2.50 2.50 2.50 2.50 2.50 2.50 2.50 2.50	- / ■ Intensive minutes  Oml capacity al capacity al capacity - / - 7,400 20-240 110 190 × 211 190 × 211 190 × 211 190 × 211 190 × 211 380 × 211 380 × 211
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front tight zone - power (kW) / dimensions (mm) flexinduction zone left - power (kW) / dimensions (mm) flexinduction zone right - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) combiZone right - power (kW) / dimensions (mm) Rear left zone / Rear right zone - with powerBoost (max. kW) Front left zone / Front right Zone - with powerBoost (max. kW) PERFORMANCE / TECHNICAL INFORMATION – EXTRACTOR	9 + 2 6 r 12 / 3 Yes - 20 700n 2.50 2.50 2.50 2.50 2.50 2.50 2.50 2.50	- / Intensive minutes 0 minutes 0 m
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic or manual control Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) combiZone right - power (kW) / dimensions (mm) Rear left zone / Rear right zone - with powerBoost (max. kW) <b>PERFORMANCE / TECHNICAL INFORMATION – EXTRACTOR</b> Extractor energy efficiency rating	9 + 2 6 r 12 / 3 Yes - 20 700n 2.50 2.50 2.50 2.50 2.50 2.50 2.50 2.50	- /  Intensive minutes  Oml capacity al capacity - / -  7,400 20-240 110 190 x 211 380 x 21 3
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) front right zone - power (kW) / dimensions (mm) fiexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) combiZone right - power (kW) / dimensions (mm) Rear left zone / Rear right zone - with powerBoost (max. kW) <b>Front left zone / Rear right zone - with powerBoost (max. kW)</b> <b>FRENOMANCE / TECHNICAL INFORMATION – EXTRACTOR</b> Extractor energy efficiency rating <b>Extraction rate in m</b> <sup>1</sup> /h <sup>152</sup>	9 + 2 6 r 12 / 3 Yes - 20 700n 2 2 2.50 2.50 2.50 2.50 2.50 2.50 2.50	- / Intensive minutes 0 minutes 0 minutes 0 minutes 0 minutes 10 minut
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) Rear left zone / Front right zone - with powerBoost (max. kW) PRENGMANCE / TECHNICAL INFORMATION – EXTRACTOR Extractor energy efficiency rating <b>Extractor energy efficiency rating</b>	9 + 2 6 r 12 / 3 Yes - 20 700n 2.50 2.50 2.50 2.50 2.50 2.50   3.60 3.60 3.7 3.7	- / Intensive minutes - / - - / - / - / - / - / - - / - / - / - / - / - / - / - / - / - /
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic intensive revert setting Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) Rear left zone / Rear right zone - with powerBoost (max. kW) <b>PERFORMANCE / TECHNICAL INFORMATION – EXTRACTOR</b> Extraction rate in m <sup>1</sup> /h <sup>6,20</sup> – ducted / recirculating power level minimum – ducted / recirculating power level minimum	9+2 61 12/3 Yes-20 700m : : : : : : : : : : : : : : : : : :	- / Intensive minutes Oml capacity - / - 7,400 20-240 110 190 x 21 190 x 21 190 x 21 190 x 21 190 x 21 190 x 21 0 / 3.70 0 / 3.70 B 4 / 117 10 / 487
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic intensive revert setting Automatic intensive revert setting Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexinduction zone left - power (kW) / dimensions (mm) flexinduction zone right - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) combiZone right - power (kW) / dimensions (mm) Rear left zone / Front right zone - with powerBoost (max. kW) <b>PERFORMANCE / TECHNICAL INFORMATION – EXTRACTOR</b> <b>Extractor</b> energy efficiency rating <b>Extractor</b> energy efficiency rating <b>Extractor</b> in m <sup>1</sup> /h <sup>10,20</sup> – ducted / recirculating power level minimum – ducted / recirculating power level minimum – ducted / recirculating power level intensive	9+2 61 12/3 Yes-20 700m : : : : : : : : : : : : : : : : : :	- /  Intensive minutes  Oml capacity  a capacity  a capacity  - / -  7,400  20-240  110  190 x 21  380 x 21  0 / 3.70  B  4 / 117
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic intensive revert setting Automatic intensive revert setting Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexinduction zone left - power (kW) / dimensions (mm) flexinduction zone right - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) combiZone right - power (kW) / dimensions (mm) Rear left zone / Front right zone - with powerBoost (max. kW) <b>PERFORMANCE / TECHNICAL INFORMATION – EXTRACTOR</b> <b>Extractor</b> energy efficiency rating <b>Extractor</b> energy efficiency rating <b>Extractor</b> in m <sup>1</sup> /h <sup>10,20</sup> – ducted / recirculating power level minimum – ducted / recirculating power level minimum – ducted / recirculating power level intensive	9 + 2 6 r 12 / 3 Yes - 20 700n 2.50 2.50 2.50 2.50 2.50 2.50 3.60 3.60 3.7 3.7 15 50 62	- / Intensive minutes Oml capacity - / - 7,400 20-240 110 190 x 21 190 x 21 190 x 21 190 x 21 190 x 21 190 x 21 0 / 3.70 0 / 3.70 B 4 / 117 10 / 487
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) Rear left zone / Front right zone - with powerBoost (max. kW) <b>PERFORMANCE / TECHNICAL INFORMATION – EXTRACTOR</b> Extractor energy efficiency rating <b>Extractor energy efficiency rating</b> <b>Extractor rate im m<sup>1</sup>/h</b> <sup>(1,2)</sup> – ducted / recirculating power level minimum – ducted / recirculating power level maximum – ducted / recirculating power level maximum – ducted / recirculating power level intensive Noise level (sound power) based on dB[A] re 1pW <sup>(0,4)</sup>	9 + 2 6 r 12 / 3 Yes - 20 700n 2.50 2.50 2.50 2.50 2.50 2.50 2.50 3.60 3.60 3.60 3.60 3.7 3.7 3.7 3.7 4 4	- / Intensive minutes 0 minutes 0 mi
climateControl sensor / Metal grease filter Power levels Automatic intensive revert setting Automatic or manual control Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b> Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) Rear left zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) Rear left zone / Rear right zone - with powerBoost (max. kW) <b>PERFORMANCE / TECHNICAL INFORMATION – EXTRACTOR</b> <b>Extractor energy efficiency rating</b> <b>Extractor energy efficiency rating</b> <b>Extractor energy efficiency rating</b> <b>Extractor is m m/h</b> <sup>G2</sup> - ducted / recirculating power level minimum - ducted / recirculating power level minimum	9 + 2 6 r 12 / 3 Yes - 20 700n 2.50 2.50 2.50 2.50 2.50 2.50 3.60 3.60 3.60 3.7 3.7 3.7 3.7 4 62 4 62	- / Intensive minutes 0 minutes 0 minutes 0 minutes 0 minutes 10 minut

Yes, model has this feature. – Feature not available for this model. All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption. 'Max 3 sensors at any time; one WSP provided. 'Air flow and noise declarations made in line with CECED Code Of Conduct. 'Sound power measured according to EN60704–3 on largest pipe diameter.

Data valid in this table as of April 2024. Subject to modification without prior notice.

#### For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. 136

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

80cm





inductionAir specification
APPLIANCE TYPE
Design family
Model number

		2 year Narranty		e year warranty	2 w	year arranty
	O Hom	ne Connect				
nductionAir Plus hob specifications		u Mes				
	_			AIR PLUS HOBS		
Design family	I	Q 500		Q 300	iQ	300
Nodel number		1HQ26E		11BS16E	ED611	
DESIGN						
Vidth (mm)		710 touchSlider		802 puchControl		92 JchControl
Control position / Control type ityle		meless		meless	Front / tot	
EY FEATURES			110		11011	
lome Connect				-		_
ntegrated extractor						
ookingSensor Plus ready <sup>1</sup>		-		-		
yingSensor Plus settings for hob avourite Button	11	levels		-		-
utomatic extraction	Au	Ito-on	Au	to-On		- o-On
umber of flexInduction zones		-		-		-
umber of combiZones	2: Let	it & Right		1		1
IOB FEATURES umber of individual zones / Power levels		/17		/17		
umber of individual zones / Power levels owerBoost / powerMove Plus		/ 17 / -		/ 17   / -	4 / 17	
anBoost		e Button a. sw upd.		-		
daptable volume / Energy consumption display	I	I-	-	- / -	-	1 -
eep warm function		e Button a. sw upd.	-		-	
uickStart / Quick stop (Quick switch-off)		- / 🖬			■/■	
exMotion / reStart	-	-/  -	-	-/		_
ish categories/setting recommendations	via HC ap	op a. sw upd.		-		_
Vipe protection function (Control panel pause)		-		-		_
AFETY FEATURES						
esidual heat indicator / Pan recognition				1		1
hildproof lock / Favourite button Countdown timer / Count up timer		1		I		/- /-
afety time switch off / Main on/off switch		/=				
OOD FEATURES						
limateControl sensor / Metal grease filter	-	- / 🔳	-	- / 🔳	-	
ower levels		intensive		intensive		itensive
utomatic intensive revert setting utomatic or manual control	6 n	ninutes	6 m	ninutes		nutes
utomatic of manual control utomatic after running: Extraction / Recirculation	12/3	minutes	12/3	minutes		minutes
Iterval operation				•		
ishwasher safe grease filter cassette with spillage collection	Yes - 200	Oml capacity	Yes - 200	Oml capacity	Yes - 200r	nl capacity
ishwasher safe spillage overflow collector		l capacity		l capacity		capacity
lectronic grease filter/cleanAir filter saturation indicators ERFORMANCE / TECHNICAL INFORMATION – HOB		-/-	-	-/-	-	I –
laximum power output (W)	7	,400	7	,400	7,4	100
lominal voltage (V)		0-240		0-240		-240
lectrical cable length (cm)		110		110	1	10
ear left zone - power (kW) / dimensions (mm)	2.50	190 x 210	2.20	190 x 210	2.20	190 x 210
ar right zone - power (kW) / dimensions (mm) ont left zone - power (kW) / dimensions (mm)	2.50	190 x 210 190 x 210	2.20	180 190 x 210	2.20	145 190 x 210
ont left zone - power (kW) / dimensions (mm) ont right zone - power (kW) / dimensions (mm)	2.50	190 x 210	2.20	210	2.20	190 x 210 210
exInduction zone left - power (kW) / dimensions (mm)	-	-	-	-	-	-
exInduction zone right - power (kW) / dimensions (mm)	-	-	-	-	-	-
ombiZone left - power (kW) / dimensions (mm)	3.60	380 x 210	3.60	380 x 210	3.60	380 x 210
ombiZone right - power (kW) / dimensions (mm)	3.60	380 x 210	-	-	- 3.70	-
ear left zone / Rear right zone - with powerBoost (max. kW) ont left zone / Front right zone - with powerBoost (max. kW)		0/3.70 0/3.70		0/3.10 0/3.70		/ 3.20
RFORMANCE / TECHNICAL INFORMATION – EXTRACTOR	5.7		5.7		5.70	
tractor energy efficiency rating		В		В		В
traction rate in m <sup>3</sup> /h <sup>(1,2)</sup>						
ducted / recirculating power level minimum		4/117		0/252		/ 252
ducted / recirculating power level maximum		0 / 487		0/441		/ 441
ducted / recirculating power level intensive bise level (sound power) based on dB[A] re 1pW (1.4)	62.	2 / 595	62.	2 / 595	622	/ 595
ducted / recirculating power level minimum	4	2 / 41	6	1/55	61	/ 55
ducted / recirculating power level maximum		9/68		9/66		/ 66
	7	4/72	74	4/72	74	172
ducted / recirculating power level intensive						

Tes, Induer las uns teature. – reacture nova available for this induce.
 All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.
 <sup>1</sup> Max 3 sensors at any time; one WSP provided.<sup>2</sup> Air flow and noise declarations made in line with CECED Code Of Conduct.
 <sup>3</sup> Sound power measured according to EN60704–3 on largest pipe diameter.

Data valid in this table as of April 2024. Subject to modification without prior notice.



#### inductionAir Plus hobs | Hobs

### Decorative hoods

#### iQ 700 LC91KLT60B

Angled glass chimney hood Black glass





#### Angled hood specifications APPLIANCE TYPE ANGLED GLASS CHIMNEY HOOD Width iQ 700 Design family Model number LC91KLT60 Colour KEY FEATURES Home Connect Adjustable LED white colour temperature climateControl sensor Intelligent Hood Automatic cookConnect hob based hood control • iQdrive Intensive setting / Automatic intensive revert Filter Saturation Indicator FEATURES Suitable for ducted / recirculating operation Electronic power level display Power levels Automatic after running (minutes) Lighting Type of control PERFORMANCE / TECHNICAL INFORMATI Energy rating Appliance width (mm) Extraction Rate in m<sup>3</sup>/h <sup>2,3</sup> - ducted / recirculating at power level 3 - ducted / recirculating at power level 4 or intensive setting 1 ducted / recirculating, intensive setting or intensive setting 2 Noise level (sound power) based on dB [A 51/59 - ducted / recirculating at power level 3 - ducted / recirculating at power level 4 or intensive setting 1 - ducted / recirculating, intensive setting or intensive setting 2 Pipe outlet diameter (mm) Minimum distance above an electric / gas hob 5 (mm) GB plug ■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive. <sup>2</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>3</sup>Measured according to EN61591 on largest pipe diameter.

<sup>4</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>5</sup>From top of pan supports.

Data valid in this table as of April 2024. Subject to modification without prior notice.





	2 year warranty	2 year warranty
	O Home Connect	Home Connect
Angled hood specifications		
APPLIANCE TYPE	ANGLED GLASS	CHIMNEY HOODS
Width	80cm	60cm
Design family	iQ 300	iQ 300
Model number	LC87KFN60B	LC67KFN60B
Colour	Black glass	Black glass
KEY FEATURES		
Home Connect		•
Adjustable LED white colour temperature		
climateControl sensor	-	-
Intelligent Hood Automatic		
cookConnect hob based hood control		•
iQdrive		•
Intensive setting / Automatic intensive revert 1		■/■
Filter Saturation Indicator	via Home Connect	via Home Connect
FEATURES		
Suitable for ducted / recirculating operation		
Electronic power level display		
Power levels	3 + 1 intensive	3 + 1 intensive
Automatic after running (minutes)	10	10
Lighting	2 x LED lights	2 x LED lights
Type of control	Touch control	Touch control
PERFORMANCE / TECHNICAL INFORMATION	A+	A+
Energy rating	790	590
Appliance width (mm) Extraction Rate in m³/h ².ª	/30	046
- ducted / recirculating at power level 3	431/429	431/429
- ducted / recirculating at power level 3 - ducted / recirculating at power level 4 or intensive setting 1	768 / 724	768 / 724
- ducted / recirculating, intensive setting or intensive setting 2	-1-	-1-
Noise level (sound power) based on dB [A] re 1pW <sup>2,4</sup>		
- ducted / recirculating at power level 3	56/62	56/62
- ducted / recirculating at power level 4 or intensive setting 1	68 / 74	68 / 74
- ducted / recirculating, intensive setting or intensive setting 2	-1-	-1-
Pipe outlet diameter (mm)	150	150
Minimum distance above an electric / gas hob <sup>s</sup> (mm)	450 / 650	450 / 650

<sup>1</sup>Power automatically reverts back to normal setting after intensive. <sup>2</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>3</sup>Measured according to EN61591 on largest pipe diameter.

<sup>4</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>5</sup>From top of pan supports.

Data valid in this table as of April 2024. Subject to modification without prior notice.

90cm

### Box chimney hoods

#### **1Q 300 LC97BHM50B**

Box chimney hood **Stainless steel** 



Box chimney hood specifications	TTTTT
APPLIANCE TYPE	BOX CHIMNEY HOOD
Width	90cm
Design family	iQ 500
Model number	LC97BHM50B
Colour	Stainless steel
KEY FEATURES	
Intensive setting / Automatic intensive revert 1	■/■
FEATURES	
Suitable for ducted / recirculating operation	■/■
Type of control	Touch control
Power levels	3 + 1 intensive
Electronic power level display	•
Automatic after running (minutes)	
Lighting	2 x LED lights
PERFORMANCE / TECHNICAL INFORMATION	
Appliance width (mm)	900
Extraction Rate in m <sup>3</sup> /h <sup>2,3</sup>	
- ducted / recirculating at power level 3	454 / 404
<ul> <li>ducted / recirculating at power level 4 or intensive setting 1</li> </ul>	
Noise level (sound power) based on dB [A] re 1pW 2.4	
<ul> <li>ducted / recirculating at power level 3</li> </ul>	65 / 82
<ul> <li>ducted / recirculating at power level 4 or intensive setting 1</li> </ul>	74176
Pipe outlet diameter (mm)	150/120
Minimum distance above an electric / gas hob 5 (mm)	550 / 650
GB plug	•

Yes, model has this feature. – Feature not available for this mode <sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>2</sup>Air Flow and noise declarations made in line with CECED Code of Conduct. <sup>3</sup>Measured according to EN61591 on largest pipe diameter.

<sup>4</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>5</sup>From top of pan supports.

Data valid in this table as of April 2024. Subject to modification without prior notice.

2 year warranty	
-	

Box chimney hood specifications		
APPLIANCE TYPE Width	60cm	X CHIMNE
Design family	60Cm	
Model number	LC67BHM50B	
Colour	Stainless steel	
KEY FEATURES	Juli liess steel	
Intensive setting / Automatic intensive revert <sup>1</sup>		
FEATURES	_/_	
Suitable for ducted / recirculating operation		
Type of control	Touch control	
Power levels	3 + 1 intensive	
Electronic power level display		
Automatic after running (minutes)	-	
Lighting	2 x LED lights	
PERFORMANCE / TECHNICAL INFORMATION		
Appliance width (mm)	600	
Extraction Rate in m <sup>3</sup> /h <sup>2,3</sup>		
<ul> <li>ducted / recirculating at power level 3</li> </ul>	459 / 404	
<ul> <li>ducted / recirculating at power level 4 or intensive setting 1</li> </ul>	752 / 499	
Noise level (sound power) based on dB [A] re 1pW <sup>2,4</sup>		
– ducted / recirculating at power level 3	64/72	
ducted / recirculating at power level 4     or intensive setting 1	73 / 76	
Pipe outlet diameter (mm)	150 / 120	
Minimum distance above an electric / gas hob <sup>s</sup> (mm)	550 / 650	
GB plug		
Energy rating	В	

2 year warranty

<sup>1</sup>Power automatically reverts back to normal setting after intensive. <sup>2</sup>Air Flow and noise declarations made in line with CECED Code of Conduct. <sup>3</sup>Measured according to EN61591 on largest pipe diameter. <sup>4</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>5</sup>From top of pan supports.

Data valid in this table as of April 2024. Subject to modification without prior notice.

90cm



110003
60cm
iQ 100
LC64BBC50B
Stainless steel
-1-
Push button control
3
-
-
2 x LED lights
600
365 / 197
-1-
63 / 66
-1-
150 / 120
550 / 650
D



## Integrated design hoods


#### 1Q 500 LJ97BAM60B

Integrated extractor hood Black body & fold out glass

90cm





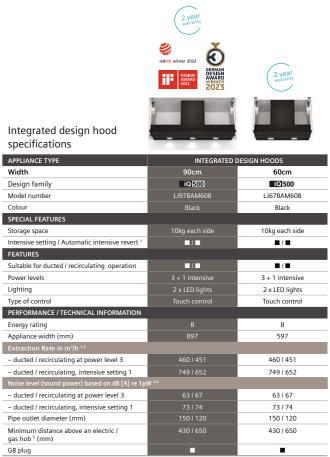

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>2</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>3</sup>Measured according to EN61591 on largest pipe diameter. <sup>4</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>5</sup>From top of pan supports.

## Telescopic hoods

## Integrated hood

#### Q 300 LI94MA531B





Telescopic hood specifications		
APPLIANCE TYPE	TELESCOP	PIC HOODS
Width	90cm	60cm
Design family	iQ 300	iQ300
Model number	LI94MA531B	LI64MA531B
Colour	Silver metallic lacquer	Silver metallic lacquer
KEY FEATURES		
iQdrive®		
Intensive setting / Automatic intensive revert 1		■/■
FEATURES		
Suitable for ducted / recirculating operation	■/■	■ / ■
Furniture door required		
Automatic after running (minutes)	10	10
Lighting	3 x LED	2 x LED
Controls	Soft touch	Soft touch
Power levels	3 + 1 intensive	3 + 1 intensive
PERFORMANCE / TECHNICAL INFORMATION		
Energy rating		A
Appliance width (mm)	898	598
Extraction Rate in m <sup>3</sup> /h <sup>2,3</sup>		
<ul> <li>ducted / recirculating at power level 3</li> </ul>	266 / 263	268 / 263
- ducted / recirculating, intensive level 1	412/353	400 / 353
Noise level (sound power) based on dB [A] re 1pV		
<ul> <li>ducted / recirculating at power level 3</li> </ul>	63 / 64	62 / 64
- ducted / recirculating, intensive level 1		69 / 68
Pipe outlet diameter (mm)	150/120	150 / 120
Minimum distance above an electric / gas hob <sup>s</sup> (mm)	430 / 650	430 / 650
GB plug		

2 year warranty

2 year warranty

#### **IQ 100 LE66MAC00B**

Integrated extractor hood Metallic silver

60cm





Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive. <sup>2</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>3</sup>Measured according to EN61591 on largest pipe diameter.

<sup>4</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>5</sup>From top of pan supports.

90cm

Data valid in this table as of April 2024. Subject to modification without prior notice.



#### Integrated hood specifications

APPLIANCE TYPE	INTEGRATED HOOD	
Width	60cm	
Design family	iQ 100	
Model number	LE66MAC00B	
Colour	Silver metallic lacquer	
FEATURES		
Suitable for ducted / recirculating operation	■ / ■	
Type of control	Push button control	
Power levels		
Lighting	2 x LED lights	
PERFORMANCE / TECHNICAL INFORMATION		
Energy rating	В	
Appliance width (mm)	599	
Extraction Rate in m <sup>3</sup> /h <sup>2,3</sup>		
- ducted / recirculating at power level 1	256 / 208	
- ducted / recirculating at power level 2	352 / 320	
- ducted / recirculating at power level 3	625 / 416	
Noise level (sound power) based on dB [A] re 1p	N 24	
- ducted / recirculating at power level 1	49 / 57	
- ducted / recirculating at power level 2	56 / 68	
- ducted / recirculating at power level 3	70 / 75	
Pipe outlet diameter (mm)	150 / 120	
Minimum distance above an electric / gas hob <sup>s</sup> (mm)	500 / 650	
GB plug		

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>2</sup>Air Flow and noise declarations made in line with CECED Code of Conduct. <sup>3</sup>Measured according to EN61591 on largest pipe diameter. <sup>4</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>5</sup>From top of pan supports.

## Canopy hoods

#### iQ 500 LB78574GB

Canopy hood Stainless steel



Canopy hood specifications	
APPLIANCE TYPE	CANOPY HOOD
Width	70 / 73cm
Design family	iQ 500
Model number	LB78574GB
Colour	Stainless steel
KEY FEATURES	
Intensive setting / Automatic intensive revert 1	
FEATURES	
Suitable for ducted / recirculating operation	
Type of control	Soft touch button control
Power levels	3 + 1 intensive
Lighting	2 x LED lights
Number of metal grease filter cassettes	2
PERFORMANCE / TECHNICAL INFORMATION	
Energy rating	С
Appliance width (mm)	700
Extraction Rate in m <sup>3</sup> /h <sup>2,3</sup>	
- ducted / recirculating at power level 3	630/571
<ul> <li>ducted / recirculating at power level 4 or intensive setting 1</li> </ul>	730 / 664
Noise level (sound power) based on dB [A] re 1pW <sup>2,4</sup>	
- ducted / recirculating at power level 3	66 / 72
<ul> <li>ducted / recirculating at power level 4 or intensive setting 1</li> </ul>	69 / 75
Pipe outlet diameter (mm)	150 / 120
Minimum distance above an electric / gas hob 5 (mm)	500 / 650
GB plug	

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive. <sup>2</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>3</sup>Measured according to EN61591 on largest pipe diameter. <sup>4</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>5</sup>From top of pan supports.

70cm

Data valid in this table as of April 2024. Subject to modification without prior notice.

2 year



Canopy hood specifications		1
APPLIANCE TYPE		
Width	70/73cm	
Design family	iQ 300	
Model number	LB75565GB	
Colour	Silver metallic lacquer	
KEY FEATURES		
Intensive setting / Automatic intensive revert 1	■ <i>I</i> -	
FEATURES		
Suitable for ducted / recirculating operation	■/■	
Type of control	Slider switch	So
Power levels	3 + 1 intensive	
Lighting	2 x LED lights	
Number of metal grease filter cassettes	2	
PERFORMANCE / TECHNICAL INFORMATION		
Energy rating	С	
Appliance width (mm)	730	
Extraction Rate in m <sup>3</sup> /h <sup>2,3</sup>		
<ul> <li>ducted / recirculating at power level 3</li> </ul>	379 / 278	
<ul> <li>ducted / recirculating at power level 4 or intensive setting 1</li> </ul>	638 / 408	
Noise level (sound power) based on dB [A] re 1pW 2.4		
<ul> <li>ducted / recirculating at power level 3</li> </ul>	56/65	
<ul> <li>ducted / recirculating at power level 4 or intensive setting 1</li> </ul>	68/72	
Pipe outlet diameter (mm)	150/120	
Minimum distance above an electric / gas hob <sup>5</sup> (mm)	650/650	
GB plug		

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive. <sup>2</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>3</sup>Measured according to EN61591 on largest pipe diameter.

<sup>4</sup>Sound power measured according to EN60704-3 on largest pipe diameter. <sup>5</sup>From top of pan supports. .

2 year worranty	2 year warranty
CANOPY HOODS	53cm
iQ 500	iQ 100
LB57574GB	LB53NAA30B
Stainless steel	
Stamless steel	Silver metallic lacquer
	-1-
=/=	-1-
Soft touch button control	Push button control
3 + 1 intensive	3
2 x LED lights	2 x LED lights
1	1
с	D
520	534
560 / 533	302 / 300
615 / 581	-1-
67/72	62 / 65
70/74	-/-
/0//4	
150/120	120
500/650	550/650

## Hood technical diagrams

#### glassdraftAir hood LD98WMM60B

(B)

≥ 550

A: Exhaust-air outlet B: Socket

C: Electric

240


D: Gas - from upper edge of pan support

E: Electric - for Australia and New Zealand


≥ 450 (**C**) ≥ 650 (**D**) ≥ 600 (**E**)

A: Electric

Technical diagrams for seamless installation can be found online at siemens-home.bsh-group.com/uk

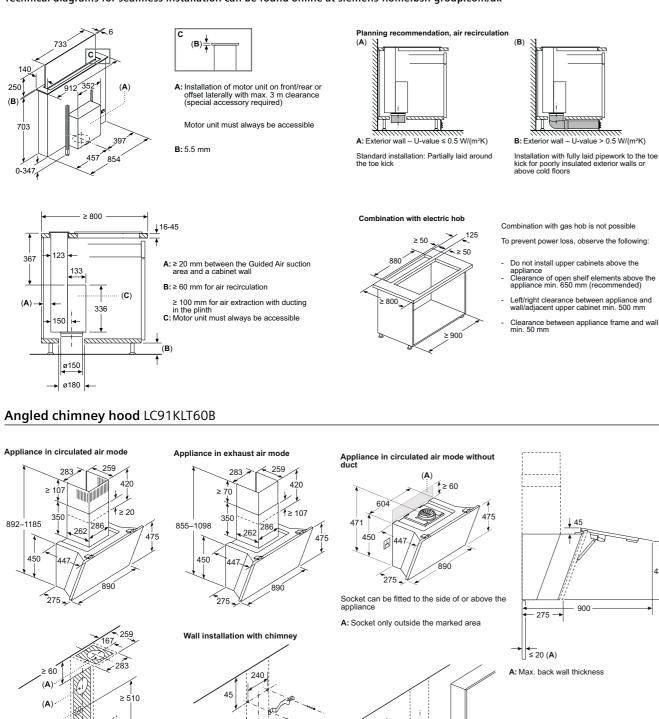

#### Angled chimney hoods LC87KFN60B and LC67KFN60B

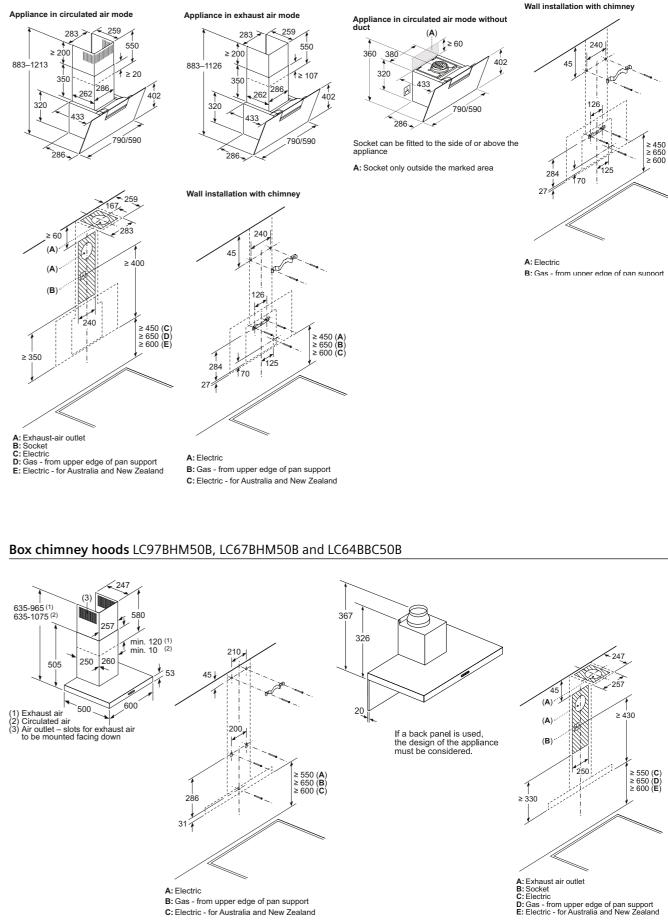

Measurements in mm. Line drawings are for reference only. Please download the latest installation guidelines from siemens-home.bsh-group.com/uk 148 Siemens cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand


≥ 450 (**A**) ≥ 650 (**B**) ≥ 600 (**C**)

≤ 370 (A

A: Max. depth of side upper cabinets (incl. door) due to installation of glass plate

cabi


iance must be installed before upper nets, if these are deeper than







## Hood technical diagrams

#### Integrated design hood LJ97BAM60B






#### Telescopic hood LI94MA531B

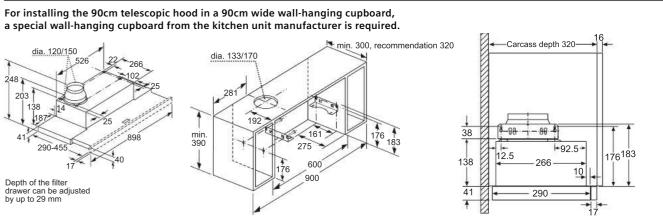



131

275

#### Telescopic hood LI64MA531B











dia. 120/150 mir 390 Depth of the filter drawer can be adjusted by up to 29 mm

Integrated hoods LE66MAC00B






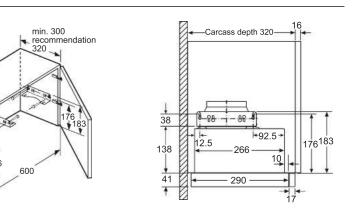





## Hood technical diagrams


#### Canopy hoods LB78574GB









#### Canopy hood LB53NAA30B

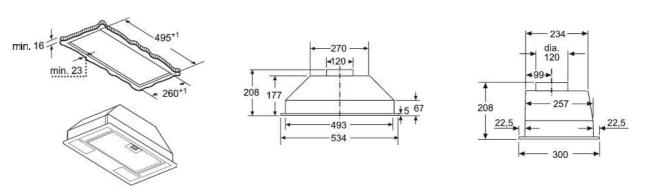

#### Canopy hood LB75565GB

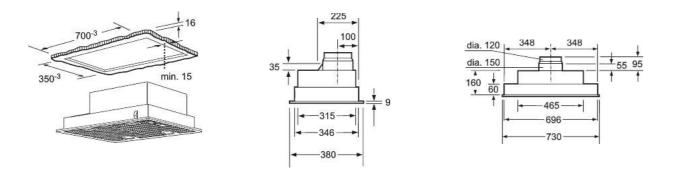

#### Canopy hood LB57574GB

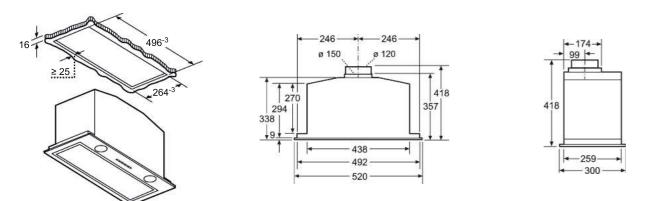

152 Measurements in mm. Line drawings are for reference only. Please download the latest installation guidelines from siemens-home.bsh-group.com/uk Siemens cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

## Intelligent cooling appliances for long lasting freshness

#### Siemens built-in cooling appliances provide the ultimate way to store food flexibly and correctly for optimum freshness.

From our smallest built-in fridge to our most impressive, each appliance brings more freshness and convenience. Siemens cooling appliances offer combinations for every individual requirement, taste and kitchen design. Siemens built-in fridges, freezers and wine coolers come in a wide range of models offering full flexibility when planning a kitchen.



#### Siemens built-in cooling warranties:



5 year warranty

A five year warranty A five year warranty is available on selected built-in cooling appliances listed in this brochure to protect against manufacturing and material faults during this warranty period.

Offer dates: 01.04.24 – 31.03.25. Online registration required. For full T&Cs and qualifying appliances visit **siemens-home.bsh-group.com/uk/customer-service/siemens-warranties** 




2 Year warranty All Siemens built-in cooling appliances listed in this brochure have a two year manufacturer's warranty as standard to protect against manufacturing or material faults.



**Compressor Drive 10 Year Warranty** Available on selected Siemens built-in fridges and fridge freezers, this warranty covers defects in the compressor motor.

To find out more about warranty and for registration, please visit: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties


## Keep food fresh for longer



Set the right conditions to ensure food stays fresh for longer: hyperFresh humidity drawers and near 0°C chiller drawers.

















Freshness controlled: hyperFresh The stylish hyperFresh control panel enables simple adjustment to the humidity in the fridge. The hyperFresh drawer with rippled base allows cool air to easily circulate around fruits and vegetables. As a result, the quality and freshness of food will be retained.



Shelf life maximised: hyperFresh Plus The hyperFresh Plus drawer does not just store food, it provides the right conditions to keep ingredients fresh for longer. Whether it is being used for storing fruits or vegetables, it will increase shelf life and reduce food wastage. Simply switch between the 2 control settings, and the humidity will be adjusted for optimum storage of the food.



#### Food stays fresh for longer: hyperFresh Premium

With a choice of 3 humidity controls, simply select between storing fruits, vegetables, or both. The hyperFresh Premium drawer will regulate how much humidity the food receives. These innovative drawers help to keep in nutrients and minerals to create delicious meals and fewer trips to the supermarkets, saving time, effort and money. hyperFresh Premium is available in selected Siemens single door fridges only.

hyperFresh near 0°C chiller drawers. Perfectly fresh for fish and meat:

hyperFresh and hyperFresh Plus models: The two hyperFresh near 0°C chiller drawers are specially designed for the storage needs of fish and meat. Keep them fresher in ideal conditions near 0°C to retain the vitamins and minerals for longer. With two separate compartments the transfer of unpleasant smells will be avoided.

hyperFresh Premium models: These variants come complete with a larger full-length near 0°C chiller drawer, where fish and meat are stored at the perfect temperature.

## Create combinations to fit every lifestyle

Our built-in cooling appliances come in a wide range of heights and widths to create the perfect combination for the kitchen.



Height and width Our built-in cooling appliances are available in a range of heights and widths to fit within a variation of kitchen designs and available spaces.

#### Height and width:

Multi Door / American Style

All dimensions are shown as Height x Width



KA93GAIDP a fander in .

American Style

183.0 x 90.5cm (freestanding)



178.7 x 90.8cm (freestanding)



177.2 x 55.8cm

177.2 x 54.1cm

193.5 x 70.8cm

193.5 x 69.1cm

193.5 x 54.1cm

Fridge freezers



**Single Door Fridges** 

D

Model shown:

KI81RADD0G

**Single Door Freezers** Model shown:

177.2 x 55.8cm

82 x 59.8cm


GI81NHCE0G

177.2 x 59.8cm 177.2 x 54cm 139.7 x 55.8cm 122.1 x 54.1cm 82 x 59.8cm

#### Fridge Freezer split options:



Fridge Freezer split % Our range of fridge freezers are available in a variety of sizes with different splits of fridge areas and freezer areas. Alternatively, a bespoke split can be created using separate fridge and freezer units stacked or paired side-by-side.



#### Flexible shelves and door racks.

Enjoy convenience with easyLift shelves. Even when full, the shelves can be raised or lowered by 6cm to make room for taller items ideal for serving jugs. Our easyLift door trays are also great for large bottles in the fridge door, the shelf can be adjusted to meet the flexible requirements of individual lifestyles.



#### modularFit cooling appliances for flexible design.

Siemens modularFit appliances are freely combinable. A kitchen should match the household's lifestyle. That is why our single door cooling and freezing appliances can be combined perfectly for individual requirements and taste. With unique and innovative cooling technologies the appliances can even enrich everyday life. Siemens modularFit appliances come with exciting innovations like hyperFresh and noFrost technology. The simple installation as well as an energy efficiency category offers maximum flexibility and freshness.

#### Combine cooling and freezing appliances in any way with modularFit.

Thanks to the anti-condensation technology, it is possible to install cooling and freezing appliances next to each other in multiple different layouts. The innovative technology prevents the build-up of moisture between the appliances, keeping everything fresh and clean.

#### Models that can sit side-by-side:

**Built-in Fridges** KI81RADD0G KI81RNSE0G KI81RVFE0G KI82LVFE0

**Built-in Freezers** GI81NHCE0G GI81NVEE0G

#### Choosing the right hinge: fixed and sliding.

Siemens built-in cooling appliances are available with specific types of hinges that either aid the installation and design of the kitchen or can be matched for replacement appliances.



#### Fixed hinge

A fixed hinge means that the furniture door is mounted to the appliance door. Advantages of a fixed hinge mean that we can offer softClosing doors that automatically close at an angle of approx 15°-20° preventing the door from accidentally being left open. The installation also offers better access to the appliance interior and due to the optimised width, higher energy efficiency with competitive volume.


They are thoroughly tested to withstand constant opening and closing. The softClose door retracts effortlessly and creates minimal noise. In addition to aesthetics, a softClose door ensures that items within the fridge are not disturbed from a heavy impact, meaning no spills to clean.

#### Sliding hinge

A sliding hinge means that the furniture door is mounted at the kitchen cabinet body as well as a sliding rail to connect the fridge and furniture door.

#### Combinations | Built-in cooling



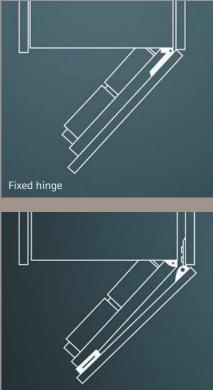

Sliding hinge

## Room to fit any lifestyle

## Standard KI86NADD0



XL KI96NVFD0



**KB96NADD0G** Q

XXL



#### The Siemens integrated XL and XXL fridge-freezers.




A perfect blend of increased capacity, freshness and flexibility that seamlessly fit into any kitchen design. With our innovative appliances, consumers can enjoy more room to store all their fresh food and ingredients, with a cooling space that adapts to their needs.



Gone are the days of constantly rearranging everything to fit in groceries. Our combinations of fridge, freezer, and door compartments provide consumers with the perfect organisation system, allowing them to store food and beverages for large parties or everyday meals without any hassle. Our XL models offer 11% more capacity compared to the standard fridge freezer, while the larger XXL models offer an impressive 45% more capacity.

But it is not just about capacity. Our integrated fridge-freezers are designed to seamlessly blend into the kitchen, while boasting sleek modern design when opened, adding style and sophistication to any kitchen.

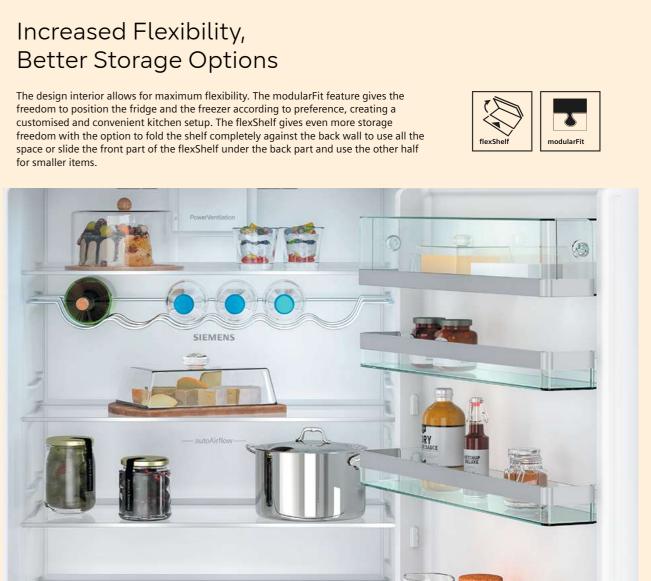

## Explore more cooling features

#### Experience intelligent cool with Home Connect.

#### Smart fridges

Flexibly control cooling appliances using a smartphone or smartwatch. Using the Home Connect app, the temperature of the fridge can be adjusted, or superCool can be turned on on the way home from the food shop. It is even possible to turn on holiday mode from anywhere, to save energy where required. The app sends useful push notifications when there has been a significant temperature change in the fridge, or if the door has been left open, minimising the risk of food waste.

#### Optimised cooling.



autoAirflow system This system works with the electronics to optimise the air circulation within the fridge and freezer compartments to ensure even cooling throughout the appliance. This means however groceries are organised, they will be cooled quickly. The back wall of the appliance has open vents which work with the cooling circuit to draw cold air into each compartment.





#### Type of control.



#### Type of control.



At the touch of a button, the in-door LCD display offers precision control to allow the optimum temperature for food to be maintained easily. This in turn helps to keep food fresh for longer.



#### LED Light.

LED

LED Light.



lights available on most of our range fit flush in the side walls or ceiling and illuminate the interior uniformly.



#### Suitable storage solutions for all needs.





#### Ergonomically ideal access Fully-retractable drawers on telescopic rails create an easy access shelving zone. This makes it easy to pull the drawers out further, providing a better overview of all food items and making them easier to remove.



Bottle rack Bottle rack

Available on some models, the perfect place to store wine of all varieties and make the best use of fridge space. The waveshaped bottle rack can be positioned in a variety of places and safely stores bottles without them rolling back and forth.



#### freshProtectbox



#### freshProtectbox

Provides the optimum temperature for individual foods, allowing them to stay fresher for longer. This in turn helps reduce waste and trips to the supermarket saving time and money.



## Freezer features

With noFrost technology, the freezer no longer needs to be defrosted manually.



¥<sup>₩</sup>k

7AF

owFrost

noFrost



For those models that come with lowFrost, life is still made easier. lowFrost reduces the build-up of frost by up to 50%, so there is no need to defrost the freezer as often - only once every 3 to 4 years. Designed to save time and provide added convenience so time can be spent doing enjoyable activities, not defrosting the freezer.

#### Storage made easy with bigBox.



Big enough for a busy lifestyle, the bigBox has the capacity for storing whole frozen turkeys, as well as the height to hold dessert glasses upright. Ideal for the holidays and entertaining.

#### Other useful freezer features.



superFreeze function superFreeze makes sure that warmer food added to the freezer does not raise the freezer temperature, stopping food partially defrosting.

superCool





iceTwister

iceDispenser as cubes or crushed. iceDispenser

17

reezerLight

freezerLight





Defrosting the freezer is now done automatically. Siemens freezers are equipped with intelligent sensor-controlled technology to save the chore of defrosting the freezer. An air-circulation system guides the humidity to the outside of the refrigerator into an external evaporation tray, and sensors measure the degree of humidity and any frost production - ensuring the appliance is periodically defrosted without the need to turn it off or empty it out. Also, ice no longer forms on the inside of the refrigerator, and the appliance's energy consumption remains consistently low.




The superCool button can be used to quickly reduce the temperature in the refrigerator to +2 °C. This prevents any undesirable rises in the temperature of already chilled food whenever new food is added which is not as cold.

Simply activate the iceTwister and receive up to 20 ice cubes at once right away. The water tank is very easy to remove for reliable refilling.

Models with this feature are able to dispense ice when needed thanks to a plumbed water connection. Depending on model, ice is available

Our special LED freezerLight makes it possible to get the perfect overview of the freezer compartment by providing light to the whole area.


#### Built-in fridge freezer range

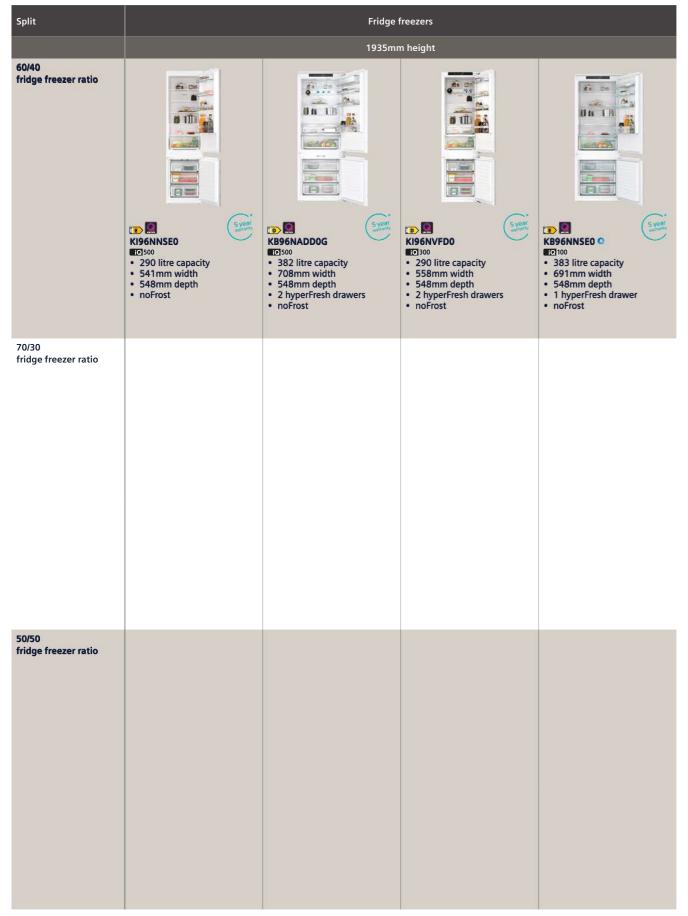




Built-in single door fridge range



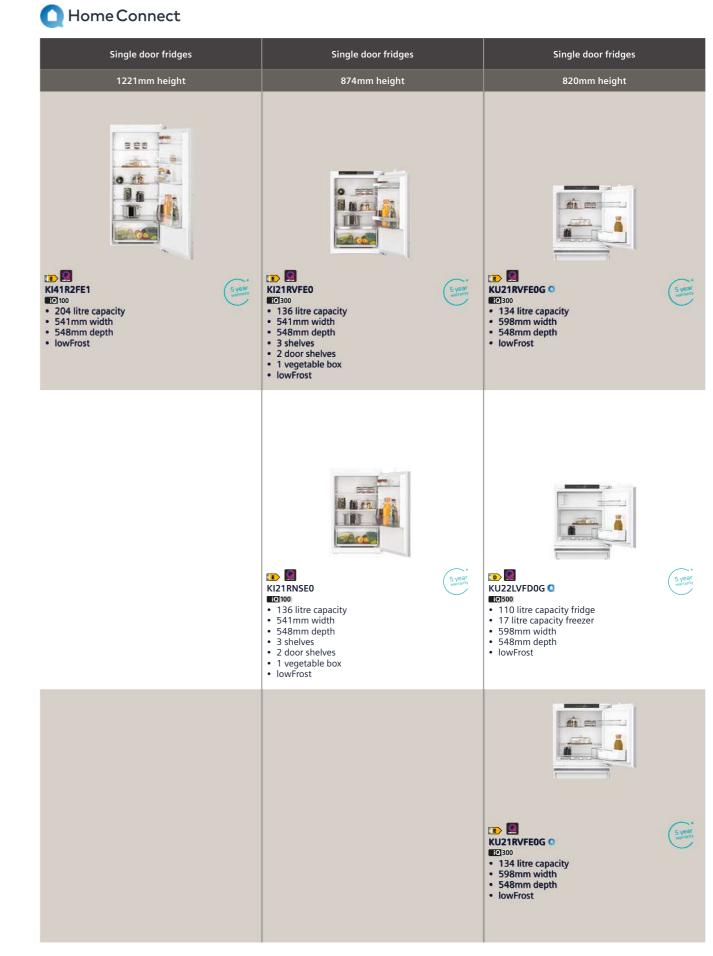

#### Built-in single door freezer range

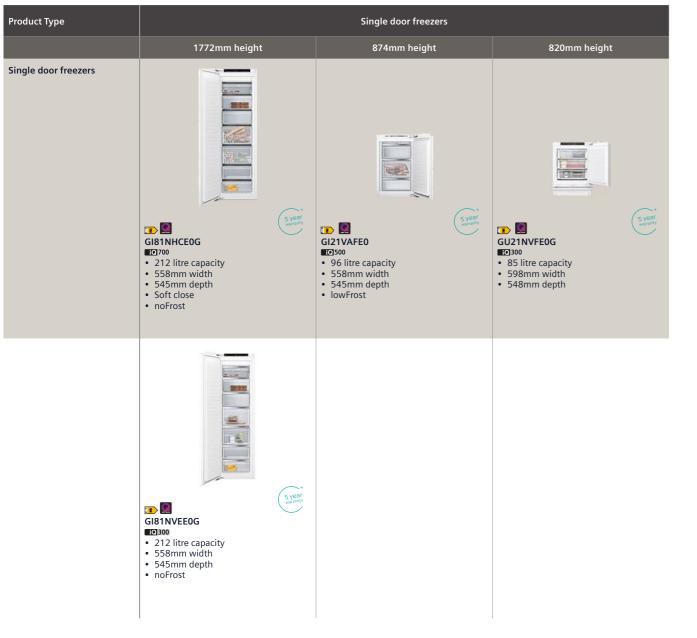

Wine cabinet range Product Type 1860mm height Built-in wine cabinet 100 2 year warranty

KW36KATGA

• 370 litre capacity

600mm wide
610mm depth

• 199 bottle capacity

7°c to 19°c temperature range



## Wine cabinets

Premium design with optimal temperature control.

#### For carefully stored and beautifully presented wine bottles.

Our wine cabinets will ensure bottles are displayed effortlessly whilst making an impressive visual statement. Thanks to Siemens state-of-the-art technology, wines will be maintained at the optimal temperature for their type. So each individual bottle whether it is red, white or sparkling, is conditioned perfectly to be enjoyed when needed.

Siemens wine cabinets are designed to provide great first-rate storage for any wine. Wine bottles are presented elegantly on beautifully crafted oak wooden shelves, reducing the risk of scratches or tears to the bottles and labels. Wood is also the perfect surface to display wine, minimising vibrations which can cause wines to age.

Light, especially sunlight, can adversely affect wine. The sun's ultra violet rays in particular can degrade and prematurely age wine. Siemens wine cabinets are equipped with LED lights to minimise heat emissions and temperature fluctuations. As a result, the cabinet remains at the optimal temperature at which it is set. Settings can be specified from 5-20°C, allowing storage of Champagne from 5-8°C, as well as red wine from 12-20°C.

The glass panelled doors are also protected with a UV filter offering further protection to bottles from any unnecessary light that can lead them to spoil or fade wine labels.


The soft LED feature provides added drama, phasing in gently to reveal the wine. If the cabinet is the focal point of the kitchen, our Presentation Mode feature will enable the light to be kept permanently on, allowing bottles to shine in all their glory.



There is space to fit up to 21 bottles in our 30cm wide cabinet, or up to 44 bottles in our 60cm wide unit. The grey interior gives a premium modern seamless finish throughout the kitchen. Each cabinet is also designed with a reversible hinge allowing the direction the door opens to be changed depending on the flow of the kitchen.

Acoustic warning light indicators will notify if the door is opened for a long period, or if the wine storage compartment is too warm or too cold for an extended period to ensure the wine is kept protected.

#### 2 Year Warranty



A Two year warranty is offered on our wine cabinets to cover manufacturing or material faults.

For more information please see page 363.

#### IQ 500 KU20WVHF0G

Built-under wine cabinet Black





Refrigerator net capacity (lite Climate Class<sup>2</sup> Noise level (dB [A] re 1pW) Noise level class Height of product (mm) Width of product (mm) Depth of product (mm)

Please note: ventilation grill not supplied.



For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

#### Wine cabinets | Built-in cooling



Built-under wine cabinet

pecifications	QUET MARK	and and
APPLIANCE TYPE	BUILT-UNDER V	VINE CABINETS
Design family	iQ 500	iQ 500
Model number	KU20WVHF0G	KU21WAHG0G
DESIGN FEATURES		
Colour of door panels	Black	Black
Colour of side panels	Black	Black
Type of glass door	3 glass panels, UV-filtered	3 glass panels, UV-filtered
Door handle type	Vertical bar handle	Vertical bar handle
Temperature display	Interior / Digital LED	Interior / Digital LED
Reversible door, hinged on right		
Home Connect / Built-in cameras	-	-
KEY FEATURES – WINE CABINET SECTION		
Range of temperature (0°C)	5 - 20	5 - 20
Temperature zones	1	2
LED light		
Number of shelves	4	5
Number of oak shelves	3	3
Number of adjustable shelves	-	-
Presenter shelf and lighting		
Capacity in 0.75L (Bordeaux bottles)	21	44
FUNCTIONS		
Door open warning signal/malfunction		•
Child lock		
PERFORMANCE & CONSUMPTION		
Energy efficiency class	<b>F</b>	ĜG
Energy consumption <sup>1</sup> (kWh/annual)	100	130
Refrigerator net capacity (litres)	58	120
Climate Class <sup>2</sup>	SN-ST	SN-ST
Noise level (dB [A] re 1pW)	38	38
Noise level class	c	С
Height of product (mm)	818	818
Width of product (mm)	298	598
Depth of product (mm)	567	581

Yes, model has this feature. – Feature not available for this model

<sup>1</sup>Actual energy consumption will depend on how the appliance is used and where it is located  $^2$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C Climate zone ST = designed to operate in ambient temperature of +16°C to 38°C

## Fridge freezers

NoFrost

#### iQ 500 KB96NADD0G

noFrost bottom fridge freezer 193.5cm high



## Specifications APPLIANCE TYPE Design family Model number DESIGN FEATURES Fridge / Freezer split noFrost lowFrost or Manual defrost softClose hinge Type of hinge (reversible) Home Connect FOOD FRESHNESS SYSTEM hyperFresh KEY FEATURES – FRIDGE SECTION

Built-in fridge freezer

softClose hinge	
Type of hinge (reversible)	Fixed hinge
Home Connect	
FOOD FRESHNESS SYSTEM	
hyperFresh	2 x hyperFresh drawers
KEY FEATURES – FRIDGE SECTION	
Light	LED
superCool function	
Type of control	Electronic
Number of shelves	5
Number of adjustable shelves	4
Number of door bins / shelves	4
Type of shelves	Safety glass
Temperature display	Digital LED
Warning signal door open	
Bottle shelves in fridge	
KEY FEATURES – FREEZER SECTION	
superFreeze function	2 🖬 🕄
Temperature adjustable in freezer	
Number of ice cube trays	1
Number of freezer drawers	3
ADDITIONAL INFORMATION	
Energy efficiency class	
Energy consumption <sup>1</sup> (kWh/annum)	204
Total net capacity (litres)	382
Refrigerator net capacity (litres)	284
Freezer net capacity (litres)	98
Climate class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	33
Noise level class	В
Additional accessories included	3 x egg trays 1 x ice cube tray 1 x bottle support
Height of product (mm)	1935
Width of product (mm)	708
Depth of product (mm)	548

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.
<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.
Data valid in this table as of April 2024. Subject to modification without prior notice.
\*5 year warranty - Offer dates: 01.04.24 - 31.03.25. T&C's apply. Online registration required.

# <image>

XXL NOFROST BOTTOM FRIDGE FREEZER

KB96NA

Ų

Built-in fridge freezer			
pecifications	QUEITMAK	CUTTIGAK	QUETMARK
APPLIANCE TYPE	XXL NOFROST BOTTOM FRIDGE FREEZER	XL NOFROST BOTTOM	FRIDGE FREEZERS
Design family	iQ 100	iQ300	iQ 100
Aodel number	KB96NNSE0	KI96NVFD0	KI96NNSE0
DESIGN FEATURES			
Fridge / Freezer split	60 / 40	60 / 40	60 / 40
oFrost			
owFrost or Manual defrost	-	-	-
softClose hinge	-	-	-
Type of hinge (reversible)	Sliding hinge	Fixed hinge	Sliding hinge
Home Connect		-	-
OOD FRESHNESS SYSTEM			
nyperFresh	1 x hyperFresh drawer	2 x hyperFresh drawers	1 x vegetable box
KEY FEATURES – FRIDGE SECTION			
Light	LED	LED	LED
superCool function			
Type of control	Electronic	Electronic	Electronic
Number of shelves	5	4	5
Number of adjustable shelves	4	3	4
Number of door bins / shelves	4	4	4
Type of shelves	Safety glass	Safety glass	Safety glass
Temperature display	Digital LED	Digital LED	Digital LED
Warning signal door open			•
Bottle shelves in fridge	-		_
KEY FEATURES – FREEZER SECTION			
superFreeze function			•
Temperature adjustable in freezer			
Number of ice cube trays	1	1	1
Number of freezer drawers	3	3	3
ADDITIONAL INFORMATION			
Energy efficiency class	t E		A E
nergy consumption <sup>1</sup> (kWh/annum)	256	184	231
fotal net capacity (litres)	383	290	290
Refrigerator net capacity (litres)	285	215	215
reezer net capacity (litres)	98	75	75
Climate class <sup>2</sup>	SN-ST	SN-ST	SN-ST
loise level (dB [A] re 1pW)	34	34	34
loise level class	В	В	В
Additional accessories included	3 x egg trays 1 x ice cube tray	3 x egg trays 1 x ice cube tray 1 x bottle support	3 x egg trays 1 x ice cube tray
Height of product (mm)	1935	1935	1935
Nidth of product (mm)	691	558	541
Depth of product (mm)	548	548	548

5 year warranty

O Home Connect

di De -

0h 11

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located. <sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.



548

Built-in fridge freezer specifications			
APPLIANCE TYPE		NOFROST BOTTOM FRIDGE FREEZERS	
Design family	iQ 500	iQ 300	iQ 300
Model number	KI86NADD0	KI86NHFE0	KI86NVFE0G
DESIGN FEATURES			
Fridge / Freezer split	60/40	60 / 40	60 / 40
noFrost			
lowFrost or Manual defrost	-	_	-
softClose hinge		_	-
Type of hinge (reversible)	Fixed hinge	Fixed hinge	Fixed hinge
Home Connect	_		_
FOOD FRESHNESS SYSTEM			
hyperFresh	2 x hyperFresh drawers	2 x hyperFresh drawers	2 x hyperFresh drawers
KEY FEATURES – FRIDGE SECTION			
Light	LED	LED	LED
superCool function		-	-
Type of control	Electronic	Electronic	Electronic
Number of shelves	4	4	4
Number of adjustable shelves	2	3	3
Number of door bins / shelves	3	3	3
Type of shelves	Safety glass	Safety glass	Safety glass
Temperature display	Digital LED	Digital LED	Digital LED
Warning signal door open			
Bottle shelves in fridge			
KEY FEATURES – FREEZER SECTION			
superFreeze function			
Temperature adjustable in freezer		-	-
Number of ice cube trays	1	1	1
Number of freezer drawers	3	3	3
ADDITIONAL INFORMATION			
Energy efficiency class	ê D	Ê E	ÊE
Energy consumption <sup>1</sup> (kWh/annum)	186	234	234
Total net capacity (litres)	260	260	260
Refrigerator net capacity (litres)	184	184	184
Freezer net capacity litres	76	76	76
Climate class <sup>2</sup>	SN-ST	SN-ST	SN-ST
Noise level (dB [A] re 1pW)	35	35	35
Noise level class	В	В	В
Additional accessories included	3 x egg trays 1 x ice cube tray 1 x bottle support	3 x egg trays 1 x ice cube tray 1 x bottle support	3 x egg trays 1 x ice cube tray 1 x bottle support
Height of product (mm)	1772	1772	1772
Width of product (mm)	558	541	541

Yes, model has this feature. – Feature not available for this model.

Depth of product (mm)

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C.

Climate zone T = designed to operate in ambient temperature of +18°C to  $43^{\circ}$ C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

noFrost lowFrost or Manual defrost softClose hinge

hyperFresh	2 x hyperFresh drawers	
KEY FEATURES – FRIDGE SECTION		
Light	LED	
superCool function	-	
Type of control	Electronic	
Number of shelves	4	
Number of adjustable shelves	3	
Number of door bins / shelves	3	
Type of shelves	Safety glass	
Temperature display	Digital LED	
Warning signal door open		
Bottle shelves in fridge		
KEY FEATURES – FREEZER SECTION		
superFreeze function		
Temperature adjustable in freezer	-	
Number of ice cube trays	1	
Number of freezer drawers	3	
ADDITIONAL INFORMATION		
Energy efficiency class		
Energy consumption <sup>1</sup> (kWh/annum)	234	
Total net capacity (litres)	260	
Refrigerator net capacity (litres)	184	
Freezer net capacity litres	76	
Climate class <sup>2</sup>	SN-ST	
Noise level (dB [A] re 1pW)	35	
Noise level class	В	
Additional accessories included	3 x egg trays 1 x ice cube tray 1 x bottle support	
Height of product (mm)	1772	

GERMAN DESIGN AWARD SPECIAL 2023

iQ 300

KI86NVSE0G

60/40

Sliding hinge

541

548

**Q** 10

Width of product (mm) Depth of product (mm)

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.  $^{\rm 2}$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to  $43^{\circ}$ C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.



APPLIANCE TYPE

DESIGN FEATURES Fridge / Freezer split

Type of hinge (reversible)

FOOD FRESHNESS SYSTEM

Home Connect

Design family Model number

-85	i i
Ball Con	
IN STATE	
	* 5 year warranty



548

5 year



548

s year
FRIDGE FREEZERS
iQ 100
KI85NNFE0G
50 / 50
50750
Fixed hinge
_
1 x vegetable box
LED
Electronic
3
2
2
Safety glass
Digital display
-
<b></b>
-
1 4
4
298
298
298 249 150 99
298 249 150 99 SN-ST
298 249 150 99 SN-ST 39
298 249 150 99 SN-ST 39 C
298 249 150 99 SN-ST 39
298 249 150 99 SN-ST 39 C 3 x egg trays 1 x ice cube tray
298 249 150 99 SN-ST 39 C 3 x egg trays 1 x ice cube tray 1 x bottle support

## Fridge freezers

LowFrost



#### iq 500 KI87SAFE0G

noFrost bottom fridge freezer 177cm high





specifications	~
APPLIANCE TYPE	LOWFROST BOTTOM FRIDGE FREEZER
Design family	iQ 500
Model number	KI87SAFE0G
DESIGN FEATURES	
Fridge / Freezer split	70/30
noFrost	-
lowFrost or Manual defrost	lowFrost
softClose hinge	-
Type of hinge (reversible)	Fixed hinge
Home Connect	-
FOOD FRESHNESS SYSTEM	
hyperFresh	1 hyperFresh drawer
KEY FEATURES – FRIDGE SECTION	
Light	LED
superCool function	
Type of control	Electronic
Number of shelves	5
Number of adjustable shelves	4
Number of door bins / shelves	5
Type of shelves	Safety glass
Temperature display	Digital LED
Warning signal door open	
Bottle shelves in fridge	-
KEY FEATURES – FREEZER SECTION	
superFreeze function	
Temperature adjustable in freezer	
Number of ice cube trays	1
Number of freezer drawers	2
ADDITIONAL INFORMATION	
Energy efficiency class	<u>E</u>
Energy consumption <sup>1</sup> (kWh/annum)	207
Total net capacity (litres)	272
Refrigerator net capacity (litres)	209
Freezer net capacity litres	63
Climate class <sup>2</sup>	SN-ST
Noise level (dB [A] re 1pW)	36
Noise level class	c
Additional accessories included	3 x egg trays 1 x ice cube tray
Height of product (mm)	1772
Width of product (mm)	558
Depth of product (mm)	545

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C. Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required. Built-in fridge freezer cnocification

APPLIANCE TYPE		I OWEROST BOTTO	M FRIDGE FREEZERS	
Design family	iQ300	iQB00	iQ300	iQ 100
Model number	KI86VVFE0G	KI87VVFE0G	KI87VVSE0G	KI87VNSE0G
DESIGN FEATURES				
ridge / Freezer split	60/40	70/30	70/30	70 / 30
noFrost	-	-	-	-
owFrost or Manual defrost	lowFrost	lowFrost	lowFrost	lowFrost
oftClose hinge	-	-	_	-
Type of hinge (reversible)	Fixed hinge	Fixed hinge	Sliding hinge	Sliding hinge
Home Connect				-
FOOD FRESHNESS SYSTEM				
NperFresh	1 hyperFresh drawer	1 hyperFresh drawer	1 hyperFresh drawer	1 x vegetable box
lyperriesh	i hyperriesii diawer	T hyper restrutawer	T hyperfiesh drawer	T X Vegetable box
KEY FEATURES – FRIDGE SECTION		·	·	
ight	LED	LED	LED	LED
superCool function	_	-	-	
ype of control	Electronic	Electronic	Electronic	Electronic
Number of shelves	4	5	5	5
Number of adjustable shelves	3	4	4	4
Number of door bins / shelves	3	4	4	4
ype of shelves	Safety glass	Safety glass	Safety glass	Safety glass
emperature display	Digital LED	Digital LED	Digital LED	Digital LED
Varning signal door open	•	•	•	
Bottle shelves in fridge				-
KEY FEATURES – FREEZER SECTION				
superFreeze function				
emperature adjustable in freezer	_	_	_	-
lumber of ice cube trays	1	1	1	1
Number of freezer drawers	3	2	2	2
ADDITIONAL INFORMATION				
Energy efficiency class		Ê E	ÊE	Ê
Energy consumption <sup>1</sup> (kWh/annum)	229	216	216	216
fotal net capacity (litres)	267	270	270	270
Refrigerator net capacity (litres)	183	200	200	200
Freezer net capacity litres	84	70	70	70
Climate class <sup>2</sup>	SN-ST	SN-ST	SN-ST	SN-ST
loise level (dB [A] re 1pW)	35	35	35	35
loise level class	В	В	В	В
Additional accessories included	3 x egg trays 1 x ice cube tray 1 x bottle support	3 x egg trays 1 x ice cube tray 1 x bottle support	3 x egg trays 1 x ice cube tray 1 x bottle support	3 x egg trays, 1 x ice cube tray
Height of product (mm)	1772	1772	1772	1772
Width of product (mm)	541	541	541	541
Depth of product (mm)	548	548	548	548

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.



Ľ

#### Fridge freezers | Built-in cooling



## Single door fridges and freezers

#### IQ 500 KI81RADE0G

Single door fridge 177cm high



180

Built-in single door fridges and freezer specifications	
APPLIANCE TYPE	FRIDGE 177CM
Design family	iQ 500
Model number	KI81RADD0G
DESIGN FEATURES	
noFrost	
lowFrost or Manual defrost	
softClose hinge	
Type of hinge (reversible)	Fixed hinge
Home Connect	
FOOD FRESHNESS SYSTEM	
hyperFresh	2 x hyperFresh drawers 1 x veg box
KEY FEATURES – FRIDGE SECTION	
Light	LED
superCool function	( )
Type of control	Electronic
Number of shelves	
Number of adjustable shelves	
Number of door bins / shelves	5
Type of shelves	Safety glass
Temperature display	Digital LED
Warning signal door open	
Bottle shelves in fridge	-
KEY FEATURES – FREEZER SECTION	
superFreeze function	
Temperature adjustable in freezer	
Number of ice cube trays	
Number of freezer drawers	
ADDITIONAL INFORMATION	
Energy efficiency class	
Energy consumption <sup>1</sup> (kWh/annum)	91
Total net capacity (litres)	310
Freezer net capacity (litres)	
Climate class <sup>2</sup>	SN-ST
Noise level (dB [A] re 1pW)	34
Noise level class	8
Additional accessories included	3 x egg trays 1 x bottle support
Height of product (mm)	1772
Width of product (mm)	558
Depth of product (mm)	548

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 - 31.03.25. T&C's apply. Online registration required.



Built-in single door fridges and freezer specifications	Sverr Sverr Sverr	En Constant Syear Syear	Syear Suranty Control of the system Suranty
APPLIANCE TYPE	FRIDGES 1	77CM	FRIDGE WITH FREEZER SECTION 177CM
Design family	iQ300	iQ 100	
Model number	KI81RVFE0G	KI81RNSEOG	KI82LVFE0
DESIGN FEATURES		Norm See	NOLLY LO
noFrost	_	_	_
lowFrost or Manual defrost			
softClose hinge			-
Type of hinge (reversible)	- Fixed hinge		- Fixed hinge
Home Connect	-		-
FOOD FRESHNESS SYSTEM			
hyperFresh	2 x vegetable boxes	2 x vegetable boxes	2 x vegetable boxes
KEY FEATURES – FRIDGE SECTION			
Light	LED	LED	LED
superCool function			
Type of control	Electronic	Electronic	Electronic
Number of shelves	7	7	6
Number of adjustable shelves	5	5	4
Number of door bins / shelves	5	5	5
Type of shelves	Safety glass	Safety glass	Safety glass
Temperature display	Digital LED	Digital LED	Digital LED
Warning signal door open			
Bottle shelves in fridge		-	
KEY FEATURES – FREEZER SECTION			
superFreeze function	-	-	-
Temperature adjustable in freezer	-	-	-
Number of ice cube trays	-	-	1
Number of freezer drawers	-	-	-
ADDITIONAL INFORMATION			
Energy efficiency class	Ê E	ÊE	ÊE
Energy consumption <sup>1</sup> (kWh/annum)	114	114	177
Total net capacity (litres)	310	310	280
Freezer net capacity (litres)	-	-	34
Climate class <sup>2</sup>	SN-ST	SN-ST	SN-ST
Noise level (dB [A] re 1pW)	35	35	35
Noise level class	В	В	В
Additional accessories included	3 x egg trays 1 x bottle support	3 x egg trays	3 x egg trays 1 x ice cube tray 1 x bottle support
Height of product (mm)	1772	1772	1772
Width of product (mm)	541	541	541
Depth of product (mm)	548	548	548

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 - 31.03.25. T&C's apply. Online registration required.

#### Single door fridges and freezers | Built-in cooling

- Home Connect	
	*
Syear watranty	5 year warranty
Engrand the December of the De	

Built-in single door fridges and freezer specifications

APPLIANCE TYPE	FREEZEF	RS 177CM
Design family	iQ 700	iQ 300
Model number	GI81NHCE0G	GI81NVEE0G
DESIGN FEATURES		
noFrost		
lowFrost or Manual defrost	-	-
softClose hinge		-
Type of hinge (reversible)	Fixed hinge	Fixed hinge
Home Connect		-
FOOD FRESHNESS SYSTEM		
hyperFresh	-	-

KEY FEATURES – FRIDGE SECTION		
Light	-	-
superCool function	-	-
Type of control	Electronic	Electronic
Number of shelves	-	-
Number of adjustable shelves	-	-
Number of door bins / shelves	-	-
Type of shelves	-	-
Temperature display	Digital LED	Digital LED
Warning signal door open	-	-
Bottle shelves in fridge	-	-
KEY FEATURES – FREEZER SECTION		
superFreeze function		
Temperature adjustable in freezer		•
Number of ice cube trays	1	1
Number of freezer drawers	5	5
ADDITIONAL INFORMATION		
Energy efficiency class		A E
Energy consumption <sup>1</sup> (kWh/annum)	235	235
Total net capacity (litres)	212	212
Freezer net capacity (litres)	212	212
Climate class <sup>2</sup>	SN-T	SN-T
Noise level (dB [A] re 1pW)	35	35
Noise level class	В	В
Additional accessories included	1 x ice cube tray	1 x ice cube tray
Height of product (mm)	1772	1772
Width of product (mm)	558	558
Depth of product (mm)	545	545

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

Built-in single door fridges and freezer specifications	Stear Starting Starting Starting Starting	Syear Watany Watany	Syear Waranty
APPLIANCE TYPE	FRIDGE 122CM	FRIDGES	87CM
Design family	iQ 100	iQ 300	iQ 100
Model number	KI41R2FE1	KI21RVFE0	KI21RNSE0
DESIGN FEATURES			
noFrost	-	-	-
lowFrost or Manual defrost			
softClose hinge	-	-	-
Type of hinge (reversible)	Fixed hinge	Fixed hinge	Sliding hinge
Home Connect	-	-	-
FOOD FRESHNESS SYSTEM			
hyperFresh	1 x vegetable box	1 x vegetable box	1 x vegetable box
KEY FEATURES – FRIDGE SECTION			
Light	LED	LED	LED
superCool function			
Type of control	Electronic	 Electronic	Electronic
Number of shelves	5	3	3
Number of adjustable shelves	4	2	2
Number of door bins / shelves	4	2	2
Type of shelves	Safety glass	Safety glass	Safety glass
Temperature display	Digital LED	Digital LED	Digital LED
Warning signal door open	•		•
Bottle shelves in fridge	_		-
KEY FEATURES – FREEZER SECTION			
superFreeze function	-	-	-
Temperature adjustable in freezer	-	-	-
Number of ice cube trays	-	-	-
Number of freezer drawers ADDITIONAL INFORMATION	-	-	-
Energy efficiency class	Ê E	<b>≜</b> E	A E
Energy consumption <sup>1</sup> (kWh/annum)	101	92	92
Total net capacity (litres)	204	136	136
Freezer net capacity (litres)	-	-	-
Climate class <sup>2</sup>	SN-ST	SN-ST	SN-ST
Noise level (dB [A] re 1pW)	35	35	35
Noise level class	В	В	В
Additional accessories included	3 x egg trays	3 x egg trays 1 x bottle support	3 x egg trays
Height of product (mm)	1221	874	874
Width of product (mm)	541	541	541
Depth of product (mm)	548	548	548

Depth of product (mm) Yes, model has this feature. – Feature not available for this model

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C.

Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required





Built-in single door fridges and reezer specifications	Syear warenty	Syear Warrenty
APPLIANCE TYPE	FREEZER 87CM	BUILT-UNDER FRIDGES WITH ICE BOX 82CM
Design family	iQ 500	iQ 500
Model number	GI21VAFE0	KU22LVFD0G
DESIGN FEATURES		
noFrost	-	-
lowFrost or Manual defrost		
softClose hinge	-	-
Type of hinge (reversible)	Fixed hinge	Fixed hinge
Home Connect	_	•
FOOD FRESHNESS SYSTEM		·
hyperFresh	-	-
KEY FEATURES – FRIDGE SECTION		
Light	-	LED
superCool function	-	
Type of control	Electronic	Electronic
Number of shelves	-	3
Number of adjustable shelves	-	2
Number of door bins / shelves	-	2
Type of shelves	-	Safety glass
Temperature display	Digital LED	Digital LED
Warning signal door open	-	
Bottle shelves in fridge	-	-
KEY FEATURES – FREEZER SECTION		
superFreeze function		-
Temperature adjustable in freezer		-
Number of ice cube trays	1	1
Number of freezer drawers	3	-
ADDITIONAL INFORMATION		
Energy efficiency class		
Energy consumption <sup>1</sup> (kWh/annum)	176	119
Total net capacity (litres)	96	110
Freezer net capacity (litres)	-	17
Climate class <sup>2</sup>	SN-T	SN-T
Noise level (dB [A] re 1pW)	36	35
Noise level class	С	В
Additional accessories included	1 x ice cube tray	3 x egg trays 1 x ice cube tray
Height of product (mm)	874	820
Width of product (mm)	558	598

Depth of product (mm) ■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located. Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

Built-under single door fridges and	
freezer specifications	



APPLIANCE TYPE	BUILT-UNDER FRIDGES 82CM
Design family	iQ300
Model number	KU21RVFE0G
DESIGN FEATURES	
noFrost	-
lowFrost or Manual defrost	
softClose hinge	-
Type of hinge (reversible)	Fixed hinge
Home Connect	•
FOOD FRESHNESS SYSTEM	
hyperFresh	-
KEY FEATURES – FRIDGE SECTION	
Light	LED
superCool function	
Type of control	Electronic
Number of shelves	4
Number of adjustable shelves	3
Number of door bins / shelves	2
Type of shelves	Safety glass
Temperature display	Digital LED
Warning signal door open	
Bottle shelves in fridge	-
KEY FEATURES – FREEZER SECTION	
superFreeze function	-
Temperature adjustable in freezer	-
Number of ice cube trays	_
Number of freezer drawers	-
ADDITIONAL INFORMATION	
Energy efficiency class	
Energy consumption <sup>1</sup> (kWh/annum)	93
Total net capacity (litres)	134
Freezer net capacity (litres)	-
Climate class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	35
Noise level class	В
Additional accessories included	3 x egg trays
Height of product (mm)	820
Width of product (mm)	598
Depth of product (mm)	548

■ Yes, model has this feature. - Feature not available for this model.


<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located. Climate zone SN = designed to operate in ambient temperature of  $+10^{\circ}$ C to  $32^{\circ}$ C. Climate zone SN = designed to operate in ambient temperature of  $+18^{\circ}$ C to  $43^{\circ}$ C.


Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

ar nty	
	BUILT-UNDER FREEZERS 82CM
	iQ 300
	GU21NVFE0G
	•
	-
	-
	Fixed hinge
	•
	_
	-
	-
	Electronic
	_
	_
	Digital LED
	-
	-
	1
	3
	189
	85
	85
	SN-T
	35
	В
	1 x ice cube tray
	820
	598
	548


#### Wine cabinet KU20WVHF0G

#### noFrost XXL bottom fridge freezer KB96NNSE0

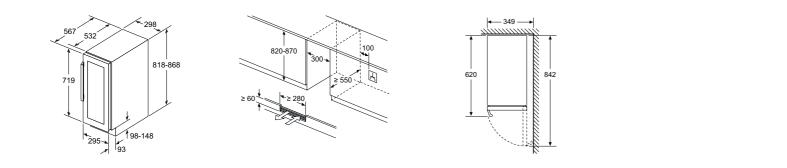


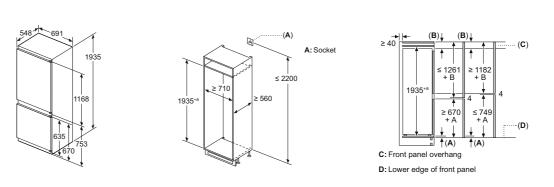


#### Wine cabinet KU21WAHG0G

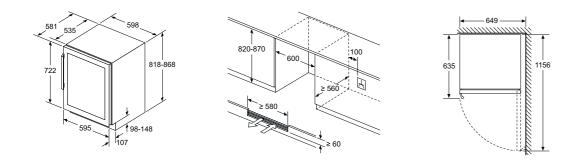


#### noFrost XL bottom fridge freezer KI96NVFD0




#### noFrost XXL bottom fridge freezer KB96NADD0G

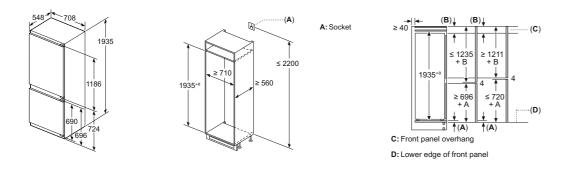

#### noFrost XL bottom fridge freezer KI96NNSE0




A:≥ 560 mm (recommended) B: Socket




D: Lower edge of front panel

A:≥ 560 mm (recommended) B: Socket




D: Lower edge of front panel

#### noFrost bottom fridge freezer KI86NADD0

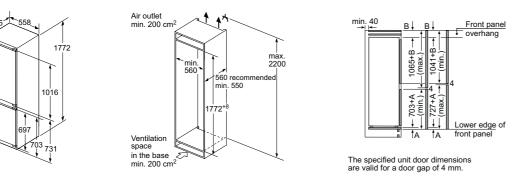



#### noFrost bottom fridge freezers KI85NNFE0G

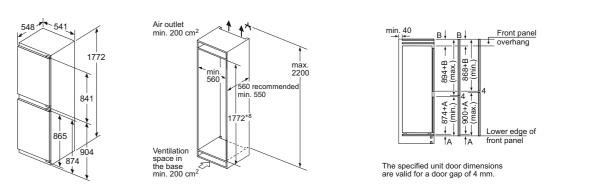


lowFrost bottom fridge freezer KI87SAFE0G


#### noFrost bottom fridge freezers KI86NHFE0 and KI86NVFE0G

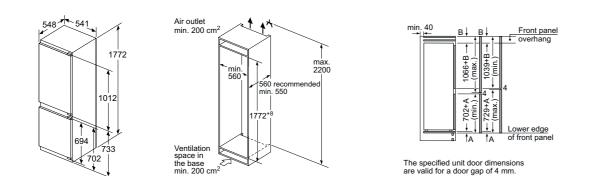

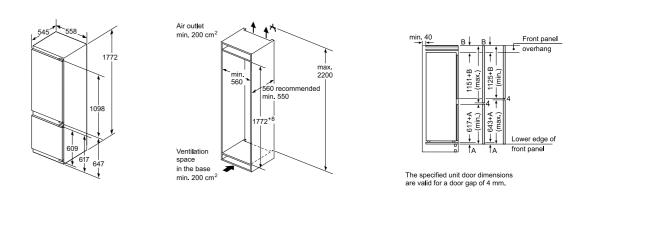


#### noFrost bottom fridge freezers KI86NVSE0G






The specified unit door dimensions are valid for a door gap of 4 mm.

#### lowFrost bottom fridge freezer KI86VVFE0G











The specified unit door dimensions are valid for a door gap of 4 mm.


#### lowFrost bottom fridge freezers KI87VVFE0G

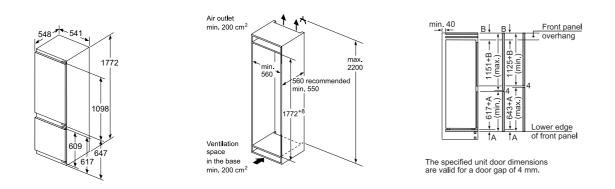


#### 177cm fridge KI81RNSE0G




#### lowFrost bottom fridge freezers KI87VVSE0G and KI87VNSE0G

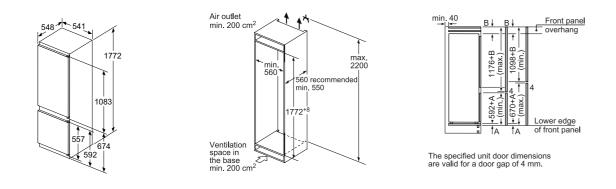


#### 177cm freezers GI81NHCEOG and GI81NVEEOG




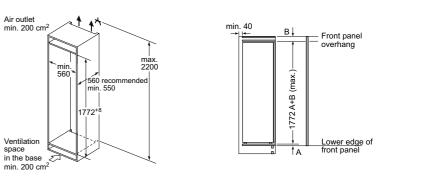


#### 177cm fridges KI81RADDOG, KI81RVFE0G and KI82LVFE0

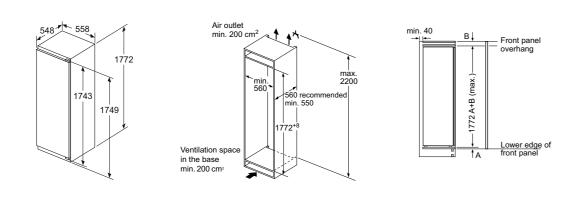


#### 122cm fridge KI41R2FE1




190 Measurements in mm. Line drawings are for reference only. Please download the latest installation guidelines from siemens-home.bsh-group.com/uk Siemens cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.







#### 87cm fridge and freezer KI21RVFE0 and GI21VAFE0

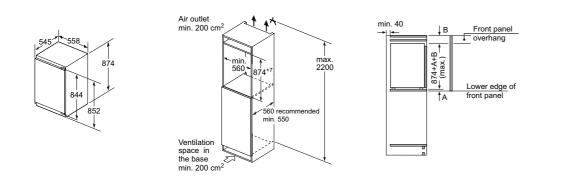


#### 87cm fridge KI21RNSE0

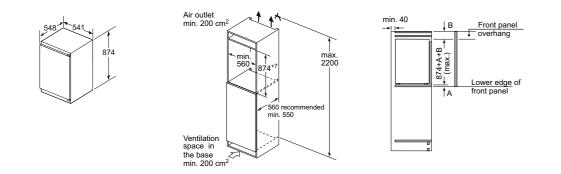

#### 82cm built-under fridges and freezer KU22LVFD0G, KU21RVFE0G and GU21NVFE0G

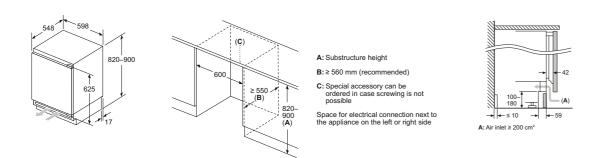



Technical diagrams | Built-in cooling

## Cooling. Super efficient, super stylish

Elegant, functional and packed with technology, a Siemens freestanding fridge freezer is a talking point in the kitchen.

Whether it is an American Style fridge freezer that has a wow-factor, a side by side fridge and freezer for extra space, or a single appliance, Siemens has a wide range of products to choose from. Our energy efficient appliances are packed with food preservation technology.



Siemens freestanding cooling warranties:



#### 5 year warranty

A five year warranty is available on selected freestanding cooling appliances listed in this brochure to protect against manufacturing and material faults during this warranty period.

Offer dates: 01.04.24 - 31.03.25. Online registration required. For full T&Cs and qualifying appliances visit siemens-home.bshgroup.com/uk/customer-service/siemens-warranties



2 year warranty All other Siemens cooling appliances have a two year manufacturer's warranty as standard to protect against manufacturing or material faults.



10 Year Compressor Drive Warranty Available on all Siemens freestanding fridge freezers, covers defects in compressor motor.

To find out more about warranty and for registration, please visit: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties

## Keeping food fresh for longer:



## hyperFresh technology

Set the right conditions to ensure food stays fresh for longer with hyperFresh humidity drawers and near 0°C chiller drawers.








hyperFresh olus Simply use the stylish control panel to adjust the humidity in the fridge. The hyperFresh drawer with a rippled base allows cool air to circulate easily around fruits and vegetables. As a result, the quality and freshness of the ingredients will be retained.

Freshness controlled: hyperFresh

Shelf life maximised: hyperFresh Plus



The hyperFresh Plus drawer does not only store food, it provides the right conditions to keep ingredients fresh for longer. Whether it is fruits or vegetables, using the drawer will increase shelf life and reduce food wastage. Simply switch between the 2 control settings, and the humidity will be adjusted for optimum storage of food.





Food stays fresh for longer: hyperFresh Premium Enjoy fresher food with hyperFresh Premium. With a choice of 3 humidity controls, simply select between storing fruits, vegetables, or both. The hyperFresh Premium drawer will regulate how much humidity the food receives. These innovative drawers help to keep in nutrients and minerals to create delicious meals and require fewer trips to the supermarkets, saving time, effort and money. hyperFresh Premium is available in selected Siemens single door fridges only.

Perfectly fresh for fish and meat: hyperFresh near 0°C chiller drawers

The hyperFresh near 0°C chiller drawers, on the hyperFresh and hyperFresh plus models, are especially designed for the storage needs of fish and meat. Keep them fresh in ideal conditions near 0°C to retain the vitamins and minerals for longer. With two separate compartments the transfer of unpleasant smells will be avoided.

hyperFresh Premium models come complete with a larger full-length near 0°C chiller drawer, where fish and meat are stored at the perfect temperature.



done again.



## ×¥<sup>₩</sup>k 7AF

## S norrost samonths a = 8 months a = 8 mont Technology that helps 6 months make life easier FO

#### Freezer storage made easy with bigBox.



Big enough for a busy lifestyle, the bigBox has the capacity for storing whole frozen turkeys, an entire leg of lamb, several pizzas, as well as the height to hold dessert glasses upright.

The bigBox provides plenty of space to accommodate and stack everything. And when an even larger space is needed, all the drawers and shelves can be easily removed from the freezer compartment which is ideal for the holidays and entertaining.





Smart fridges Cooling appliances with Home Connect offer the ability to flexibly control Siemens appliances using smart devices, such as a smart phone, tablet or smart speaker. This means appliances can be controlled from anywhere; for example adjusting the fridge temperature to cool down whilst on the way home from the supermarket, or setting the fridge to holiday mode whilst at the airport. Push notifications can also be set up to send an alert if the door has accidentally been left open, or if the temperature has risen above a certain level.

For more information about Home Connect visit https://www.siemens-home.bsh-group.com/uk/inspiration/ innovation/connected/cooling

#### With noFrost technology, the job of defrosting the freezer never needs to be



#### noFrost

Defrosting the freezer is now done automatically. Siemens freezers are equipped with intelligent sensor-controlled technology to save the hassle of defrosting the freezer. An air-circulation system guides the humidity to the outside of the refrigerator into an external evaporation tray, and sensors measure the degree of humidity and any frost production – ensuring the appliance is periodically defrosted without the need to turn off the appliance or empty it out. Also, ice no longer forms on the inside of the refrigerator, and the appliance's energy consumption remains consistently low.



#### lowFrost

Thanks to the innovative lowFrost technology with the special evaporator, not only is there less ice build up, but also defrosting is much faster than in conventional systems. All lowFrost models have a water drainage system, to allow removal of all thawed water during the defrosting process.

#### Stay connected in the kitchen, with Home Connect.

## Premium cooling options


#### for every size and style of kitchen

Choose the style and size.

When considering which freestanding appliance to purchase look at, what height space there is available? Consider the width? Is more capacity needed? Is more fridge or freezer space required?

#### Height and width

Siemens has many different sizes of cooling models to suit varying needs from: 183cm-203cm high and between 60cm and 91cm in width.

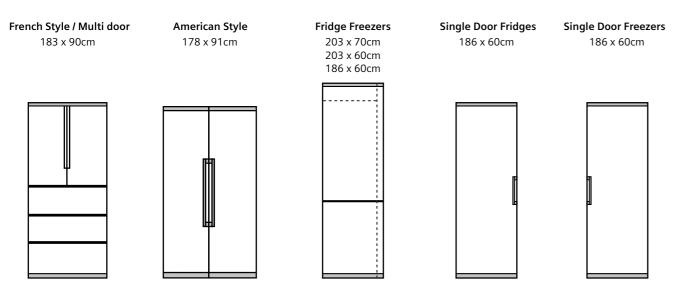

#### Fridge Freezer split options

Siemens freestanding fridge freezers are split into two separate compartments so the split proportions can be decided depending on the food usage requirements.





Q




#### Create the perfect pair.

For extra internal space pair one of the below Siemens upright fridges alongside a Siemens upright freezer to re-create the style of an American fridge freezer with our easy access shelving zone.

For a design statement, combine the Black Steel iQ500 KS36VAXEP (fridge) with the iQ500 GS36NAXEP (freezer).

To complete these looks, a joining strip will need to be purchased to secure the two appliances. These can be bought through our website or through a retailer.

The joining strip product codes are: KS39ZAL00 – Stainless Steel Easy Clean KS39ZAX00 – Black Steel





Models shown above: KS36VVIEPG (fridge)



KS39ZAL00

#### Tried and tested.

All Siemens fridges and freezers are built to last. Rigorous testing ensures that our products meet all the requirements of our customers. Every single one of our appliances is tested before it leaves the factory. For 24 hours a day, components are tested continuously to the maximum tolerance possible for the equivalent lifetime of the appliance.



Our doors are weighted and then opened and closed by the handle 200,000 times during testing to ensure they are robust (200,000 times is equivalent to opening and closing the door 27 times per day for 20 years). Materials are not only tested for suitability and longevity, we also look at how they sound and feel when we use them.

## Make a stylish statement in the kitchen.

#### Introducing Multi Door / American Style fridge freezers.

From the premium double-width shelving to the sleek outer finishes – the Multi Door / American Style fridge freezers are designed to stand out in the kitchen. Behind the scenes, our cooling technologies such as multiAirFlow and fresh boxes provide the optimum temperatures to keep all food and drink at their best while adjustable shelving and smart compartments make it easy to personalise fridge space and keep shopping organised. Also with noFrost technology, the freezer will never need to be defrosted again.





#### Room for more. Refreshment at any time.

#### Room for more

The KF96RSBEA comes with a full width fridge and pull-out freezer. It even comes with a separate beverage drawer that has premium oak shelving compartments and five different set temperatures for soft drinks, beer, champagne, white wine and red wine. The beverage drawer stores drinks at the ideal temperature, always ready to enjoy. Perfect for busy kitchens.



Multi Door / American Style fridge freezers | Freestanding cooling

#### **Refreshment anytime**


The new KF96DPXEA is the perfect combination, where freshness meets intelligent design. Featuring a quick ice and water dispenser with bottle fill function that can dispense up to 5kg of ice per day (cubes or crushed). It can also dispense freshly filtered water as needed with the built-in UltraClarityPro water filter. It also features a multi purpose shelf, which can be used as a bottle rack or flat, giving storage flexibility.



## Cooling key features

#### Colour finish options.

Choose from a selection of colour finishes on Siemens cooling appliances. There is an option to suit every kitchen.



Stainless steel



antiFingerprint

Black glass

antiFingerprint

Handle options.

Depending on preference, choose from stylish quality bar handles or handles that are integrated into the appliance for a more seamless look.





Integrated Vertical

- Vertical Bar Handle (Long)
- Vertical Bar Handle (Short)

#### Temperature displays.

There are options for cooling appliances with a large front display, or with the control hidden on the inside of the appliance as our Siemens cooling range varies from large digital screens visible on the front door of the appliance to internal LED controls.



**Exterior Electronic** Display

Interior Electronic LED Display







easyAccess shelving zone on single door freezers Creates additional space whilst delivering the design of an American fridge freezer interior compartment.



LED Illumination

Integrated seamlessly into the top or the side walls of our cooling appliances, LED lighting is very efficient and gives maximum illumination of the fridge and freezer.



autoAirflow system

This system works with the electronics to optimise the air circulation within the fridge and freezer compartments to ensure even cooling throughout the appliance. This means however groceries are organised, it will cool them quickly no matter where they are placed. The back wall of the appliance has open vents which work with the cooling circuit to draw cold air into each compartment.



#### easvLift

Adjustable door trays and glass shelves that can be moved even when full for optimal convenience.



#### Bottle rack

Available on some models which is the perfect place to store wine of all varieties and make the best use of the fridge space.

## Experience intelligent cool



#### Fresh food for longer with sensor controlled cool.



for longer.





superFreeze

Wrap around evaporator



#### Explore more features that work around busy lifestyles.

A
Safety glass



#### freshSense

Fresh food guaranteed for longer. With conventional fridges, varying surrounding temperatures and the continuous opening of the refrigerator door lead to temperature changes inside the appliance. To ensure this does not affect the food inside, sensors immediately react to any changes. The freshSense sensors activate as soon as a change in temperature is registered and compensates for this change in an instant. Therefore the temperature always remains within the optimum range, and food stays fresh and delicious

#### Inverter motor

The intelligent inverter technology is a clever combination of the inverter motor and sensor. The sensors register every slight change in temperature or humidity inside the refrigerator, for example when the door is opened or warm food is stored. This information is then passed to the inverter motor, which adapts its need for energy accordingly. This means food can be cooled intelligently and energy efficiently, and thanks to the high-quality inverter motor, incredibly quietly.

#### superCool

Ensures that warmer food entering the fridge does not increase the fridge temperature, which can affect other food.

#### superFreeze

superFreeze makes sure that warmer food added to the freezer does not raise the freezer temperature, stopping food partially defrosting.

#### Wrap around evaporator

This new technology creates more space in the freezer cavity, allowing for more innovations like bigBox for large food items, plus removable glass drawers.

#### iceTwister

Simply activate the iceTwister and receive up to 20 ice cubes at once right away. The water tank is very easy to remove for reliable refilling.

#### safetyGlass shelves

All safety glass shelves are made from extra strong, easy-to-clean glass. If something tips over, the spillage is contained and does not spill into the rest of the refrigerator compartment.

#### Holiday mode

Holiday Mode will ensure that food in the freezer stays cold enough to maintain freshness whilst reducing its energy output. Our fridges also feature a warning alarm that signals when the door has been left open, ensuring that energy is not needlessly wasted and preserving the food inside.


Freestanding multi door / American fridge freezer

Product Type	Multi Door / America		
	1830mi	m height	
Multi Door / American style fridge freezer			
	KF96DPXEA O Corroo 574 litre capacity 905mm width 731mm depth 2 hyperFresh drawers • noFrost	<b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>FORMERANCE</b> <b>F</b>	
American style fridge freezer			




Freestanding multi door / American fridge freezer product overview | Built-in cooling

#### Freestanding fridge freezers

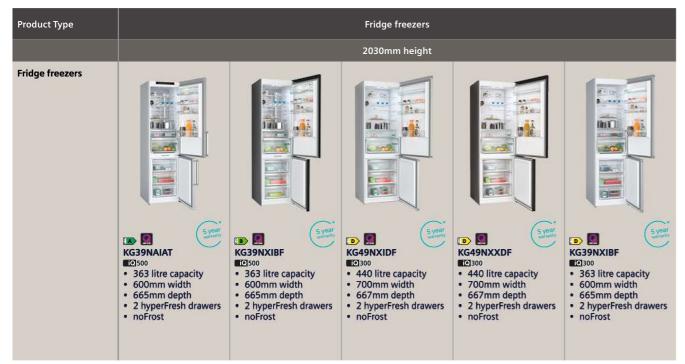

#### Freestanding single door fridges and freezers

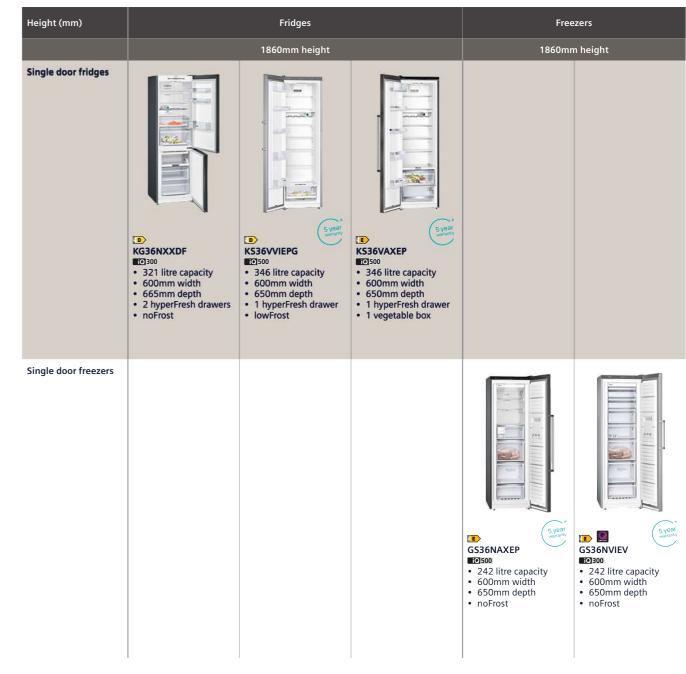

Freestanding fridge freezers, single door fridges and freezers product overview | Built-in cooling



## Wine cabinet

#### iQ 500 KW36KATGA

Freestanding wine cabinet Grey, glass door





Design family Model number DESIGN FEATU Colour of door Colour of side pa Type of glass do Door handle ty Temperature dis Reversible door Home Connect KEY FEATURES

APPLIANCE TY

Range of tempe Temperature zo LED light Number of shel Number of oak Number of adju Presenter shelf

Capacity in 0.75 FUNCTIONS Door open war Child lock PERFORMANC Energy efficien

Energy consum Refrigerator net Climate Class<sup>2</sup> Noise level (dB Noise level clas Height of produ Width of produc Depth of produ

#### Wine cabinet | Freestanding cooling



#### Wine cabinet specifications

/PE	FREESTANDING WINE CABINETS
ly	iQ 500
r	KW36KATGA
JRES	
panels	Silver
panels	Black
oor	3 glass panels, UV-filtered
/pe	Integrated veertical bar handle
lisplay	Interior / Digital LED
r, hinged on right	
t / Built-in cameras	-
S – WINE CABINET SECTION	
erature (0°C)	7 - 19
ones	2
	LED
lves	10
<pre>shelves</pre>	8
ustable shelves	4
f and lighting	
'5I (Bordeaux bottles)	199
rning signal/malfunction	
CE & CONSUMPTION	
ncy class	G
nption¹ (kWh/annum)	155
et capacity (litres)	370
	SN-ST
[A] re 1pW)	38
55	c
uct (mm)	1860
uct (mm)	600
uct (mm)	610

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located. Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone ST = designed to operate in ambient temperature of +16°C to 38°C

#### iQ 700 KF96RSBEA

Multi Door / American Style fridge freezer Black glass door, cast iron sides



#### Multi Door / American Style fridge freezer specifications

Designation10000Designation00000Distance000000Distance000000Distance0000000Distance0000000000Distance00000000000000Distance000000000000000000000000000000000	APPLIANCE TYPE	FREESTANDING 90CM
Design PLAYUREColour of sider panelsElick glassColour of sider panelsCast ionSyle of handleCast ionColour of handleCast ionProblemI > hyperFirsh drawerProblemI > hyperFirsh drawerProblemLEDProduct highlightsLEDsuperColour of handleElectronicProduct highlightsLEDsuperColour of handleSNumber of diputable sheesSNumber of diputable sheesSNumber of diputable sheesSNumber of of highlightsElectronicSuperColour of sheelesSNumber of diputable sheelesSNumber of diputable sheelesSNumber of of highlightsSSuperText RutchingSNumber of diputable in freezerSNumber of diputable in fr	Design family	iQ 700
Calour dispressionEntry dataCalour dispressionCats lonSyle of handleCats lonCalour dispressionCats lonIndract in fulge and freezerCats lonindro CansetCats lonConsetCats lonConsetCats lonConsetCats lonConsetCats lonPort Entry Stry Stry MCats lonConsetSuper ConsetConsetSuper ConsetConset StrongSuper ConsetSuper Conset	Model number	KF96RSBEA
Colour of shanelsCestionSyle of handeIntegrated vertical handleColour of handeCastrionnoñrost infidge and InezarIntegrated vertical handleIntegrated vertical and IndexIntegrated vertical handleIntegrated startIntegrated vertical handleFOOD FRESHINESS SYSTEMIntegrated vertical handleFOOD FRESHINESS SYSTEMIntegrate startProduct Integrated StartIntegrated drawerProduct Integrated StartIntegrated drawerNumber of adjutable IntegrateIntegrated drawerNumber of adjutable IntegrateIntegrated drawerNumber of adjutable IntegrateIntegrated drawerStart FACUUES - FREEZER StartIntegrated drawerNumber of adjutable IntegrateIntegrated drawerIntegrated adjutable IntegrateIntegrated drawerStart FREE IntegrateIntegrated drawerStart FREE IntegrateIntegrated drawerStart FREE Integrated drawerIntegrated drawerStart FREE Integrated d	DESIGN FEATURES	
Syle of hauleIntegrated vertical hauleColour of hauleGastitionIndoct in findige and necearGastitionHome ContextImage ContextByperFreichImage ContextSyle SYSTMImage ContextSyle SYSTMImage ContextSyle Color RES. MISCE SECTONImage ContextSyle Color Res. MISCE SECTONImage ContextSyle Color Res. MISCE SECTONImage Color Res. MISCE SECTONSyle Color Res. MISCE SECTONImage Color Res. MISCE RES. MIS	Colour of door panels	Black glass
Color of handle         Castion           norkrosi in fridge and freezer         I           Hone Connet         I           FOOD FRESHNESS SYSTEM         I           FOOD FRESHNESS SYSTEM         I           Product highlights         I           Super Fresh         I           Product highlights         ILD           super Coll function         ILD           Product highlights         ILD           Super Coll function         ILD           Number of shelves         S           Reference         S           Number of shelves         S           Reference         S           Number of dor bins' shelves         G           Reference         G           Sumber of dor bins' shelves         G           Sumber of dor bins' shelves         G           Sumper Status Status         G           Sumper Status Status         G           Sumper Status Status         S           Sumper Status Status         S           Sumper Status Status         S           Sumper Status Status         S           Status Status Status         S           Status	Colour of side panels	Cast iron
ndrast in fridge and freezerINome ConnectIFOOD RESUNSS SYSTEMIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFreshIStyperFresh	Style of handle	Integrated vertical handle
Home Connect         I           FOOD FEXINLESS SYSTEM         1 x hyperFresh drawer           FOOD FEXINLESS SYSTEM         1 x hyperFresh drawer           Product DisplicitleS         1 x hyperFresh drawer           RY FEX.URES         1 x hyperFresh drawer           Product Induition         1 x hyperFresh drawer           SuperCol Induition         1 x hyperFresh drawer           Number of draitsbe sheles         3 x expression           World of or Bris Jakeles         1 x hyperFresh drawer           Ry FEXERS SYSCIM         1 x hyperFresh drawer           Stringer fresh drawer         0 x Bitter           Ry FEXERS SYSCIM         1 x Bitter           Stringer fresh drawer         1 x Bitter           Number of dract RRESTER SYSCIM         1 x Bitter           Stringer fresh drawer         1 x Bitter           Number of dract RRESTER SYSCIM         1 x Bitter           Stringer fresh dra	Colour of handle	Cast iron
FOOD FRESHNESS SYSTEM         I x hyperFresh           hyperFresh         1 x hyperFresh           hyperFresh         1 x hyperFresh           KEY FEATURES - FRIDOE SECTION         IED           superCool function         IED           superCool function         IED           superCool function         IED           superCool function         IEC           Super Cool function         IEC           super Cool function         IEC           super Cool function         IEC           Number of adjustable shelves         Sol           Number of adjustable shelves         Beverage drawer           Number of adjustable shelves         Beverage drawer           Number of adjustable shelves         Beverage drawer           Number of adjustable shelves         IED           Stef shelves in fidge         IED           KEY FEATURES - FREEZER SECTION         IED           Superfreear function         IED           Itempeature display         IED           Number of fice cube trays         IED           Number of fice cube trays         IED           Number of fice cube trays         IED           Rengy entities filt for Manum)         IED           Seerer cube cube cube cube c	noFrost in fridge and freezer	
hyperfeak         1 hyperfeak drawer           Product Sections         1 a beerage drawer           Product Split/s         60           SuperCol Turk         60           Type fortrol         60           SuperCol Turk	Home Connect	
CY: FATUCE       ILD         Product highlights       ILD         superCol function       ILD         superCol function       ILD         Type of control       ILD         Number of shelves       ILD         SuperCol function       ILD         Sumber of adjustable shelves       ILD         Sumber of adjustable shelves       ILD         Sutte shelves in fidgle       ILD         Number of adjustable shelves       ILD         Warning signal door gen       ILD         Warning signal door gen       ILD         Superfreeze function       ILD         Engretarture diptable in freezer       ILD         Number of ice cube trays       ILD         Red freezer dravers       ILD         Number of feezer dravers       ILD         Red freezer dravers       ILD         Red freezer dravers       ILD         Red freezer dravers       ILD         Energy dificiency class       ILD         Energy dificiency (litres)       ILD     <	FOOD FRESHNESS SYSTEM	
Product highlightsLEDsuperCool functionIIII ConstructionType of contolIIIII ConstructionNumber of shelves5Number of shelvesIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	hyperFresh	
super Col functionImage ControlType of controlElectronicNumber of shelves5Number of adjustable shelves4Botte shelves in fidgeBetwerage drawerNumber of odin bir sh shelves6Temperature displayOigital LEDWarning signal door openImage drawerSuper Freeze functionImage drawerSuper Freezer drawersImage drawerSuper Freezer drawersImage drawerSuper Streezer drawersImage drawerStreezer drawersImage drawerSuper Streezer drawersImage drawerStreezer drawersImage drawerStreezer drawersImage drawerStreezer drawersImage drawerStreezer drawersImage drawerStreezer drawersImage d	KEY FEATURES – FRIDGE SECTION	
Type of controlElectronicNumber of shelves5Number of adjustable shelves6Botte shelves in frågeBeverage draverNumber of door bins / shelves6Temperature display0 bigtal LEDWarning signal door open0REY FAURES - FREEZER SECTION0Temperature display freezer0Number of ice cube trays0Number of ice cube trays0Number of ice cube trays0Number of ice cube trays0Number of ice cube trays0Stererer dravers3ADDITIONAL INFORMATION0Energy endicion classical (itres)320Total art capacity (itres)0Refriger and end capacity (itres)5722Refriger and end capacity (itres)0Sterer dravers0Sterer dravers0Sterer dravers320Total art capacity (itres)0Sterer dravers0Sterer dravers0Sterer dravers0Sterer dravers0Sterer dravers320Total art capacity (itres)0Sterer dravers0Sterer0Sterer0Sterer0Sterer0Sterer0Sterer0Sterer0Sterer0Sterer0Sterer0Sterer0Sterer0Sterer0Sterer<	Product highlights	LED
Number of shelvesSNumber of adjustable shelves6Botte shelves in fridgeBeverage draverNumber of door bins / shelves6Temperature display0Warning signal door open0KEY FEATURES - FREEZER SECTION0Struere adjustable in freezer0Number of ice cube trays0Itemperature display freezer0Number of ice cube trays0Ite dispenser features-Number of ice cube trays3ADDITONAL INFORMATION320Energy efficiency class5/20Energy efficiency class5/20Refrigeration (itres)320Total net capacity (itres)5/21Refrigeration (itres)5/21Refrigeration (itres)5/21Noise level (dis (A trays)5/21Refrigeration (itres)5/21Herdigeration (itres)5/21Herdigeration (itres)5/21Refrigeration (itre	superCool function	
Number of adjustable shelves4Bottle shelves in fridge6Bottle shelves in fridge6Number of door bin's / shelves6Temperature displayDigital LEDWarning signal door open•KEY FEATURES - FREEZER SECTION•Superfreeze function•Temperature adjustable in freezer•Number of ice cube trajs•Led dispense freatures3Number of freezer drawers3ADDITONAL INFORMATION•Energy officiency class6Energy onsumption' (kWhannum)220Total net capacity (litres)522Refrigerator net capacity (litres)522Refrigerator net capacity (litres)512Noise level (dB (A te 1pW)39Noise level (dB (A te 1pW)39Noise level (ds Sin Cute)3Vich of product (mm)6With of product (mm)1830With of product (mm)905	Type of control	Electronic
Additional constrained         Beverage drawer           Number of door bins / shelves         6           Temperature display         0.0101           Warning signal door open         0.0101           KEY FEATURES - FREEZER SECTION         0.0000           Sumber of door bins / shelves         0.0000           Number of could target status         0.0000           Temperature adjustable in freezer         0.00000           Number of could target status         0.000000           Ice dispenser features         -           Number of the could target status         0.00000000000000000000000000000000000	Number of shelves	5
Number of door bins / shelves6Tempeture displayDigital LEDWarning signal door openDigital LEDKar FATURES - FREEZER SCITIONIsuperfreeze functionISuperfreeze functionITemperature adjustable in freezerINumber of ice cube traysICube dispenser features-Number of ice cube traysIConsumption ice (Whannum)IEnergy efficiency classIEnergy efficiency classICube trays (Vitres)ICube trays (Vitres)INote class (Vitr	Number of adjustable shelves	4
Temperature displayDigital LEDWarning signal door openKEY FEATURES - FREEZER SECTIONSuperfreezer functionTemperature adjustable in freezerTemperature adjustable in freezerNumber of ice cube traysIce disperser featuresNumber of recere draversADDITONAL INFORMATIONEnergy efficiency classEnergy efficiency classEnergy efficiency (litres)Freezer et cayacity (litres)Freezer et cayacity (litres)Freezer et cayacity (litres)Inite capacity (litres)Noise level (dis [A] re 1pW)Noise level (dis [A] re 1pW)Noise level (dis [A] re tow)Noise level (dis [A] re tow) </td <td>Bottle shelves in fridge</td> <td>Beverage drawer</td>	Bottle shelves in fridge	Beverage drawer
Warning signal door openImage: Constraint of the section	Number of door bins / shelves	6
KEY FEATURES - FREEZER SECTIONsuperfreeze functionITemperature adjustable in freezerINumber of ice cube traysILed ispenser features-Number of freezer drawers3ADDITIONAL INFORMATIONIEnergy efficiency classIEnergy efficiency classIEnergy efficiency (litres)220Total net capacity (litres)572Refrigerator net capacity (litres)171Climate class'SN-TNoise level (dB [A] re 1pW)39Noise level (dassCHeight of product (mm)1830Width of product (mm)905	Temperature display	Digital LED
superFreeze functionImage: SuperFreeze functionTemperature adjustable in freezerImage: SuperFreeze functionNumber of ice cube traysImage: SuperFreeze functionIce dispenser featuresImage: SuperFreeze functionNumber of freezer drawersImage: SuperFreeze functionADDITIONAL INFORMATIONImage: SuperFreeze functionEnergy enfliciency classImage: SuperFreeze functionEnergy enfliciency (litres)Image: SuperFreeze functionTotal net capacity (litres)Image: SuperFreeze functionFreezer net capacity (litres)Image: SuperFreeze functionNoise level (dB [A] re tpW)Image: SuperFreeze functionNoise level (dB [A] re tpW)Image: SuperFreeze functionNoise level functionImage: SuperFreeze functionAdditional accessories includedImage: SuperFreeze functionHeight of product (mm)Image: SuperFreeze functionWith of product (mm)Image: SuperFreeze function	Warning signal door open	
Important adjustable in freezerImportant adjustable in freezerNumber of ice cube traysImportant adjustable in freezerNumber of ice cube traysImportant adjustable in freezerNumber of freezer drawers3ADDITIONAL INFORMATIONImportant adjustable in freezerEnergy efficiency classImportant adjustable in freezerEnergy consumption <sup>1</sup> (kWh/lannum)320Total net capacity (litres)572Refrigerator net capacity (litres)572Refrigerator net capacity (litres)111Freezer net capacity (litres)SN-TNoise level (dB [A] re tpW)39Noise level (dB [A] re tpW)39Noise level (dB [A] re tpW)CAdditional accessories included3 x egg traysHeight of product (mm)1830Width of product (mm)905	KEY FEATURES – FREEZER SECTION	
Imperation         Imperation           Number of ice cube trays         Twist ice box           Lee dispenser features         -           Number of freezer drawers         3           ADDITIONAL INFORMATION         -           Energy efficiency class         E           Energy consumption <sup>1</sup> (kWhannum)         320           Total net capacity (litres)         572           Refrigerator net capacity (litres)         572           Refrigerator net capacity (litres)         101           Freezer net capacity (litres)         572           Refrigerator net capacity (litres)         572           Refrigerator net capacity (litres)         30           Noise level (dB [A] re tpW)         39           Noise level (dB [A] re tpW)         39           Noise level (dass         C           Additional accessories included         3 x egg trays           Height of product (mm)         1830	superFreeze function	
Ic dispenser features-Number of freezer drawers3ADDITIONAL INFORMATIONEnergy efficiency class666Energy consumption' (kWh/annum)320Total net capacity (litres)572Refrigerator net capacity (litres)401Freezer net capacity (litres)171Climate class²SN-TNoise level (dB [A] re tpW)39Noise level (dBsCAdditional accessories included3 x egg traysHeight of product (mm)905	Temperature adjustable in freezer	
Number of freezer drawers       3         ADDITIONAL INFORMATION	Number of ice cube trays	Twist ice box
ADDITIONAL INFORMATION         Energy efficiency class	Ice dispenser features	
Energy efficiency classEEnergy consumption' (kWhanum)320Total net capacity (litres)320Refrigerator net capacity (litres)401Freezer net capacity (litres)401Climate class <sup>2</sup> 572Noise level (AB [A] re 1pW)384Noise level (AB [A] re 1pW)CAdditional accessories included3 x engg traysHeight of product (mm)1830With of product (mm)905	Number of freezer drawers	3
Energy consumption <sup>1</sup> (kWh/annum)       320         Total net capacity (litres)       572         Refrigerator net capacity (litres)       401         Freezer net capacity (litres)       401         Climate class <sup>2</sup> 5N-T         Noise level (dB [A] re pW)       39         Noise level class       C         Additional accessories included       3× engrtavs         Height of product (mm)       1830	ADDITIONAL INFORMATION	
Total net capacity (litres)     572       Refrigerator net capacity (litres)     401       Freezer net capacity (litres)     401       Climate class <sup>2</sup> 171       Climate class <sup>3</sup> SN-T       Noise level (dB [A] re 1pW)     39       Noise level class     C       Additional accessories included     3 x engr trays       Height of product (mm)     1830	Energy efficiency class	
Refrigerator net capacity (litres)     401       Freezer net capacity (litres)     171       Climate class <sup>2</sup> SN-T       Noise level (dB [A] re 1pW)     39       Noise level class     C       Additional accessories included     3 x engr trays       Height of product (mm)     1830       Width of product (mm)     905		
Freezer net capacity (litres)     171       Climate class <sup>2</sup> SN-T       Noise level (dB [A] re 1pW)     39       Noise level class     C       Additional accessories included     3 × egg trays       Height of product (mm)     1830       Width of product (mm)     905		
Climate class <sup>2</sup> SN-T       Noise level (dB [A] re 1pW)     39       Noise level class     C       Additional accessories included     3 x egg trays       Height of product (mm)     1830       Width of product (mm)     905	Refrigerator net capacity (litres)	
Noise level (dB [A] re 1pW)     39       Noise level class     C       Additional accessories included     3 x egg trays       Height of product (mm)     1830       Width of product (mm)     905		
Noise level class         C           Additional accessories included         3 x egg trays           Height of product (mm)         1830           Width of product (mm)         905	Climate class <sup>2</sup>	
Additional accessories included     3 x egg trays       Height of product (mm)     1830       Width of product (mm)     905	Noise level (dB [A] re 1pW)	39
Height of product (mm)     1830       Width of product (mm)     905	Noise level class	C
Width of product (mm) 905	Additional accessories included	3 x egg trays
	Height of product (mm)	1830
Depth of product (mm) 736	Width of product (mm)	905
	Depth of product (mm)	736

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Actual energy consumption will depend on how the appliance is used and where it is located.

 $^2$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

#### For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. 214

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

### Q 700 KF96DPXEA

Multi Door / American Style fridge freezer Black stainless steel




#### Multi Door / American Style fridge freezer specifications

APPLIANCE TYP Design family	
3 7	
Model number DESIGN FEATUR	
Colour of door	
Colour of side p	aneis
Style of handle	
Colour of handl	
noFrost in fridg	e and freezer
Home Connect	
FOOD FRESHNE	ISS SYSTEM
hyperFresh	
KEY FEATURES	- FRIDGE SECTION
Product highlig	
superCool funct	
Type of control	
Number of shel	VPS
Number of adju	
Bottle shelves in	
Number of doo	
Temperature di	splay
Warning signal	door open
KEY FEATURES	– FREEZER SECTION
superFreeze fur	nction
Temperature ad	ljustable in freezer
Number of ice of	ube trays
Ice dispenser fe	atures
Number of free	zer drawers
ADDITIONAL IN	FORMATION
Energy efficient	cy class
Energy consum	ption <sup>1</sup> (kWh/annum)
Total net capaci	ty (litres)
Refrigerator net	t capacity (litres)
	acity (litres)
Freezer net cap	
Freezer net cap Climate class <sup>2</sup>	
	[A] re 1pW)
Climate class <sup>2</sup>	
Climate class <sup>2</sup> Noise level (dB Noise level class	
Climate class <sup>2</sup> Noise level (dB Noise level class	s ssories included
Climate class <sup>2</sup> Noise level (dB Noise level class Additional acce	s ssories included Let (mm)

Actual energy consumption will depend on how the appliance is used and where it is located. <sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

#### Multi Door / American Style fridge freezers | Freestanding cooling

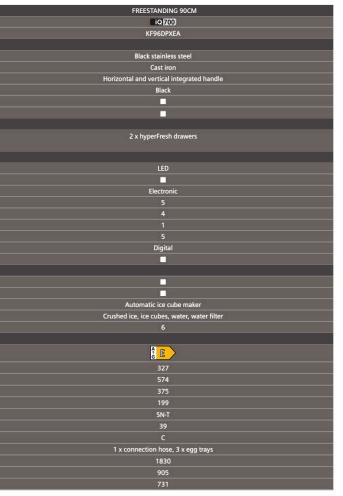







#### Multi Door / American Style fridge freezer specifications

APPLIANCE TYPE	FREESTANDING 90CM
Design family	<b>fQ</b> 500
Model number	KF96NAXEAG
DESIGN FEATURES	
Colour of door panels	Black stainless steel
Colour of sides	Cast iron
Style of handle	Horizontal and vertical integrated handle
Colour of handle	Black
noFrost in fridge and freezer	
Home Connect	
FOOD FRESHNESS SYSTEM	
hyperFresh	2 x hyperFresh drawers
KEY FEATURES – FRIDGE SECTION	
Product highlights	LED
superCool function	
Type of control	Electronic
Number of shelves	4
Number of adjustable shelves	3
Shelves for bottles	-
Number of door bins / shelves	5
Temperature display	Digital
Warning signal door open	-
KEY FEATURES – FREEZER SECTION	
superFreeze function	
Temperature adjustable in freezer	
Number of ice cube trays	1
Ice dispenser features	-
Number of freezer drawers	6
ADDITIONAL INFORMATION	
Energy efficiency class	
Energy consumption <sup>1</sup> (kWh/annum)	333
Total net capacity (litres)	605
Refrigerator net capacity (litres)	405
Freezer net capacity (litres)	200
Climate class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	38
Noise level class	С
Additional accessories included	3 x egg trays
Height of product (mm)	1830
Width of product (mm)	905
	731

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

#### For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. 216

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

#### Multi Door / American Style fridge freezer specifications

APPLIANCE TYPE	FREESTANDING 90CM
Design family	Q 300
Model number	KF96NVPEAG
DESIGN FEATURES	
Colour of door panels	Stainless steel
Colour of sides	Chrome Inox-Metallic
Style of handle	Horizontal and vertical integrated handle
Colour of handle	Black
noFrost in fridge and freezer	
Home Connect	-
FOOD FRESHNESS SYSTEM	
hyperFresh	2 x hyperFresh drawers
KEY FEATURES – FRIDGE SECTION	
Product highlights	LED
superCool function	
Type of control	Electronic
Number of shelves	3
Number of adjustable shelves	2
Shelves for bottles	-
Number of door bins / shelves	5
Temperature display	Digital
Warning signal door open	
KEY FEATURES – FREEZER SECTION	
superFreeze function	
Temperature adjustable in freezer	
Number of ice cube trays	1
Ice dispenser features	-
Number of freezer drawers	6
ADDITIONAL INFORMATION	
Energy efficiency class	
Energy consumption <sup>1</sup> (kWh/annum)	333
Total net capacity (litres)	605
Refrigerator net capacity (litres)	405
Freezer net capacity (litres)	200
Climate class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	38
Noise level class	C
Additional accessories included	3 x egg trays
Height of product (mm)	1830
Width of product (mm)	905
Depth of product (mm)	731

<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C. Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.



### Traditional American Style fridge freezer





Model shown: KA93GAIDP American Style fridge freezer

### iQ 500 KA93GAIDP

American Style fridge freezer



American Style fridge freezer specifications

APPLIANCE TYPE	FREESTANDING 90CM
Design family	iQ 500
Model number	KA93GAIDP
DESIGN FEATURES	
Colour of door panels	Stainless steel
Colour of sides	Grey
Style of handle	Vertical bar handle
Colour of handle	Silver
noFrost in fridge and freezer	
Home Connect	e
FOOD FRESHNESS SYSTEM	
hyperFresh	1 x vegetable box
KEY FEATURES – FRIDGE SECTION	
Product highlights	LED
superCool function	
Type of control	Electronic
Number of shelves	5
Number of adjustable shelves	0
Shelves for bottles	
Number of door bins / shelves	5
Temperature display	Digital
Warning signal door open	
KEY FEATURES – FREEZER SECTION	
superFreeze function	
Temperature adjustable in freezer	
Number of ice cube trays	Automatic ice maker
Ice dispenser features	Crushed ice, ice cubes, water filter
Number of freezer drawers	2
ADDITIONAL INFORMATION	
Energy efficiency class	
Energy consumption <sup>1</sup> (kWh/annum)	323
Total net capacity (litres)	560
Refrigerator net capacity (litres)	369
Freezer net capacity (litres)	.191
Climate class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	42
Noise level class	D
Additional accessories included	1 x connection hose, 3 x egg trays
Height of product (mm)	1787
Width of product (mm)	908
Depth of product (mm)	707
Yes, model has this feature. – Feature not available for this model.	
<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.	
$^{2}$ Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = design	ned to operate in ambient temperature of +18°C to 43°C.
Data valid in this table as of April 2024. Subject to modification without prior notice.	
*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.	

For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

Available from May 2024



### Freestanding fridge freezers

#### iQ 300 KG49NXXDF

Freestanding fridge freezer Black steel





For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

#### Fridge freezers | Freestanding cooling





#### Freestanding fridge freezer noFrost specifications

APPLIANCE TIPE     PREESTANDING PRIDE PREEER NUMPOSI       Design family     0 800       Model number     KG49NXXDF       DESIGN FEATURES     Cast iron       Style of handle     Cast iron       Style of handle     Integrated vertical handle       Colour of sides     Cast iron       Style of handle     -       Infidge and freezer     -       Home Connect     -       FOOD FRESHNESS SYSTEM     -       hyperFresh     2 x hyperFresh drawers       KEY FEATURES - FRIDGE SECTION     -       Light     LED       superCool function     -       Type of control     Electronic       Number of shelves     5       Number of adjustable shelves     3       Number of adjustable shelves     3       Number of shelves     Safety glass       Temperature display     Digital LED       Warning signal door open     -       Energy officiency class     -       Number of ice cube trays     1       Bottle shelves in fridge     3       ADDITIONAL INFORMATION     -       Energy consumption (Whylannum)     223       Total net capacity (litres)     129       Clinate Class'     Sk-15       Nobie level (das     8 <td< th=""><th></th><th>FREESTANDING FRIDGE FREEZER NOFROST</th></td<>		FREESTANDING FRIDGE FREEZER NOFROST
Model numberKG49NXXDFDESIGN FEATURESColour of door panelsBlack stainless steelColour of sidesCast ironStyle of handleIntegrated vertical handleColour of handle-nofrost in fridge and freezer-Home Connect-FOOD FRESHNESS SYSTEM-PODE RESHNESS SYSTEM-SuperCool function-LightLEDsuperCool function-Type of controlElectronicNumber of shelves3Number of door bins / shelves3Number of door bins / shelves-Stelt shelves in fridge-Bottle shelves in fridge-REY FEATURES - FREEZER SECTION-SuperCool function-Type of shelves3Number of door bins / shelves4Type of shelves-Suming signal door open-Bottle shelves in fridge-Bottle shelves in fridge-ADDITIONAL INFORMATION-Energy efficiency class-Energy efficiency class-Energy efficiency class-Energy efficiency class-Energy efficiency class-Climate Class <sup>2</sup> SN-TNoise level (dB [A] re 1pW)-Noise level class-Additional accessories included-Yeight of product (mm)-Yeight of product (mm)-Yeight of product (mm)-Yeight of product (		A LONG MANAGEMENT
DESIGN FEATURES         Colour of door panels       Black stainless steel         Colour of sides       Cest iron         Style of handle       -         colour of handle       -         noFrost in fridge and freezer       -         Home Connect       -         FOOD FRESHNESS SYSTEM       -         hyperFresh       2 x hyperFresh drawers         KEY FEATURES - FRIDGE SECTION       LED         Light       LED         superCool function       -         Type of control       Electronic         Number of shelves       3         Number of adjustable shelves       3         Number of adjustable shelves       3         Number of adjustable shelves       -         SuperFreeze function       -         Type of shelves       -         SuperFreeze function       -         Temperature display       Digital LED         Warning signal door open       -         Bottle shelves in fridge       -         Number of ice cube trays       1         Bottle shelves in fridge       -         Number of ice cube trays       1         Bottle shelves in fridge       -         Colan et capacit	5 7	
Colour of door panelsBlack stainless steelColour of sidesCast ironStyle of handle-colour of handle-noFrost in fridge and freezer-Home Connect-FOOD FRESHNESS SYSTEM-hyperFresh2 x hyperFresh drawersEVEY FEATURES - FRIDGE SECTION-LightLEDsuperCool function-Type of controlElectronicNumber of shelves5Number of shelves3Number of adjustable shelves3Number of adjustable shelves3Ver FEATURES - FREIDGE SECTION-Electronic-SuperCool function-Type of controlElectronicNumber of adjustable shelves3Number of adjustable shelves3Number of door bins / shelves4Type of shelvesSafety glassTemperature displayDigital LEDWarning signal door open-superfreeze function-Temperature adjustable in freezer-Number of ice cube trays1Bottle shelves in fridge3ADDITIONALINOSINCION-Energy efficiency classEnergy efficiency classEnergy efficiency class-Energy efficiency classBAdditional accessories included3 x egg traysNoise level (dis [A] re 1pW)35Noise level classBAdditional accessories included3 x egg traysHeight of product (		KG49NXXDF
Colour of sidesCast ironStyle of handleIntegrated vertical handleColour of handle-noFrost in fridge and freezer-Home Connect-FOOD FRESHINESS SYSTEM-HyperFresh2 x hyperFresh drawersKEY FEATURES - FRIDGE SECTION-LightLEDsuperCool function-Type of controlElectronicNumber of shelves5Number of dour bins / shelves3Toppe of dour bins / shelves-Toppe of dour bins / shelves-Bottle shelves in fridge-KEY FEATURES - FREZER SECTION-Warning signal door open-Bottle shelves in fridge-KEY FEATURES - FREZER SECTION-superfreeze function-Temperature displayDigital LEDWarning signal door open-Bottle shelves in fridge-Superfreeze function-Temperature adjustable in freezer-Number of ice cube trays1Bottle shelves in fridge-ADDITIONAL INFORMATION-Energy consumption' (kWh/annum)223Total net capacity (litres)129Climate Class'SN-TNoise level (dis [A] re 1pW)35Noise level classBAdditional accessories included3 x egg traysHeight of product (mm)2030Width of product (mm)700		
Style of handleIntegrated vertical handleColour of handle-noFrost in fridge and freezerIHome Connect-FOOD FRESHNESS SYSTEM2 x hyperFresh drawershyperFresh2 x hyperFresh drawersKEY FEATURES - FRIDGE SECTIONIEDLightLEDsuperCool functionIElectronicType of controlElectronicNumber of shelves3Number of shelves3Number of odro bins / shelves4Type of controlDigital LEDWarning signal door openIElectronicBottle shelves in fridgeIElectonicKEY FEATURES - FRIEZER SECTIONIElectonicSuperFreeze functionIBottle shelves in fridgeIBottle shelves in fridgeIBottle shelves in fridgeISuperFreeze functionITemperature adjustable in freezerINumber of ice cube traysIBottle shelves in fridgeIBottle shelves in fridgeIBottle shelves in fridgeIConservert (litres)I29Clinate Class <sup>I</sup> SiNoise level (dB [A] re 1pW)INoise level (dB [A] re 1pW)I × kee cube trayNoise level (assBAdditional accessories includedI × kee cube trayHeight of product (mm)II × kee cube trayWidth of product (mm)II × keeWidth of product (mm)II × keeWidth of product (mm)I <td></td> <td></td>		
Colour of handle-noFrost in fridge and freezer-Home Connect-FOOD FRESHNESS SYSTEM2 x hyperFresh drawershyperFresh2 x hyperFresh drawersKEY FEATURES - FRIDGE SECTION-LightLEDsuperCool function-Type of controlElectronicNumber of shelves3Number of adjustable shelves3Number of dor bins / shelves4Type of shelves-Bitle shelves in fridge-Bitle shelves in fridge-SuperFreeze function-Temperature digslayDigital LEDWarning signal door open-Bitle shelves in fridge-SuperFreeze function-Temperature adjustable in freezer-Number of ice cube trays1Bottle shelves in fridge3ADDITIONAL INFORMATION223Energy consumption' (kWh/annum)223Total net capacity (litres)1.29Climate Class'BAdditional accessories included3 x egg trays1 x ice cube tray1 x ice cube trayAdditional accessories included3 x egg trays1 x ice cube tray1 x ice cube trayAdditional accessories included3 x egg trays1 x ice cube tray1 x ice cube tray1 x bottle support1 x ice cube tray <td></td> <td></td>		
noFrost in fridge and freezerImage: ConnectHome Connect-FOOD FRESHNESS SYSTEM2 x hyperFresh drawershyperFresh2 x hyperFresh drawersLightLEDsuperCool functionImage: Connect Co	•	Integrated vertical handle
Home Connect-FOOD FRESHNESS SYSTEMhyperFreshLight2 x hyperFresh drawersLightLEDsuperCool functionIType of controlElectronicNumber of adjustable shelves3Number of dijustable shelves4Type of shelvesSafety glassTemperature displayDoigital LEDWarning signal door openIBottle shelves in fridgeIKEY FEATURES - FREZER SECTIONISuperForeze functionITemperature displayDoigital LEDWarning signal door openIBottle shelves in fridgeIKEY FEATURES - FREZER SECTIONISuperFreeze functionITemperature adjustable in freezerINumber of ic cube trays1Bottle shelves in fridge3ADDITIONAL INFORMATION223Energy consumption' (kWh/annum)223Total net capacity (litres)1440Freezer net capacity (litres)129Climate Class'SN-TNoise level (dB [A] re IPW)35Noise level (das8Additional accessories included3 x egg traysHeight of product (mm)2030Width of product (mm)700		-
FOOD FRESHNESS SYSTEM         hyperFresh       2 x hyperFresh drawers         KEY FEATURES - FRIDGE SECTION       LED         Light       LED         superCool function       IEd         Type of control       Electronic         Number of shelves       5         Number of dijustable shelves       3         Number of door bins / shelves       4         Type of shelves       Safety glass         Temperature display       Digital LED         Warning signal door open       Image: Control         Bottle shelves in fridge       Image: Control         KEY FEATURES - FREEZER SECTION       Image: Control         superfreeze function       Image: Control         Temperature adjustable in freezer       Image: Control         Number of ice cube trays       1         Bottle shelves in fridge       Image: Control         ADDITIONAL INFORMATION       223         Energy consumption' (kWh/annum)       223         Total net capacity (litres)       440         Freezer net capacity (litres)       SN-T         Noise level (dB [A] re 1pW)       35         Noise level (dB [A] re 1pW)       35         Noise level (dB [A] re 1pW)       B         Noise level		
hyperFresh2 x hyperFresh drawersKEY FEATURES - FRIDGE SECTIONLightLEDsuperCool functionIEDsuperCool functionElectronicNumber of shelves5Number of shelves3Number of dajustable shelves3Number of dajustable shelvesSafety glassType of shelvesSafety glassTemperature displayDigital LEDWarning signal door openImage and the second s		-
KEY FEATURES - FRIDCE SECTION       Light     LED       superCool function     IE       Type of control     Electronic       Number of shelves     3       Number of adjustable shelves     3       Number of door bins / shelves     4       Type of shelves     Safety glass       Temperature display     Digital LED       Warning signal door open     Image: Control Con		
LightLEDsuperCool functionIEDType of controlElectronicNumber of shelves5Number of dijustable shelves3Number of door bins / shelves4Type of shelvesSafety glassTemperature displayDigital LEDWarning signal door openImage of the set of	hyperFresh	2 x hyperFresh drawers
SuperCool functionImage: Constraint of the sector of the sect	KEY FEATURES – FRIDGE SECTION	
Type of controlElectronicNumber of shelves5Number of door bins / shelves3Number of door bins / shelves4Type of shelvesSafety glassTemperature displayDigital LEDWarning signal door openImage: Safety glassBottle shelves in fridgeImage: Safety glassSuperFreeze functionImage: Safety glassTemperature adjustable in freezerImage: Safety glassNumber of ice cube trays1Bottle shelves in fridge3ADDITIONAL INFORMATIONImage: Safety glassEnergy efficiency classImage: Safety glassItal net capacity (litres)129Climate Class'SN-TNoise level (dB [A] re 1pW)35Noise level classBAdditional accessories included3 x egg traysHeight of product (mm)2030Width of product (mm)700	Light	LED
Number of shelves5Number of adjustable shelves3Number of door bins / shelves4Type of shelvesSafety glassTemperature displayDigital LEDWarning signal door open•Bottle shelves in fridge•REY FEATURES – FREEZER SECTIONsuperFreeze function•Temperature adjustable in freezer•Number of ice cube trays1Bottle shelves in fridge3ADDITIONAL INFORMATION•Energy efficiency class•Energy consumption' (kWh/annum)223Total net capacity (litres)129Climate Class'SN-TNoise level (dB [A] re 1pW)35Noise level (dB [A] re 1pW)35Noise level (dB [A] re topW)35Noise level (da Iss8Additional accessories included3 x egg traysHeight of product (mm)2030Width of product (mm)700	superCool function	
Number of adjustable shelves3Number of adjustable shelves4Type of shelves4Type of shelvesSafety glassTemperature displayDigital LEDWarning signal door open•Bottle shelves in fridge•KeY FEATURES – FREEZER SECTION•superfreeze function•Temperature adjustable in freezer•Number of ice cube trays1Bottle shelves in fridge3ADDITONAL INFORMATION•Energy efficiency class•Energy consumption' (kWh/annum)223Total net capacity (litres)129Climate Class'SN-TNoise level (dla [A] re tpW)35Noise level (dla [A] re tpW)35Noise level (dlass8Additional accessories included3 x egg traysHeight of product (mm)2030Width of product (mm)700	Type of control	Electronic
Number of door bins / shelves4Type of shelvesSafety glassTemperature displayDigital LEDWarning signal door openImage: Constraint of the system of th	Number of shelves	5
Type of shelvesSafety glassTemperature displayDigital LEDWarning signal door openImage: Constraint of the shelpes in fridgeBottle shelves in fridgeImage: Constraint of the shelpes in fridgeKEY FEATURES – FREEZER SECTIONImage: Constraint of the shelpes in fridgeSuperFreeze functionImage: Constraint of the shelpes in fridgeNumber of ice cube trays1Bottle shelves in fridge3ADDITIONAL INFORMATIONImage: Constraint of the shelpes in fridgeEnergy efficiency classImage: Constraint of the shelpes in fridgeEnergy consumption' (kWh/annum)223Total net capacity (litres)440Freezer net capacity (litres)129Climate Class²SN-TNoise level (dB [A] re 1pW)35Noise level (dassBAdditional accessories included3 x egg trays 1 x ice cube tray 1 x bottle supportHeight of product (mm)2030Width of product (mm)700	Number of adjustable shelves	3
Imperature display     Digital LED       Warning signal door open     Imperature display       Bottle shelves in fridge     Imperature display       SuperFreeze function     Imperature adjustable in freezer       Number of ice cube trays     1       Bottle shelves in fridge     3       ADDITIONAL INFORMATION     Imperature adjustable in freezer       Energy efficiency class     Imperature adjustable in freezer       Energy consumption* (kWh/annum)     223       Total net capacity (litres)     440       Freezer net capacity (litres)     129       Climate Class*     SN-T       Noise level (dB [A] re 1pW)     35       Noise level (das     8       Additional accessories included     3 x egg trays       Height of product (mm)     2030       Width of product (mm)     700	Number of door bins / shelves	4
Warning signal door open       Image: Constraint of the sector open         Bottle shelves in fridge       Image: Constraint open open open open open open open open	Type of shelves	Safety glass
Bottle shelves in fridge       Image: Constraint of the sector of the sect	Temperature display	Digital LED
KEY FEATURES - FREEZER SECTION         superFreeze function         Temperature adjustable in freezer         Number of ice cube trays         1         Bottle shelves in fridge         3         ADDITIONAL INFORMATION         Energy efficiency class         Energy efficiency class         Interpreting on sumption ' (kWh/annum)         223         Total net capacity (litres)         (litres)         Iclimate Class'         Noise level (dB [A] re 1pW)         0 Sise level class         Additional accessories included         3 x egg trays         1 x ice cube tray         Height of product (mm)         2030         Width of product (mm)	Warning signal door open	
superFreeze function     Image: SuperFreeze function       Temperature adjustable in freezer     Image: SuperFreeze function       Number of ice cube trays     1       Bottle shelves in fridge     3       ADDITIONAL INFORMATION     Image: SuperFreeze function       Energy efficiency class     Image: SuperFreeze function       Energy consumption' (kWh/annum)     223       Total net capacity (litres)     440       Freezer net capacity (litres)     129       Climate Class'     SN-T       Noise level (dB [A] re 1pW)     35       Noise level (dB [A] re 1pW)     35       Additional accessories included     3 x egg trays 1 x ice cube tray 1 x ice cube tray       Height of product (mm)     2030       Width of product (mm)     700	Bottle shelves in fridge	
Temperature adjustable in freezer     I       Number of ice cube trays     1       Bottle shelves in fridge     3       ADDITIONAL INFORMATION     3       Energy efficiency class     I       Energy consumption' (kWh/annum)     223       Total net capacity (litres)     440       Freezer net capacity (litres)     129       Climate Class <sup>2</sup> SN-T       Noise level (dB [A] re 1pW)     35       Noise level (dass     B       Additional accessories included     3 x egg trays       1 x ice cube tray     1 x ice cube tray       Height of product (mm)     2030       Width of product (mm)     700	KEY FEATURES – FREEZER SECTION	
Number of ice cube trays     1       Bottle shelves in fridge     3       ADDITIONAL INFORMATION     3       Energy efficiency class     Image: Display class       Energy consumption* (kWh/annum)     223       Total net capacity (litres)     440       Freezer net capacity (litres)     129       Climate Class <sup>2</sup> SN-T       Noise level (dB [A] re 1pW)     35       Noise level (dass     8       Additional accessories included     3 x egg trays       1 x ice cube tray     1 x bottle support       Height of product (mm)     2030       Width of product (mm)     700	superFreeze function	
Bottle shelves in fridge       3         ADDITIONAL INFORMATION       Image: Constraint of the system of the	Temperature adjustable in freezer	
ADDITIONAL INFORMATION         Energy efficiency class         Energy consumption' (kWh/annum)         223         Total net capacity (litres)         440         Freezer net capacity (litres)         129         Climate Class <sup>2</sup> SN-T         Noise level (dB [A] re 1pW)         35         Noise level class         Additional accessories included         3 x egg trays         1 x ice cube tray         1 x obtile support         Height of product (mm)       2030         Width of product (mm)       700	Number of ice cube trays	1
Energy efficiency class     D       Energy consumption' (kWh/annum)     223       Total net capacity (litres)     440       Freezer net capacity (litres)     129       Climate Class <sup>2</sup> SN-T       Noise level (dB [A] re 1pW)     35       Noise level class     B       Additional accessories included     3 x egg trays       1 x ice cube tray     1 x ice cube tray       1 x bottle support     2030       Width of product (mm)     700	Bottle shelves in fridge	3
Energy consumption* (kWh/annum)     223       Total net capacity (litres)     440       Freezer net capacity (litres)     129       Climate Class <sup>2</sup> SN-T       Noise level (dB [A] re 1pW)     35       Noise level class     B       Additional accessories included     3 x egg trays 1 x ice cube tray 1 x bottle support       Height of product (mm)     2030       Width of product (mm)     700	ADDITIONAL INFORMATION	
Total net capacity (litres)     440       Freezer net capacity (litres)     129       Climate Class <sup>2</sup> SN-T       Noise level (dB [A] re 1pW)     35       Noise level (dB [A] re 1pW)     35       Additional accessories included     3 x egg trays       1 x ice cube tray     1 x ice cube tray       Height of product (mm)     2030       Width of product (mm)     700	Energy efficiency class	
Freezer net capacity (litres)     129       Climate Class <sup>2</sup> SN-T       Noise level (dB [A] re 1pW)     35       Noise level class     B       Additional accessories included     3 x egg trays       1 x ice cube tray     1 x coce tray       Height of product (mm)     2030       Width of product (mm)     700	Energy consumption <sup>1</sup> (kWh/annum)	223
Climate Class <sup>2</sup> SN-T       Noise level (dB [A] re 1pW)     35       Noise level class     B       Additional accessories included     3 x egg trays       1 x ice cube tray     1 x cocube tray       Height of product (mm)     2030       Width of product (mm)     700	Total net capacity (litres)	440
Noise level (dB [A] re 1pW)     35       Noise level class     B       Additional accessories included     3 x egg trays 1 x ice cube tray 1 x bottle support       Height of product (mm)     2030       Width of product (mm)     700	Freezer net capacity (litres)	129
Noise level class     B       Additional accessories included     3 x egg trays       1 x ice cube tray     1 x ice cube tray       1 x bottle support     2030       Width of product (mm)     700	Climate Class <sup>2</sup>	SN-T
Additional accessories included     3 x egg trays       1 x ice cube tray     1 x coube tray       1 x bottle support     2030       Width of product (mm)     700	Noise level (dB [A] re 1pW)	35
1 x ice cube tray       1 x ice cube tray       1 x bottle support       Height of product (mm)       2030       Width of product (mm)       700	Noise level class	в
Width of product (mm) 700	Additional accessories included	1 x ice cube tray
	Height of product (mm)	2030
Depth of product (mm) 667	Width of product (mm)	700
	Depth of product (mm)	667

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located. <sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

5 year warranty

25000

A. Service 

5 year warranty

\*\*\*

(cent)

DE

II ANTI

210

L





Freestanding fridge freezer

oFrost specifications			
APPLIANCE TYPE		FREESTANDING FRIDGE FREEZERS NOFROST	
Design family	iQ 300	iQ 500	iQ 500
Model number	KG49NXIDF	KG39NAIAT	KG39NEXBF
DESIGN FEATURES			
Colour of door panels	Stainless steel	Stainless steel	Black stainless steel
Colour of sides	Pearl grey	Pearl grey	Cast iron
Style of handle	Integrated vertical handle	Vertical bar handle	Integrated vertical handle
Colour of handle	-	Inox metallic	-
noFrost in fridge and freezer			
Home Connect	-	-	-
FOOD FRESHNESS SYSTEM			
hyperFresh	2 x hyperFresh drawers	2 x hyperFresh drawers	2 x hyperFresh drawers
KEY FEATURES – FRIDGE SECTION			
Light	LED	LED	LED
superCool function			
Type of control	Electronic	Electronic	Electronic
Number of shelves	5	5	5
Number of adjustable shelves	3	3	3
Number of door bins / shelves	4	3	3
Type of shelves	Safety glass	Safety glass	Safety glass
Temperature display	Digital LED	Digital LED	Digital LED
Warning signal door open			
Bottle shelves in fridge			
KEY FEATURES – FREEZER SECTION			
superFreeze function			
Temperature adjustable in freezer			
Number of ice cube trays	1	1	1
Bottle shelves in fridge	3	3	3
ADDITIONAL INFORMATION			
Energy efficiency class	A D	A A	↑ g B
Energy consumption <sup>1</sup> (kWh/annum)	223	104	129
Total net capacity (litres)	440	363	363
Freezer net capacity (litres)	129	103	103
Climate Class <sup>2</sup>	SN-T	SN-T	SN-T
Noise level (dB [A] re 1pW)	35	29	33
Noise level class	В	A	В
Additional accessories included	3 x egg trays 1 x ice cube tray 1 x bottle support	3 x egg trays 1 x ice cube tray 1 x bottle support 1 x bottle cooler	3 x egg trays 1 x ice cube tray 1 x bottle support 1 x bottle cooler
Height of product (mm)	2030	2030	2030
Width of product (mm)	700	600	600
Depth of product (mm)	667	665	

Yes, model has this feature. – Feature not available for this model.

 $^{1}$  Actual energy consumption will depend on how the appliance is used and where it is located.  $^{2}$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.



Freestanding fridge freezer noFrost specifications

noFrost specifications		
APPLIANCE TYPE	FREESTANDING FI	RIDGE FREEZERS
Design family	iQ 300	
Model number	KG39NXIBF	
DESIGN FEATURES		
Colour of door panels	Stainless steel	
Colour of sides	Pearl grey	
Style of handle	Integrated vertical handle	
Colour of handle	-	
noFrost in fridge and freezer		
Home Connect	-	
FOOD FRESHNESS SYSTEM		
hyperFresh	2 x hyperFresh drawers	
KEY FEATURES – FRIDGE SECTION		
Light	LED	
superCool function		
Type of control	Electronic	
Number of shelves	5	
Number of adjustable shelves	3	
Number of door bins / shelves	4	
Type of shelves	Safety glass	
Temperature display	Digital LED	
Warning signal door open		
Bottle shelves in fridge		
KEY FEATURES – FREEZER SECTION		
superFreeze function		
Temperature adjustable in freezer		
Number of ice cube trays	1	
Bottle shelves in fridge	3	
ADDITIONAL INFORMATION		
Energy efficiency class	₿ B	
Energy consumption <sup>1</sup> (kWh/annum)	129	
Total net capacity (litres)	363	
Freezer net capacity (litres)	103	
Climate Class <sup>2</sup>	SN-T	
Noise level (dB [A] re 1pW)	33	
Noise level class	В	
Additional accessories included	3 x egg trays	
	1 x ice cube tray 1 x bottle support	
	r x bottle support	
Height of product (mm)	2030	
Width of product (mm)	600	
Depth of product (mm)	665	

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located. <sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

#### Fridge freezers | Freestanding cooling



#### Discontinues June 2024

REEZERS NOFROST	

KG36NXXDF		
Blacktainless steel		
Cast iron		
Integrated vertical handle		
-		
-		
2 x hyperFresh drawers		

LED
Electronic
4
2
3
Safety glass
Digital LED
•
1
3
199
321
103
SN-T
103
В
3 x egg trays
1 x ice cube tray
1 x bottle support
1860


1860	
600	
665	

# Upright single door fridges

#### IQ 500 KS36VAXEP

Freestanding fridge **Black stainless steel** 







5 year warranty

Freestanding upright single door fridge specifications

luge specifications	
APPLIANCE TYPE	UPRIGHT SINGLE DOOR FRIDGE
Design family	iQ 500
Model number	K\$36VAXEP
DESIGN FEATURES	
Colour of door panels	Black stainless steel
Colour of side panels	Cast iron
Style of handle	Vertical bar handle
Colour of handle	Stainless steel
noFrost in fridge and freezer	(24)
Home Connect	
FOOD FRESHNESS SYSTEM	
hyperFresh	1 x hyperFresh drawer 1 x vegetable box
KEY FEATURES – FRIDGE SECTION	
Light	LED
superCool function	
Type of control	Electronic
Number of shelves	7
Number of adjustable shelves	4
Number of door bins / shelves	5
Type of shelves	Safety glass
Temperature display	Digital LED
Warning signal door open	
Bottle shelves in fridge	
KEY FEATURES – FREEZER SECTION	
superFreeze function	
Temperature adjustable in freezer	-
Number of ice cube trays	-
Number of freezer drawers	-
ADDITIONAL INFORMATION	
Energy efficiency class	ÊE
Energy consumption <sup>1</sup> (kWh/annum)	116
Total net capacity (litres)	346
Freezer net capacity (litres)	-
Climate Class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	39
Noise level class	c
Additional accessories included	3 x egg trays 1 x bottle support
Height of product (mm)	1860
Width of product (mm)	600
Depth of product (mm)	650

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C. Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

	-	LE1
	· .	
B		
		1 01

5 year warranty

Freestanding upright single door

idge specifications	
APPLIANCE TYPE	UPRIGHT SINGLE DOOR FRIDGE
Design family	iQ 300
Model number	KS36VVIEPG
DESIGN FEATURES	
Colour of door panels	Stainless steel
Colour of side panels	Pearl grey
Style of handle	Vertical bar handle
Colour of handle	Stainless steel
noFrost in fridge and freezer	-
Home Connect	-
FOOD FRESHNESS SYSTEM	
hyperFresh	1 x hyperFresh drawer
KEY FEATURES – FRIDGE SECTION	
Light	LED
superCool function	
Type of control	Electronic
Number of shelves	7
Number of adjustable shelves	5
Number of door bins / shelves	5
Type of shelves	Safety glass
Temperature display	Digital LED
Warning signal door open	-
Bottle shelves in fridge	
KEY FEATURES – FREEZER SECTION	
superFreeze function	-
Temperature adjustable in freezer	_
Number of ice cube trays	-
Number of freezer drawers	_
ADDITIONAL INFORMATION	
Energy efficiency class	Î D
Energy consumption <sup>1</sup> (kWh/annum)	116
Total net capacity (litres)	346
Freezer net capacity (litres)	-
Climate Class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	39
Noise level class	С
Additional accessories included	3 x egg trays 1 x bottle support
Height of product (mm)	1860
Width of product (mm)	600
Depth of product (mm)	650

Yes, i has this feature. – Feature not

<sup>1</sup>Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

# Upright single door freezers

#### iQ 500 GS36NAXEP

Freestanding freezer Black stainelss steel





_	APPLIANCE TYPE
	Design family
	Model number
	DESIGN FEATURES

fridge specifications

Freestanding upright single door

Model number	G\$36NAXEP
DESIGN FEATURES	
Colour of door panels	Black stainless steel
Colour of side panels	Cast iron
Style of handle	Vertical bar handle
Colour of handle	Stainless steel
noFrost in fridge and freezer	
Home Connect	
FOOD FRESHNESS SYSTEM	
hyperFresh	-
KEY FEATURES – FRIDGE SECTION	
Light	-
superCool function	121
Type of control	Electronic
Number of shelves	-
Number of adjustable shelves	(m)
Number of door bins / shelves	-
Type of shelves	-
Temperature display	Digital LED
Warning signal door open	
Bottle shelves in fridge	
KEY FEATURES – FREEZER SECTION	
superFreeze function	
Temperature adjustable in freezer	
Number of ice cube trays	Twist ice box
Number of freezer drawers	4
ADDITIONAL INFORMATION	
Energy efficiency class	ê E
Energy consumption <sup>1</sup> (kWh/annum)	234
Total net capacity (litres)	242
Freezer net capacity (litres)	242
Climate Class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	39
Noise level class	C
Additional accessories included	2 x ice blocks 1 x twist ice box
Height of product (mm)	1860
Width of product (mm)	600
Depth of product (mm)	650

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.
<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C.
Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.
Data valid in this table as of April 2024. Subject to modification without prior notice.
\*5 year warranty - Offer dates: 01.04.24 - 31.03.25. T&C's apply. Online registration required.



5 year warranty

SINGLE DOOR FREEZER



5 year warranty

Freestanding upright single door fridge specifications

nuge specifications	
APPLIANCE TYPE	UPRIGHT SINGLE DOOR FREEZER
Design family	iQ 300
Model number	G\$36NVIEV
DESIGN FEATURES	
Colour of door panels	Stainless steel
Colour of side panels	Pearl grey
Style of handle	Vertical bar handle
Colour of handle	Pearl grey
noFrost in fridge and freezer	
Home Connect	
FOOD FRESHNESS SYSTEM	
hyperFresh	
KEY FEATURES – FRIDGE SECTION	
Light	141 141
superCool function	( <u></u> )
Type of control	Electronic
Number of shelves	( <del></del> )
Number of adjustable shelves	
Number of door bins / shelves	
Type of shelves	
Temperature display	Digital LED
Warning signal door open	
Bottle shelves in fridge	
KEY FEATURES – FREEZER SECTION	
superFreeze function	
Temperature adjustable in freezer	
Number of ice cube trays	1
Number of freezer drawers	5
ADDITIONAL INFORMATION	
Energy efficiency class	Ê
Energy consumption <sup>1</sup> (kWh/annum)	234
Total net capacity (litres)	242
Freezer net capacity (litres)	242
Climate Class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	39
Noise level class	c
Additional accessories included	3 x ice cube tray
Height of product (mm)	1860
Width of product (mm)	600
Depth of product (mm)	650

Yes, model has this feature. – Feature not available for this model.


<sup>1</sup>Actual energy consumption will depend on how the appliance is used and where it is located. <sup>2</sup>Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.


Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

### Cooling technical diagrams


#### Multi Door / American Style fridge freezer KF96RSBEA

### 1815 . 906 🗧 610 (B) A: Front is adjustable from 1830 to 1847 mm, with front levelling feet fully extended B: Add 25 mm for fixed spacers on back







#### Multi Door / American Style fridge freezer KF96DPXEA

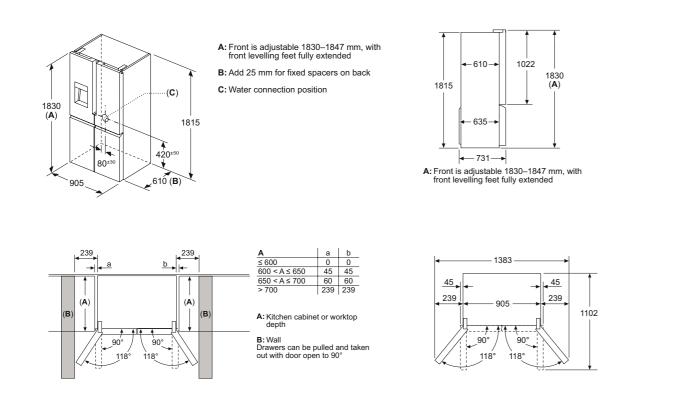


Multi Door / American Style fridge freezers KF96NAXEAG and KF96NVPEAG




A: Front is adjustable from 1830 to 1847, with front levelling feet fully extended
 B: Add 25 for fixed spacers on back




American Style fridge freezer KA93GAIDP







Measurements in mm. Line drawings are for reference only. Please download the latest installation guidelines from siemens-home.bsh-group.com/uk 228 Siemens cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.



A: Front is adjustable from 1830 to 1847, with front levelling feet fully extended







А	а	b
≤ 600	50	50
600 < A ≤ 650	50	50
650 < A ≤ 700	53	96
> 700	277	418

A: Kitchen cabinet or worktop depth

B: Wall

Drawers can be pulled out with door open to 90°

Drawers can be taken out with door completely opened

# Innovative features for sparkling results

Siemens built-in dishwashers feature modern design and innovative ideas for seamless living.

Siemens dishwashers are equipped with practical innovations such as varioSpeed Plus, which washes and dries your dishes three times faster than the average cycle, and Zeolith<sup>®</sup> drying technology that transforms humidity into heat for gentle and effective drying results.

With maximum flexibility from adjustable baskets and foldable racks, and stylish innovations such as sideLight and timeLight floor projection, they provide the perfect balance between modern design and innovative technology. The ideal solution for family dinners or hosting parties for friends, as they ensure dishes and glasses are left sparkling clean.



#### Siemens built-in dishwasher warranties:



5 year warranty

A five year warranty is available on all built-in dishwasher models listed in this brochure to protect against manufacturing and material faults during this warranty period.

Offer dates: 01.04.24 – 31.03.25. Online registration required. For full T&Cs and qualifying appliances visit siemens-home.bshgroup.com/uk/customer-service/siemens-warranties



10 Year Anti-Rust Warranty All Siemens dishwashers purchased from the 1st January 2012 onwards have a 10 Year Anti-Rust Warranty to protect against rust in the inner cavity of the appliance.



#### Lifetime AquaStop Warranty

All Siemens built-in dishwashers listed in this brochure have a lifetime AquaStop warranty to protect against water damage caused by a defective AquaStop system.

To find out more about warranty and for registration, please visit: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties



## Key dishcare features

All our dishwashers feature glass care technology, they regulate the degree of hardness in the water to help optimise the protection of glasses, as soft water can cause glass corrosion.

The priority zone for gentle and thorough washing of the most valuable glasses.



#### glassZone Thanks to the glassZone, even the most

valuable of glasses can go in the dishwasher with peace of mind. The six integrated nozzles ensure continuous but gentle water supply which enables thorough cleaning without damaging sensitive materials. In addition, integrated soft anti-slip elements give a secure hold, protect against mechanical stress and prevent damage to glass rims.



Create the perfect space in the dishwasher for any load.

ckMatic™

<u>,,,,</u>	- ra
77771 🔶	A
	fe
rackMatic	a
rackiviatic	n

vailable across all storage solutions, this eature conveniently allows the user to raise nd lower the height of the top basket to create ore or less space, even when the dishwasher is loaded.





#### Storage solutions for added flexibility and better results.



varioDrawer By adding a third shelf for cutlery, varioDrawer removes the need for a cutlery basket and creates more space.





#### flexComfort basket system

These baskets have the ability to fold down certain compartments within the cavity for extra room – the top rack has 2 areas that can be adjusted for extra flexibility whilst the bottom basket has 8 areas that can be adjusted to create more space so the inside of your dishwasher is constantly adaptable. Anti-slip elements and stemware support hold have also been added, meaning it has never been as easy to load your dishwasher.



#### flexComfort Pro basket system


The flexComfort Pro basket system is designed to hold larger plates and allows you to create extra space for pots and pans with ease. Choose from up to 6 flexible areas in the top rack and up to 8 flexible areas in the bottom basket to create extra space. Blue touchpoints inside the baskets indicate all the adjustment options available at a glance, and the easyGlide wheels on the upper basket make loading the dishwasher even easier. Other features such as anti-slip elements and stemware support hold means you can easily and securely load your glassware and get on with your day, chore free.



#### varioFlex basket system

The varioFlex basket has 2 flexible areas in the top rack and 4 in the bottom, providing extra flexibility within the dishwasher to create more space for larger items









#### Floor projection displays.



infoLight Projects a beam of light onto the floor to show the dishwasher is running. This prevents needing to open the door while the cycle is still active to see if it is finished.



#### timeLight

Useable on any colour surface, the innovative timeLight projects the remaining time and other essential dishwasher cycle information onto the floor, making it easy to check on the cycle status.

With quiet dishwashers, this solution shows the dishwasher is running and how long is left at a glance, to avoid having to open the door mid-cycle to check.






#### Added kitchen convenience.



9

Silence programme **autoOpen dry** Gentle drying thanks to autoOpen dry. During the drying process, the door opens automatically allowing dishes to naturally dry without the need for additional energy.



When the Silence programme is selected the dishwasher's noise level is reduced by 2-3dB. This is achieved by decreasing water pressure and extending run time.



Silence on Demand If silence is needed during the wash cycle, the dishwasher can be paused for up to 30 minutes by using Silence on Demand with Home Connect. This can be activated via the app or voice control.

#### Hygiene Plus

Hygiene Plus

Great for cleaning chopping boards, food containers and utensils. It heats up to extra high temperature in the final rinse for maximum hygiene, regardless of the chosen cycle.\* \*Not on delicate programme.

#### Light up the dishwasher.



#### emotionLight

Creating a relaxed ambiance, the emotionLight uses LED lights to reflect off brilliantly-cleaned glasses and create a cool blue glow emanating from inside the dishwasher when the door is open and switching off again when closed.



#### sideLight

With the sideLight, it is easy to immediately see whether the washing programme is still running. During operation, the blue light strip illuminates the furniture gap on the left hand side of the dishwasher. Only available on selected models.







### Our built-in dishwashers' lowest water usage programme is 7.7L per cycle\* if the Eco 50 pr

Water consumption

programme is 7.7L per cycle\* if the Eco 50 programme is selected, for the most resource efficient option. \*Based on SN95ZX61CG



#### Machine Care with Siemens dishwashers

For excellent results when washing and drying, looking after the dishwasher correctly is important. All of our integrated Siemens dishwashers include the Machine Care Programme.

This programme is designed to be used together with a dishwasher cleaning detergent and provides a short, high temperature, high pressure wash designed to remove limescale and grease build up inside the dishwasher and outlet pipes. The dishwasher will send a reminder every 30 cycles or so to run this programme, to keep the appliance running as efficiently as possible.

# Discover top of the range displays

#### Multiple choices for display type to suit every need.

Black touch control with TFT display and real-time clock The clear, high resolution touch controlled TFT display makes it easy to select programmes and settings and check the dishwasher status at a glance. Thanks to the real-time clock, it is now possible to set the exact time the dishes will be ready, for extra convenience. Perfect for delivering warm plates to the dinner table.



Model shown: SN87TX00CE fully integrated dishwasher

#### Black touch control with LED display

With the same top of the range sleek black touch control panel, it has a clear LED display screen which displays the programme setting and duration time.



#### Black / Stainless Steel touch control button and LED display

The two zone design is stylish and functional, with direct button selection and a white LED display, providing clear status information. When a programme and option is selected a blue LED illuminates under the button.

#### Black push button control with toggle and LED display

With black buttons, a toggle screen and an LED screen which displays programme settings and duration time, this easy to use interface is practical and stylish.



Model shown: SN61HX03KG fully integrated dishwasher

### varioHinge. The ideal solution for extra long cabinet doors.

varioHinge enables the furniture panel to slide up the appliance door as it opens, avoiding collision with the plinth.



+ 10 10 100 100 100

Siemens has four built-in 60cm dishwasher models - SN95YX02CG, SN95ZX61CG, SN73HX10VG, SX73HX10VG - plus a 45cm dishwasher SR93EX24MG - with varioHinge.

varioHinge ensures flexible dishwasher installation inline with the design of the kitchen. Perfect for cabinet doors in handle-less kitchens, or designs with low baseboards and longer cabinet panels as the varioHinge allows the cabinet door to be pushed upwards when opened to avoid the door catching. The varioHinge reduces the bottom gap between cabinet doors too for a seamless finish to the kitchen. These appliances are suitable for use with a 50mm plinth.



 $\mathbf{\nabla}$ varioHinge.

# and seamlessly fitted varioHinge options



Model shown: SN95ZX61CG fully integrated dishwasher



Model shown: SX73HX10VG fully integrated extra height 86.5cm dishwasher



Attractive design for high installation thanks to minimal gap size made possible by

With varioHinge, a lower plinth height is possible.



#### Live in the moment with the help of a smart dishwasher.

There are more important things in life than worrying about washing dishes and replenishing dishwasher tabs. Siemens smart dishwashers provide more efficient results, additional programmes and enhanced control.

There are a number of great features to choose from in the Home Connect app, such as Speed on Demand and Silence on Demand. The app allows the selection of favourite programmes and option combinations to provide the flexibility to alter wash cycle options from anywhere at anytime.

#### Perfectly tailored dishcare

The Intelligent Programme adapts the dish washing process to individual needs. After the programme is finished, the results and duration can be rated via the Home Connect app. From this, the dishwasher will automatically adapt the settings and offer several alternatives, such as more energy efficient options. It also has the option to monitor water and energy consumption.

#### Never run out of dishwasher tabs again


By linking a smart dishwasher with the Smart Finish autoreplenishment service, there will never be a situation where there is no dishwasher tablets again. The Smart Finish service keeps track of tablet stock and will automatically reorder more when it is running low.

#### Always use the perfect programme

By using the Home Connect app to start a programme, it will be easy to see a detailed description of each programme, as well as energy and water usage indicators. The choice is either pick the best programme for the specific load or let our Programme Assistant help pick the recommended option based on the requirements.

#### Programme Download

Paired with the Home Connect app Siemens' dishwashers can always be kept up to date with software updates. They can even be personalised by downloading free additional programmes available via the Home Connect app. Whether it is more intense programmes, intelligent programmes or even faster programmes, there are additional programmes - up to 10 depending on the model - available to suit everyone's need. Once downloaded they can also be added to favourites for even quicker access.

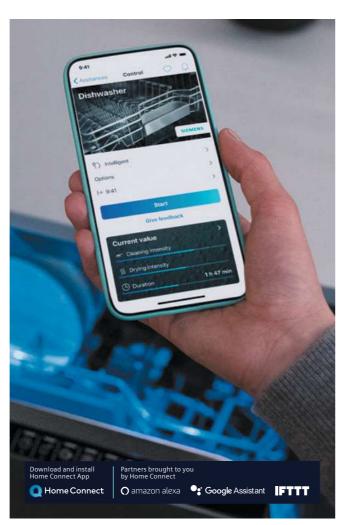

Learn more about Home Connect by visiting Siemens Home UK: www.siemens-home.bsh-group.com/uk

Or scan the QR code to learn more about our smart dishwasher appliances.







#### Features available on all built-in dishwasher models.



#### varioSpeed Plus


Use the varioSpeed Plus button to run the dishwasher significantly faster without compromising on wash quality.



#### Speed on demand An advanced functionality of varioSpeed Plus that cleans and dries the dishes in the shortest possible time for individual needs. This option can be selected, even if the programme is running, via the Home Connect App.

#### dosageAssist D

Quickly and evenly dissolves dishwasher tablets throughout the entire machine, leaving no mess to clean at the end of the cycle. This also prevents the tablet getting stuck in the dishware to ensure no cleaning product residue is left after the cycle.



dosageAssist


extraDry

The extraDry option can be added to any programme and will extend the drying cycle. This can be useful for harder to dry loads.



#### intensiveZone Delicate items can be cleaned together in the same wash as pots and pans. The intensiveZone increases the spray pressure and temperature in the bottom basket to handle burnt on pans, whilst more delicate

items can be washed safely in the top basket.



Ensures that the optimum temperature is used depending on how dirty the dishes are, so that they are left perfectly clean all year round.

#### Heat exchanger

Protects glasses from cracking by using gentle water heating. Heat generated during the wash cycle is used to pre-heat the rinsing water to stop glasses being put under stress.



#### Standard features | Built-in dishwashers



#### loadSensor

The loadSensor feature helps to ensure that dishes are cleaned thoroughly by ensuring that the optimum amount of water is flowing through the dishes during the cycle.



#### Favourites

The Favourite button makes using the dishwasher even more personal. Simply enter the most used combination of programmes and options, and then start them conveniently at the touch of a button, via the Home Connect app or via a smart watch.

#### A modern handleless kitchen.



#### openAssist

With door openAssist, fully integrated dishwashers can be opened by touching the front of the unit to make loading and unloading easy. This removes the need for a handle and is the ideal choice for designer kitchens. With this feature, it is also possible to implement a child lock so that the appliance requires two gentle touches before opening.



### Dishwasher product overview

#### Fully integrated dishwasher range

Display type	60cm dishwasher	60cm dishwasher	60cm dishwasher	60cm dishwasher
	81.5cm width	81.5cm width	81.5cm width	86.5cm width
	varioHinge	varioHinge	varioHinge	varioHinge
Touch control + TFT				
Touch control + LED	SN95YX02CG Elson Black • 14 place settings • 9.5 litres • varioDrawer • Zeolith • autoOpen dry • flexComfort • sideLight (Blue) • door openAssist • glassZone	SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95ZX61CG SN95Z		
Push buttons + LED			E SN73HX10VG O Black / Stainless Steel • 14 place settings • 9 litres • varioDrawer • varioFlex • infoLight (Blue) • Polinox	E SX73HX10VG O EQ300 Black / Stainless Steel • 14 place settings • 9 litres • varioDrawer • varioFlex • infoLight (Blue) • Polinox
Toggle control + LED				

() Home Connect 45cm dishwasher 60cm dishwasher 60cm dishwasher 81.5cm width 81.5cm width 81.5cm width Fixed hin Fixed hinge -Q SN87TX00CE **IO** 700 Black Black
 14 place settings
 9.5 litres
 varioDrawer
 Zeolith
 autoOpen dry
 flexComfort Pro
 timed instr (White) • timeLight (White) door openAssist glassZone THE PART Syear в Q SN85EX07CG iQ 500 Black 14 place settings 9 litres varioDrawer
autoOpen dry
flexComfort • timeLight (White) door openAssist
glassZone 1.1 **.** SR93EX24MG 🔍 Black / Stainless Steel 10 place settings 8.9 litres varioDrawer varioFlex infoLight (Blue)autoOpen dry door openAssist


60cm dishwasher	60cm dishwasher	60cm dishwasher	
81.5cm width	81.5cm width	81.5cm width	
81.5cm width Fixed hinge	81.5cm width Fixed hinge	81.5cm width Fixed hinge	
SN61HX03KG C Elack • 13 place settings • varioFlex • infoLight (blue)	SNG1HX02TG C Black (available July 2024) • 13 place settings • 9 litres • vario • infoLight (blue) • Polinox	SN611X12TG C SN611X12TG C TO100 Black (disc Dec 2024) 12 place settings 10.5 litres Vario infoLight (blue) Polinox	

### 60cm dishwashers

#### Q 700 SN87TX00CE

60cm fully integrated dishwasher





#### flexComfort Pro basket system

flexComfort Pro baskets create extra room for pots and pans. With an optimised lower basket design for large plates and adjustable sides highlighted with blue touchpoints, the dishwasher can adapt to any load quickly and easily.

#### varioDrawer included

Selected models include a varioDrawer, providing a third loading level for cutlery and removing the need for a cutlery basket. This creates more room for large pots and pans below and includes space for small items such as ladles and espresso cups.

60cm fully integrated dishwasher specifications	
APPLIANCE TYPE	60CM FULLY INTEGRATED DISHWASHER
Design family	iQ 700
Model number	SN87TX00CE
Control panel colour	Black
Height (cm) / Hinge type	81.5 / Fixed
DESIGN FEATURES	
Drying system	Zeolith / autoOpen dry
Home Connect Wi-Fi connectivity	
Control panel type	Touch control + TFT
Basket description	flexComfort Pro
varioDrawer (3rd loading level)	varioDrawer
Status indicator	timeLight (White)
Door openAssist	
glassZone	
Glass care technology	
Anti-slip protection / stemware support upper basket	
Adjustable upper basket	rackMatic <sup>™</sup> 3-stage
Number of flip tines in upper / lower basket	6/8
Cup shelves upper / lower baskets	2/2
Cutlery holder lower basket	-
Largest loadable dish upper / lower basket (cm)	21/30
aquaSensor	
Real-time clock	
Start delay time max hours	24
Emotion light (interior lighting)	
End of cycle indicator	Acoustic
Salt / Rinse aid light indicator	
Self cleaning filter system	
Flood protection system	AquaStop 24h
Safety features	Door lock
PROGRAMMES / FUNCTIONS List of programmes	Intelligent 40°C, Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 60°C, brilliantShine 40° Silence 50°C, Favourite, Machine Care
Additional operational options	Remote Start, Shine & Dry, intensiveZone, Hygiene Plus, varioSpeed Plus
TECHNICAL INFORMATION	
Reference programme for measurements	Eco 50°C
Energy efficiency class <sup>1</sup>	
Energy² / water³ (kWh / litres)	54/9.5
Load capacity (place settings)	14
Programme duration <sup>4</sup> (h:min)	4:55
Noise level (dB [A] re 1pW)	43
Noise efficiency class	В
Noise level (silence programme) (dB [A] re 1pW)	41
Length of electrical supply cord (cm)	175
Length inlet / outlet hose (cm)	165 / 190
Maximum height for installation (mm)	875
Maximum height adjustability feet (mm)	60
Maximum width for installation (mm)	600
Height of the product (mm)	815
Width / Depth of the product (mm)	598 / 550
Net weight / Gross weight (kg)	43/45
Water softener <sup>5</sup>	
Maximum accepted water hardness (°DH)	50
Maximum temperature for water intake (°C)	60
Interior cavity	Stainless steel

Included accessories Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> On an energy-efficiency class scale from A to G.

<sup>1</sup> On an energy-enclency class scale from A to G.
<sup>2</sup> Energy consumption in klwh100 operating cycles (using Eco programme).
<sup>3</sup> Water consumption in litres/operating cycle (using Eco programme).
<sup>4</sup> Duration of Eco programme.
<sup>5</sup> We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener in the softener produces softened water of less than 1.1 mmollitre (7.0'e) and the water softener in the soften the appliance is turned off. Please contact product advice for further information. Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to ¾ screwed joint

Steam protection plate

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.



5 year warranty

Home Connect



	\$ vear wetranty	* 5 year warranty		* 5 year warranty
	↓ varioHinge	↓ varioHinge	* 5 Year warranty	↓ varioHinge
	O Home Connect	Home Connect	O Home Connect	O Home Connect
60cm fully integrated dishwasher specifications				
APPLIANCE TYPE	iQ 500		IQ 500	iQ 300
Design family Model number	5N95YX02CG	IQ 500 \$N95ZX61CG	5N85EX07CG	SX73HX10VG
Control panel colour	Black	Black	Black	Black / Stainless Steel
Height (cm) / Hinge type	81.5 / varioHinge	81.5 / varioHinge	81.5 / Fixed	86.5 / varioHinge
DESIGN FEATURES				
Drying system	Zeolith / autoOpen dry	Zeolith	autoOpen dry / Heat exchanger	Heat exchanger
Home Connect Wi-Fi connectivity Control panel type	Touch control + LED	Touch control + LED	Touch control + LED	Push buttons + LED
Basket description	flexComfort	flexComfort	flexComfort	varioFlex
varioDrawer (3rd loading level)	varioDrawer	varioDrawer	varioDrawer	varioDrawer
itatus indicator	sideLight (Blue)	sideLight (Blue)	timeLight (White)	infoLight (Blue)
Door openAssist				-
lassZone	•			-
lass care technology				
Inti-slip protection / stemware support upper basket	rackMatic™ 3-stage	■ / ■ rackMatic™ 3-stage	■ / ■ rackMatic™ 3-stage	- / - rackMatic™ 3-stage
Number of flip tines in upper / lower basket	2/8	2/8	2/8	2/4
Cup shelves upper / lower baskets	2/2	2/2	2/2	2/-
Cutlery holder lower basket	-	-	-	-
Largest loadable dish upper / lower basket (cm)	21/30	21/30	21/30	21/30
aquaSensor	•			
Real-time clock	- 24	-	-	-
Start delay time max hours Emotion light (interior lighting)	24	24	24	24
End of cycle indicator	Acoustic	Acoustic	Acoustic	Acoustic
Salt / Rinse aid light indicator	■ / ■	■/■	■/■	■/■
Self cleaning filter system				
Flood protection system	AquaStop 24h	AquaStop 24h	AquaStop 24h	AquaStop 24h
	Door lock	Door lock	Door lock	Door lock
PROGRAMMES / FUNCTIONS		For FORE A state of the state in TORE		
PROGRAMMES / FUNCTIONS	Intelligent 40°C, Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 60°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care	Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care	Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care	Speed 65°C, Speed 45°C, Favourit Machine Care
PROGRAMMES / FUNCTIONS ist of programmes Additional operational options	Intensive 70°C, Speed 60°C, brilliantShine 40°C, Silence 50°C,	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C,	Speed 65°C, Speed 45°C, Glass 40°C,	Speed 65°C, Speed 45°C, Favourit
PROGRAMMES / FUNCTIONS List of programmes Additional operational options FECHNICAL INFORMATION	Intensive 70°C, Speed 60°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus
PROGRAMMES / FUNCTIONS List of programmes Additional operational options FECHNICAL INFORMATION Reference programme for measurements	Intensive 70°C, Speed 60°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C
ROGRAMMES / FUNCTIONS ist of programmes Additional operational options FECHNICAL INFORMATION Reference programme for measurements inergy efficiency class <sup>1</sup>	Intensive 70°C, Speed 60°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C
PROGRAMMES / FUNCTIONS ist of programmes Additional operational options FECHNICAL INFORMATION Reference programme for measurements inergy efficiency class <sup>1</sup> inergy <sup>2</sup> / water <sup>3</sup> (kWh / litres)	Intensive 70°C, Speed 60°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C Eco 50°C S4 / 9.5	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C
PROGRAMMES / FUNCTIONS List of programmes Additional operational options EECHNICAL INFORMATION Reference programme for measurements Energy efficiency class <sup>1</sup> Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres) Load capacity (place settings)	Intensive 70°C, Speed 60°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C Eco 50°C S4 / 9.5 14	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C Eco 50°C 84 / 9 14
ROGRAMMES / FUNCTIONS ist of programmes Additional operational options ECHNICAL INFORMATION Reference programme for measurements inergy efficiency class <sup>1</sup> :inergy <sup>2</sup> / water <sup>3</sup> (kWh / litres) ood capacity (place settings) trogramme duration <sup>4</sup> (h:min)	Intensive 70°C, Speed 60°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C Eco 50°C S4 / 9.5	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C
PROGRAMMES / FUNCTIONS List of programmes Additional operational options FECHNICAL INFORMATION Reference programme for measurements Energy efficiency class <sup>1</sup> Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres) .oad capacity (place settings) Programme duration <sup>4</sup> (h.min) Noise level (dB [A] re 1pW)	Intensive 70°C, Speed 60°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C Eco 50°C S4 / 9.5 14 4:55	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C Eco 50°C A 17.7 13 3:45	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C Eco 50°C Eco 50°C Eco 50°C Eco 50°C Eco 50°C	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C E D 84 / 9 14 3:45
Additional operational options Additional operational options FECHNICAL INFORMATION Reference programme for measurements Energy? / water <sup>3</sup> (kWh / litres) Load capacity (place settings) Forogramme duration <sup>4</sup> (h:min) Noise level (dB [A] re 1pW) Noise level (silence programme) (dB [A] re 1pW)	Intensive 70°C, Speed 60°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C Eco 50°C Eco 50°C 54 / 9.5 14 4.55 44 8 43	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C A 17.7 74 17.7 13 3:45 44 8 42	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 65 / 9 14 3:35 42 8 41	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C E B 84 / 9 14 3:45 46 B -
PROGRAMMES / FUNCTIONS ist of programmes  Additional operational options  FECHNICAL INFORMATION  Reference programme for measurements Energy efficiency class  inergy <sup>2</sup> / water <sup>3</sup> (kWh / litres)	Intensive 70°C, Speed 60°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C Eco 50°C Ec	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C () () () () () () () () () () () () ()	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 65 / 9 14 3:35 42 8 41 175	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C E B 84 / 9 14 3:45 46 8 - 175
PROGRAMMES / FUNCTIONS List of programmes Additional operational options FECHNICAL INFORMATION Reference programme for measurements Energy efficiency class <sup>1</sup> Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres)oad capacity (place settings) Programme duration <sup>4</sup> (h.min) Noise level (dB [A] re 1pW) Noise level (silence programme) (dB [A] re 1pW) Losies level (silence programme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length of electrical supply	Intensive 70°C, Speed 60°C,           brilliantShine 40°C, Silence 50°C,           Favourite, Machine Care           Remote Start, Shine & Dry,           intensiveZone, varioSpeed Plus           Eco 50°C           Eco 50°C           Eco 50°C           14           4:55           44           8           43           175           165 / 190	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C (a) C 74 /7.7 13 3:45 44 8 42 175 165 / 190	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 65/9 14 3:35 42 8 41 175 165/190	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C (2000) 84 / 9 14 3:45 46 8 - 175 165 / 190
PROGRAMMES / FUNCTIONS List of programmes Additional operational options FECHNICAL INFORMATION Reference programme for measurements Energy efficiency class <sup>1</sup> Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres) Load capacity (place settings) Programme duration <sup>4</sup> (h:min) Voise level (dB [A] re 1pW) Noise efficiency class Voise level (silence programme) (dB [A] re 1pW) Length nelt / outlet hose (cm) Maximum height for installation (mm)	Intensive 70°C, Speed 60°C,           brilliantShine 40°C, Silence 50°C,           Favourite, Machine Care           Remote Start, Shine & Dry,           intensiveZone, varioSpeed Plus           Eco 50°C           E           54 / 9.5           14           4:55           44           8           43           175           165 / 190           875	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C A G 74 17.7 13 3:45 44 8 42 175 165 / 190 875	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C () () () () () () () () () () () () ()	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C E D 84/9 14 3/45 46 8 - 175 165/190 925
Additional operational options Additional operational options FECHNICAL INFORMATION Reference programme for measurements Energy efficiency class <sup>1</sup> Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres) .oad capacity (place settings) Programme duration <sup>4</sup> (h:min) Noise level (dB [A] re 1pW) Voise efficiency class Noise level (silence programme) (dB [A] re 1pW) .ength inlet / outlet hose (cm) Maximum height for installation (mm) Maximum height for installation (mm)	Intensive 70°C, Speed 60°C,           brilliantShine 40°C, Silence 50°C,           Favourite, Machine Care           Remote Start, Shine & Dry,           intensiveZone, varioSpeed Plus           Eco 50°C           Eco 50°C           Eco 50°C           14           4:55           44           8           43           175           165 / 190	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C (a) C 74 /7.7 13 3:45 44 8 42 175 165 / 190	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 65/9 14 3:35 42 8 41 175 165/190	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C (2000) 84 / 9 14 3:45 46 8 - 175 165 / 190
PROGRAMMES / FUNCTIONS List of programmes Additional operational options TECHNICAL INFORMATION Reference programme for measurements Energy of ficiency class <sup>1</sup> Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres) Load capacity (place settings) Programme duration <sup>4</sup> (h.min) Noise level (dB [A] re 1pW) Noise level (dB [A] re 1pW) Noise level (slience programme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length inlet / outlet hose (cm) Maximum height dor installation (mm) Maximum width for installation (mm)	Intensive 70°C, Speed 60°C,           brilliantShine 40°C, Silence 50°C,           Favourite, Machine Care           Remote Start, Shine & Dry,           intensiveZone, varioSpeed Plus           Eco 50°C           Eco 50°C           Ea           54 / 9.5           14           4:55           44           8           43           175           165 / 190           875           60	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C A 17.7 13 3:45 44 8 42 175 165 / 190 875 60	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 65 / 9 14 3:35 42 8 41 175 165 / 190 875 60	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 84/9 14 3:45 46 8 - 175 165/190 925 60
Safety features PROGRAMMES / FUNCTIONS List of programmes Additional operational options TECHNICAL INFORMATION Reference programme for measurements Energy efficiency class <sup>1</sup> Energy <sup>2</sup> / wate <sup>2</sup> (kWh / litres) Load capacity (place settings) Programme duration <sup>4</sup> (h.min) Noise level (dB [A] re 1pW) Noise efficiency class Noise level (silence programme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length intel / outlet hose (cm) Maximum height adjustability feet (mm) Maximum width for installation (mm) Height of the product (mm) Width / Depth of the product (mm)	Intensive 70°C, Speed 60°C,           brilliantShine 40°C, Silence 50°C,           Favourite, Machine Care           Remote Start, Shine & Dry,           intensiveZone, varioSpeed Plus           Eco 50°C           E           54 / 9.5           14           4:55           44           8           175           165 / 190           875           60           600           815           598 / 550	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 65 / 9 14 3:35 42 8 41 175 165 / 190 875 60 60 600 815 598 / 550	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 84/9 14 3.45 46 8 - 175 165 / 190 925 60 60 600 865 598 / 550
PROGRAMMES / FUNCTIONS List of programmes Additional operational options <b>TECHNICAL INFORMATION</b> Reference programme for measurements Energy efficiency class <sup>1</sup> Energy <sup>2</sup> / water <sup>3</sup> (kWh / lires) Load capacity (place settings) Programme duration <sup>4</sup> (h:min) Noise level (dB [A] re 1pW) Noise efficiency class gramme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length of electrical supply cord (cm) Maximum height for installation (mm) Maximum width for installation (mm) Maximum width for installation (mm) Height of the product (mm) Net weight ( Gross weight (kg)	Intensive 70°C, Speed 60°C,           brilliantShine 40°C, Silence 50°C,           Favourite, Machine Care           Remote Start, Shine & Dry,           intensiveZone, varioSpeed Plus           Eco 50°C           Eco 50°C           Ea           S4 / 9.5           14           4:55           44           B           43           175           165 / 190           875           60           600           815           598 / 550           47 / 49	Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus Eco 50°C A 17.7 13 3:45 44 8 42 175 165 / 190 875 60 60 600 815 598 / 550 44 / 46	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 65 / 9 14 3:35 42 8 41 175 165 / 190 875 60 60 600 815 598 / 550 39 / 41	Speed 65°C, Speed 45°C, Favourit Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 84/9 14 3:45 46 8 - 175 165/190 925 60 60 60 865 598/550 35/39
PROGRAMMES / FUNCTIONS List of programmes Additional operational options FECHNICAL INFORMATION Reference programme for measurements Energy 2 / water <sup>3</sup> (kWh / litres) .oad capacity (place settings) rogramme duration* (h.min) Noise level (dB [A] re 1pW) Noise level (dB [A] re 1pW) Noise level (silence programme) (dB [A] re 1pW) .ength of electrical supply cord (cm) .ength inlet / outlet hose (cm) Maximum height for installation (mm) Maximum height for installation (mm) Maximum width for installation (mm) Maximum Neight for installation (mm) Maximum height of restallation (mm) Maximum height for installation (mm) Maximum Neight for installation (mm) Ma	Intensive 70°C, Speed 60°C,           brilliantShine 40°C, Silence 50°C,           Favourite, Machine Care           Remote Start, Shine & Dry,           intensiveZone, varioSpeed Plus           Eco 50°C           60           60           600           815           598 / 550           47 / 49	Speed 60°C, Speed 45°C,         brilliantShine 40°C, Silence 50°C,         Favourite, Machine Care         Remote Start, Shine & Dry,         intensiveZone, varioSpeed Plus         Eco 50°C	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 65 / 9 14 3:35 42 8 41 175 165 / 190 875 60 60 600 815 598 / 550 39 / 41	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C E 84 / 9 14 3:45 46 8 - 175 165 / 190 925 60 60 60 865 598 / 550 35 / 39
PROGRAMMES / FUNCTIONS List of programmes Additional operational options FECHNICAL INFORMATION Reference programme for measurements Energy efficiency class <sup>1</sup> Energy <sup>2</sup> / wate <sup>3</sup> (kWh / litres) .coad capacity (place settings) Programme duration <sup>4</sup> (h.min) Noise level (dB [A] re 1pW) Noise level (dB [A] re 1pW) Noise level (silence programme) (dB [A] re 1pW) .ength of electrical supply cord (cm) .ength inlet / outlet hose (cm) Maximum height for installation (mm) Maximum height of the product (mm) Width / Depth of the product (mm) Nidth / Depth of the product (mm) Nidth / Depth of the product (mm) Mater softener <sup>4</sup> Maximum accepted water hardness ("DH)	Intensive 70°C, Speed 60°C,           brilliantShine 40°C, Silence 50°C,           Favourite, Machine Care           Remote Start, Shine & Dry,           intensiveZone, varioSpeed Plus           Eco 50°C           Eco 50°C           S4 / 9.5           14           4:55           44           8           43           175           165 / 190           875           60           600           815           598 / 550           47 / 49           ■           50	Speed 60°C, Speed 45°C,           brilliantShine 40°C, Silence 50°C,           Favourite, Machine Care           Remote Start, Shine & Dry,           intensiveZone, varioSpeed Plus           Eco 50°C           A           C           74 /7.7           13           3:45           44           8           42           175           165 / 190           875           60           600           815           598 / 550           44 / 46	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C (a) (b) (c) (c) (c) (c) (c) (c) (c) (c) (c) (c	Speed 65°C, Speed 45°C, Favouri Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 84 / 9 14 3:45 46 8 - 175 165 / 190 925 60 60 600 865 598 / 550 35 / 39 50
PROGRAMMES / FUNCTIONS ist of programmes Additional operational options FECHNICAL INFORMATION Reference programme for measurements Energy efficiency class <sup>1</sup> Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres) .oad capacity (place settings) rogramme duration <sup>4</sup> (h.min) Noise level (dB [A] re 1pW) Noise level (dB [A] re 1pW) Soise level (slience programme) (dB [A] re 1pW) ength of electrical supply cord (cm) ength inlet / outlet hose (cm) Maximum height for installation (mm) Maximum height for installation (mm) Maximum width for installation (mm) Height of the product (mm) Width / Depth of the product (mm) Width / Depth of the product (mm) Water softener <sup>8</sup>	Intensive 70°C, Speed 60°C,           brilliantShine 40°C, Silence 50°C,           Favourite, Machine Care           Remote Start, Shine & Dry,           intensiveZone, varioSpeed Plus           Eco 50°C           60           60           600           815           598 / 550           47 / 49	Speed 60°C, Speed 45°C,         brilliantShine 40°C, Silence 50°C,         Favourite, Machine Care         Remote Start, Shine & Dry,         intensiveZone, varioSpeed Plus         Eco 50°C	Speed 65°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 65 / 9 14 3:35 42 8 41 175 165 / 190 875 60 60 600 815 598 / 550 39 / 41	Speed 65°C, Speed 45°C, Favourit Machine Care Remote Start, intensiveZone, Half Load, varioSpeed Plus Eco 50°C 84 / 9 14 3:45 46 8 8 - 175 165 / 190 925 60 60 600 865 598 / 550 35 / 39

On an energy-efficiency class scale from A to G.
 Energy consumption in kWh/100 operating cycles (using Eco programme).
 Water consumption in litres/operating cycle (using Eco programme).


<sup>2</sup> Water consumption in intersoperating cycle (using codprogramme). <sup>4</sup> Duration of Eco programme. <sup>5</sup> We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmollitre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information. Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to ¾" screwed joint.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. 242

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

#### 60cm dishwashers | Built-in dishwashers

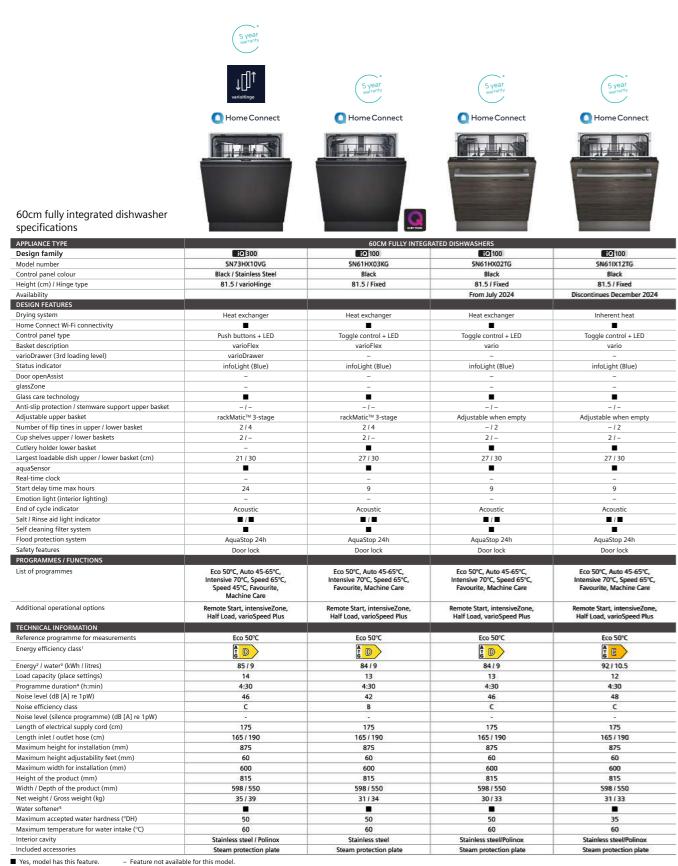

<sup>1</sup> On an energy-efficiency class scale from A to G. <sup>2</sup> Energy consumption in kWh/100 operating cycles (using Eco programme)

<sup>3</sup> Water consumption in litres/operating cycle (using Eco programme).

<sup>4</sup> Duration of Eco programme.

<sup>5</sup> We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmo/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice

for further information

Water pressure required: 0.5-10 Bar, Flow rate: 10 litres per minute. Inlet valve connected directly to 3/4" screwed joint.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required 45cm slimline dishwasher

#### Q 300 SR93EX24MG

45cm slimline fully integrated dishwasher





#### Slimline

Slimline dishwashers are perfect for kitchens with limited space. Despite the reduced size, they still benefit from exciting features such as door openAssist and speed programmes.

Our 45cm dishwasher has a two tone design with features including varioHinge, Home Connect, Speed on demand (via Home Connect app) and the Favourite programme (can set programme and option choice as favourite via the Home Connect app).

#### Speed on demand

The programme be sped up at any time during the wash cycle, even if the programme has started unlike, varioSpeed+ (this would need to be selected before the start of the programme). Speed on Demand can be activated using the Home Connect app.

#### 45cm slimline dishwasher | Built-in dishwashers



Home Connect



#### 45cm slimline fully integrated dishwasher specifications

APPLIANCE TYPE	45CM FULLY INTEGRATED DISHWASHER		
Design family	45CM FOLLY INTEGRATED DISHWASHER		
Model number	SR93EX24MG		
Control panel colour	Black / Stainless Steel		
Height (cm) / Hinge type	81.5 / varioHinge		
DESIGN FEATURES	81.57 variohinge		
	Heat exchanger / autoOpen day		
Drying system Home Connect Wi-Fi connectivity	Heat exchanger / autoOpen dry		
Control panel type	Push buttons + LED		
Basket description	varioFlex		
varioDrawer (3rd loading level)	varioDrawer		
Status indicator	infoLight (Blue)		
Door openAssist			
glassZone	-		
Glass care technology			
Anti-slip protection / stemware support upper basket			
Adjustable upper basket	rackMatic™ 3-stage		
Number of flip tines in upper / lower basket	2/2		
Cup shelves upper / lower baskets	1/1		
Cutlery holder lower basket	-		
Largest loadable dish upper <sup>6</sup> / lower basket (cm)	21 / 30		
aquaSensor			
Real-time clock	-		
Start delay time max hours	24		
Emotion light (interior lighting)	-		
End of cycle indicator	Acoustic		
Salt / Rinse aid light indicator			
Self cleaning filter system			
Flood protection system	AquaStop 24h		
Safety features	Door lock		
PROGRAMMES / FUNCTIONS			
List of programmes	Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 65°C, Speed 45°C, Favourite Machine Care		
Additional operational options	Remote Start, intensiveZone, Hygiene Plus, varioSpeed Plus		
TECHNICAL INFORMATION			
Reference programme for measurements	Eco 50 °C		
Energy efficiency class <sup>1</sup>	₿ <mark>℃</mark>		
Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres)	59 / 8.9		
Load capacity (place settings)	10		
Programme duration <sup>₄</sup> (h:min)	3:15		
Noise level (dB [A] re 1pW)	44		
Noise efficiency class	В		
Noise level (silence programme) (dB [A] re 1pW)	· · ·		
Length of electrical supply cord (cm)	175		
Length inlet / outlet hose (cm)	165 / 205		
Maximum height for installation (mm)	875		
Maximum height adjustability feet (mm)	60		
Maximum width for installation (mm)	450		
Height of the product (mm)	815		
Width / Depth of the product (mm)	448 / 550		
Net weight / Gross weight (kg)	32 / 34		
Water softener <sup>5</sup>			
Maximum accepted water hardness (°DH)	50		
Maximum temperature for water intake (°C)	60		
Interior cavity	Stainless steel		
Included accessories	Steam protection plate		

Yes, model has this feature. - Feature not available for this model

<sup>1</sup> On an energy-efficiency class scale from A to G.

<sup>2</sup> Energy consumption in kWh/100 operating cycles (using Eco programme).
<sup>3</sup> Water consumption in litres/operating cycle (using Eco programme).

<sup>4</sup> Duration of Eco programme.

<sup>5</sup> We would recommend our disbwashers are connected to the mains water supply where possible. However the main reconstruction of a summary and end of the water softened water of less than 1.1 mmo/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information. Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to 3/4" screwed joint


<sup>6</sup> Largest loadable dish height in upper basket will be smaller when varioDrawer is installed.


Data valid in this table as of April 2024. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.24 - 31.03.25. T&C's apply. Online registration required

### Dishwasher technical diagrams


#### Fully integrated dishwashers SN95YX02CG, SN95ZX61CG, SN73HX10VG







 $\stackrel{\star}{\to}$  socket ( ) values with extension kit

#### 45cm fully integrated dishwasher SR93EX24MG




#### Fully integrated dishwashers SN87TX00CE, SN85EX07CG, SN61HX03KG, SN61HX02TG and SN61IX12TG






A socket () values with extension kit


#### Fully integrated dishwasher SX73HX10VG





#### Fully integrated dishwasher accessories

		SN87TX00CE	SN95YX02CG	SN95ZX61CG	SN85EX07CG	SX73HX10VG	SN73HX10VG	SN61HX03KG	SN61HX02TG	SN61IX12TG	SR93EX24MG
Aqua stop extension	SZ72010					•					
Silver polishing cassette	SZ73001										
Split door furniture front connection rails – For fullsize and slimline models	SZ38BI00										
Decor strip - For full size Polinox base models, 81.5cm height	SZ30BI02										
Decor strip - For full size and slimline Stainless Steel base models, 81.5cm height	SZ30BI01										
Decor strip - For full size Stainless Steel base models, 86.5cm height	SZ30BI11										
Decor strip - For full size Stainless Steel base models installed off the ground, 81.5cm height	SZ73035										
Decor strip - For full size Stainless Steel base models installed off the ground, 86.5cm height	SZ73045										
Door attachment – brushed steel	SZ73056										
Drop hinge for tall cabinets	SZ73010										
Adjustable cutlery basket - full size dishwashers	SZ73100			•		•					
Adjustable cutlery basket - slimline dishwashers	SZ73145										-
Wine glass holder accessory (Glass secure tray)	SZ73300					•					
Rack insert for stemware dishwasher	SZ73640			•		•			•		



A socket () values with extension kit

# Cutting-edge innovations for extra shine

Siemens freestanding dishwashers take full advantage of the latest technologies.

Designed to fit in around busy lifestyles, our standard 60cm freestanding dishwashers feature efficient, time saving and environmentally conscious programmes, sure to make dishes shine. With a sleek and stylish design, both inside and out, Siemens dishwashers are designed to complement the home.



Siemens freestanding dishwasher warranties:



5 year warranty

A five year warranty is available on all freestanding dishwasher models listed in this brochure to protect against manufacturing and material faults during this warranty period.

Offer dates: 01.04.24 – 31.03.25. Online registration required. For full T&Cs and qualifying appliances visit **siemens-home.bsh-group.com/uk/customer-service/siemens-warranties** 



10 Year Anti-Rust Warranty All Siemens dishwashers purchased from the 1st January 2012 onwards have a 10 Year Anti-Rust Warranty to protect against rust in the inner cavity of the appliance.



#### Lifetime AquaStop Warranty

All Siemens freestanding dishwashers listed in this brochure have a lifetime AquaStop warranty to protect against water damage caused by a defective AquaStop system.

To find out more about warranty and for registration, please visit: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties

# S ashe S (1)

# Dishwashing key features

### Welcome to a new era of dishwashing with brilliantShine.



Our new 60cm dishwashers feature the brilliantShine programme – a one touch solution that combines the Glass 40°C programme and the Shine & Dry option to ensure glassware is always left sparkling clean.

Straight from dishwasher to table, Shine & Dry provides streak-free, shining glasses. Harnessing the power of Zeolith® at its best, the special drying cycle also works just as well on plastics, pots and pans, saving time as there is no longer a need to give them an extra towel dry. The brilliantShine programme with Zeolith® Drying produces sparkling glasses to be proud of, keeping glassware ready to shine for any guests, even unexpected ones.

take care of these factors:

- in streak-free, shining glassware.
- or spray pressures, and keeps the cycle time shorter.

### Zeolith<sup>®</sup>: Super efficient drying technology.



Using advanced drying technologies, Siemens dishwashers keep energy consumption to a minimum. Zeolith®, a form of zeolite mineral, has the astonishing ability to absorb moisture and convert it to heat. The heat produced naturally by the Zeolith® is used for the drying cycle. No additional energy is therefore required to heat up the contents of the dishwasher for the drying process (as with a standard drying system). This leads to excellent drying results, with less energy usage than models without Zeolith® technology.

Zeolith® is stored in the depths of the dishwasher. It regenerates itself and keeps working for the lifetime of the machine, so it never needs replacing. Combine this with the economy 50°C programme to get brilliant results with minimal energy.



Drying phase Zeolith<sup>®</sup> absorbs moisture and converts it to he energy.

The new priority zone for gentle and thorough washing of the most valuable glasses.



#### glassZone

With glassZone, even the most valuable of glasses can go in the dishwasher with peace of mind. The six integrated nozzles ensure continuous but gentle water supply to enable thorough cleaning without damaging sensitive materials. In addition, integrated soft anti-slip elements give a secure hold to protect against mechanical stress and prevent damage to glass rims.

There are three factors in dishwashing that influence the shine of glassware: temperature, cycle time, and the use of detergent. The new brilliantShine programme offers three intelligent solutions that

• Zeolith® drying uses a Zeolite mineral that absorbs moisture and converts it into a gentle heat.

• The Shine & Dry option swills all residues of detergent with extra rinsing water, resulting

• The Glass 40°C programme ensures that glassware is not exposed to excessive temperatures

**Cleaning phase** As the mineral is heated during the cleaning cycle, it is recharged and ready to absorb moisture once more





# Dishwashing key features

#### The Home Connect app helps take minds off the household chores.

By connecting the dishwasher to the Home Connect App, programmes and options can be easily selected to start the dishwasher from wherever and whenever. The app enables out of home appliance control so dishes can be ready exactly when needed - which is perfect for busy lifestyles. When the cycle has finished, the Home Connect App will send a push notification to say so.

There are a number of great features which can be selected through the Home Connect app, such as Speed on Demand, Silence on Demand and autoOpen Dry. It is also possible to set a Favourite programme and alter the wash cycle options from anywhere.



#### easyStart menu

The easyStart feature on the Home Connect app helps with finding the correct setting for the load quickly and easily. By answering a few simple questions, the app will suggest the optimum programme for the load. It is easy to adjust the dishwasher settings via the app on a smartphone or tablet to keep it running at maximum efficiency.

#### Home Connect partner Services

It is also possible to use our partner services, such as Amazon Alexa, Google Assistant and IFTTT to manage the dishwasher. With Amazon Alexa, the appliance can be controlled via voice - just ask Alexa.

To keep on top of dishwasher tablet stock, automatic tablet replenish can be used through Smart Reorder within the Amazon Alexa app. The feature is easy to set up and saves having to worry about running out of tablets again.

Setting the water settings has never been easier too. Whether the area experiences hard or soft water, it can be easily set within the app in seconds.


IFTTT technology enables the integration of the Home Connect App with a wider array of connected devices. With customised applets, it is even easier to bring a smart home to life. For example, the lights can be set to flash when the dishwasher cycle finishes.

#### Programme Download

Paired with the Home Connect app Siemens' dishwashers can always be kept up to date with software updates. They can even be personalised by downloading free additional programmes available via the Home Connect app. Whether it is more intense programmes, intelligent programmes or even faster programmes, there are additional programmes - up to 10 depending on the model - available to suit everyone's need. Once downloaded they can also be added to favourites for even quicker access.

Learn more about Home Connect by visiting Siemens Home UK: www.siemens-home.bsh-group.com/uk

#### Basket systems for added flexibility and better results.



By adding a third shelf for cutlery, varioDrawer removes the need for a cutlery basket and creates more space.



### create more space for those larger items.

varioFlex basket system



#### flexComfort basket system

These baskets have the ability to fold down certain compartments within the cavity for extra room. The top rack has 2 areas that can be adjusted for extra flexibility. The bottom basket has 8 areas that can be adjusted to create more space so the inside of the dishwasher is constantly adaptable. Anti-slip elements and stemware support hold have also been added, meaning it has never been as easy to load the dishwasher.



#### O Y Ó flexComfort Pro basket

The flexComfort Pro basket system is designed to hold larger plates and allows easy creation of space for pots and pans. Choose from up to 6 flexible areas in the top rack and up to 8 flexible areas in the bottom basket to create extra space. Blue touchpoints inside the baskets indicate all the adjustment options available at a glance, and the easyGlide wheels on the upper basket make loading the dishwasher even easier. Other new features such as anti-slip elements and stemware support hold means it is easy to securely load glassware.



#### rackMatic<sup>™</sup> 3-stage Available across all storage solutions, this feature conveniently allows the user to raise and lower the height of the top basket to create more or less space, even when the dishwasher is loaded




#### Let the dishwasher do the work, with the automatic programme sensor.



The varioFlex basket has 2 flexible areas in the top rack and 4 in the bottom, providing extra flexibility within the dishwasher to











Doing the dishes is now easier than ever before with sensor technology included in every one of our dishwashing appliances. From soiled pots and pans to delicate plates - every item gets the right care and treatment.

For example, the autoProgramme sensor gives brilliant results at the push of a button. As soon as the autoProgramme is activated, the aqua sensor automatically measures the cloudiness of the water to precisely adapt the amount and temperature of water needed for optimal cleaning. The sensor controls the entire washing and drying process and automatically adjusts water consumption, water temperature and cycle time to suit each load. The sensor control unit steers the whole washing and drying process to deliver brilliant results every time. Model shown left:

SN27TIOOCE 60cm freestanding dishwasher

Key features | Freestanding dishwashers



# Enhanced performance and sparkling results

#### Standard features on all freestanding models.



#### intensiveZone

Delicate items and pots and pans can be cleaned together in the same wash. The intensiveZone option increases the spray pressure and temperature in the bottom basket to handle burnt on pans, whilst delicate items can be washed safely in the top basket.



#### Silence programme

When the Silence programme is selected the dishwashers noise level is reduced by 2-3dB. This is achieved by decreasing water pressure and extending run time.



#### Silence on demand

With the Home Connect App, it is possible to pause the dishwasher for up to 30 minutes by selecting Silence on Demand via the Home Connect App if silence is needed during the washing cycle.



varioSpeed Plus Use the varioSpeed Plus button to run the dishwasher significantly faster without compromising on wash quality.




losageAssist

#### Speed on demand

An advanced functionality of varioSpeed Plus that cleans and dries the dishes in the shortest possible time for individual needs. This option can be activated, even when a programme is already running, within the Home Connect app.

#### dosageAssist





#### Favourite

The Favourite button makes the dishwasher even more personal. By entering the most used combination of dishwashing programmes and options, they can be conveniently started at the touch of a button, via the Home Connect app or via the Alexa voice assistant.

#### aquaSensor



Makes sure that the optimum temperature is used depending on how dirty the dishes are, meaning that dishes are perfectly clean the first time round.

#### Heat exchanger



Protect glasses from cracking with gentle water heating. Heat generated during the wash cycle is used to pre-heat the rinsing water to stop glasses being put under stress.

#### extraDry



The extraDry option can be added to any programme and will extend the drying cycle. This can be useful for harder to dry loads.

#### loadSensor



By monitoring that the optimum amount of water is flowing through the dishwasher throughout the cycle, the loadSensor helps to ensure that dishes are cleaned thoroughly.



Machine Care with Siemens dishwashers

drying, it is important that the dishwasher is

looked after correctly. All of our freestanding

Siemens dishwashers include the Machine

Care Programme. This is designed to be

detergent and provides a short, high

the appliance running as efficiently

as possible.

used together with a dishwasher cleaning

temperature, high pressure wash designed

inside the dishwasher and outlet pipes. The

to remove limescale and grease build up

dishwasher will send a reminder every 30

cycles or so to run this programme, to keep

For excellent results when washing and

### freestanding models.



Â

Hygiene Plus

Î Î Î Î

TFT Display

Hvaiene Plus





#### Features | Freestanding dishwashers

Highlight features, available on selected

#### TFT display with real-time clock

The clear, touch control high resolution TFT display makes it easy to select programmes and settings and check the status of the dishwasher at a glance. Thanks to the real-time clock, it is now possible to set the exact time the dishes will be ready by, for extra convenience. Perfect for delivering warm plates to the dinner table.

#### autoOpen dry

Gentle drying thanks to autoOpen dry. During the drying process, the door opens automatically and gently. This allows the natural drying of the dishes without the need for additional energy.

The Hygiene Plus setting is ideal for chopping boards and food containers. It heats up to extra high temperature in the final rinse for maximum hygiene.


#### emotionLight

The emotionLight uses LED lights to create a cool blue glow emanating from inside your dishwasher.



### Dishwasher product overview

Freestanding 60cm dishwasher range

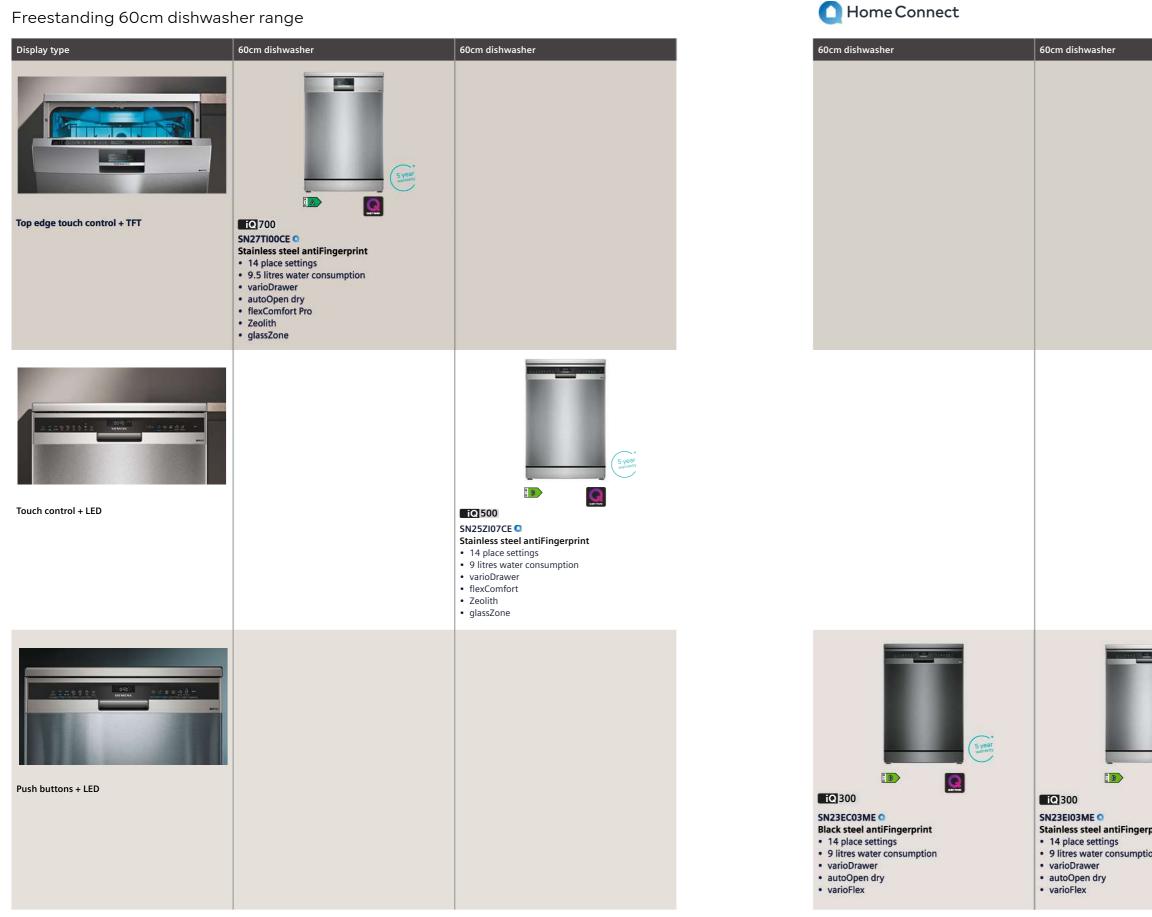

	60cm dishwasher
print on	Image: state of the state

### 60cm dishwashers

600mm

#### Q 700 SN27TI00CE

60cm freestanding dishwasher Stainless steel antiFingerprint

O Home	Connect	Zeolith <sup>®</sup> - Drying	autoOpen dry	TFT Display
flexComfort Pro basket	varioDrawer	aquaSensor	In adSensor	JJJ glassZone
	emotionLight			
5 year warranty	AquaStop	QUIET MARK	A G A	

specifications	
APPLIANCE TYPE	60CM FREESTANDING DISHWASHER
Design family	iQ 700
Model number	5N27TI00CE
Colour	Stainless steel
DESIGN FEATURES	
Drying system	Zeolith / autoOpen dry
Home Connect Wi-Fi connectivity	
Control panel type	Top edge touch control + TFT
Basket description	flexComfort Pro
varioDrawer (3rd loading level)	
glassZone	
Glass care technology	
Anti-slip protection / stemware support upper basket	■/■
Adjustable upper basket	rackMatic <sup>™</sup> 3-stage
Number of flip tines in upper / lower basket	6/8
Cup shelves upper / lower baskets	212
Cutlery holder lower basket	-
Largest loadable dish upper / lower basket (cm)	21/30
aquaSensor	
Real-time clock	
Start delay time max hours	24
Time remaining indicator	
Emotion light (interior lighting)	
End of cycle indicator	Acoustic
Salt / Rinse aid light indicator	
Self cleaning filter system	
Flood protection system	AquaStop 24h
Safety features	Door lock
PROGRAMMES / FUNCTIONS	
List of programmes	Intelligent 40°C, Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 60°C, brilliantShine 40 Silence 50°C, Favourite, Machine Care
Additional special options	Remote Start, Shine & Dry, intensiveZone, Hygiene Plus, varioSpeed Plus
TECHNICAL INFORMATION	
Reference programme for measurements	Eco 50°C
Energy efficiency class <sup>1</sup>	A A
Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres)	54/9.5
Load capacity (place settings)	14
Programme duration <sup>4</sup> (h:min)	4:55
Noise level (dB [A] re 1pW)	44
Noise efficiency class	в
Noise level (silence programme) (dB [A] re 1pW)	42
Maximum height adjustability feet (mm)	2
Depth with open door 90 degree (cm)	115.5
separanti open uoor so degree (CIII)	175
Length of electrical supply cord (cm)	165 / 190
Length of electrical supply cord (cm)	84.5
Length of electrical supply cord (cm) Length inlet / outlet hose (cm) Height of the product with removable top (cm)	84.5
Length of electrical supply cord (cm) Length inlet / outlet hose (cm)	84.5 81.5
Length of electrical supply cord (cm) Length inlet / outlet hose (cm) Height of the product with removable top (cm) Height of the product without removable top (cm)	84.5
Length of electrical supply cord (cm) Length inlet / outlet hose (cm) Height of the product with removable top (cm) Height of the product without removable top (cm) Width / Depth of the product (cm)	84.5 81.5 60/60
Length of electrical supply cord (cm) Length inlet / outlet hose (cm) Height of the product with removable top (cm) Height of the product without removable top (cm) Width / Depth of the product (cm) Net weight / Gross weight (kg)	84.5 81.5 60 / 60 54 / 56
Length of electrical supply cord (cm) Length inlet / outlet hose (cm) Height of the product with removable top (cm) Height of the product without removable top (cm) Width / Depth of the product (cm) Net weight / Gross weight (kg) Water softener <sup>3</sup>	84.5 81.5 60/60 54/56

5 year warranty

Q

100

Yes, model has this feature. – Feature not available for this model.

Yes, model has this teature. - Feature not available for this model.
 On an energy-efficiency class scale from A to G.
 Energy consumption in kWh/100 operating cycles (using Eco programme).
 Water consumption in litres/operating cycle (using Eco programme).
 Duration of Eco programme.
 We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water oftener produces softened water oftenes than 01/tire (2/0<sup>2</sup>) and the water softener in the appliance is turned off. Please contact product advice for further information. Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to % screwed joint.
 Data valid in this table as 6 davil 2024. Subject to modification without prior potice.

Data valid in this table as of April 2024. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.24 - 31.03.25. T&C's apply. Online registration required.

* Syear warranty	
GUETMARK	



Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 - 31.03.25. T&C's apply. Online registration required.

	5 year warranty	5 year warranty	5 year warranty	5 year warranty
	OMIT TORAC		CIETMAX	OLIFY MAKE
60cm freestanding dishwasher specifications				
APPLIANCE TYPE		60CM FREESTAND	ING DISHWASHERS	
Design family	iQ 500	iQ 300	iQ 300	iQ 300
Nodel number Colour	SN25ZI07CE Stainless steel	SN23EC03ME Black steel	SN23EI03ME Stainless steel	SN23EW03ME White
DESIGN FEATURES	Stanness steel	black steel	Stall ness steel	Write
Irying system	Zeolith	autoOpen dry / Heat exchanger	autoOpen dry / Heat exchanger	autoOpen dry / Heat exchanger
lome Connect Wi-Fi connectivity				
ontrol panel type	Touch control + LED	Push buttons + LED	Push buttons + LED	Push buttons + LED
asket description	flexComfort	varioFlex	varioFlex	varioFlex
arioDrawer (3rd loading level) lassZone				
lass care technology		-	-	
nti-slip protection / stemware support upper basket		-1-	-1-	-1-
djustable upper basket	rackMatic <sup>™</sup> 3-stage	rackMatic <sup>™</sup> 3-stage	rackMatic <sup>™</sup> 3-stage	rackMatic <sup>™</sup> 3-stage
umber of flip tines in upper / lower basket	2/8	2/4	2/4	2/4
up shelves upper / lower baskets	2/2	2/-	21-	21-
utlery holder lower basket	-	-	-	-
argest loadable dish upper / lower basket (cm)	21/30	21/30	21/30	21/30
quaSensor eal-time clock	-			
art delay time max hours	24	24	24	24
me remaining indicator				
motion light (interior lighting)		_	-	-
nd of cycle indicator	-	-	-	-
alt / Rinse aid light indicator	■ / ■	■/■	■/■	■/■
elf cleaning filter system				
lood protection system afety features	AquaStop 24h Control panel lock, door lock	AquaStop 24h Control panel lock, door lock	AquaStop 24h Control panel lock, door lock	AquaStop 24h Control panel lock, door lock
ROGRAMMES / FUNCTIONS	Control panel lock, door lock	Control panel lock, door lock	control panel lock, door lock	Control parier lock, door lock
st of programmes	Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care	Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 65°C, Speed 45°C, Favourite, Machine Care	Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 65°C, Speed 45°C, Favourite, Machine Care	Eco 50°C, Auto 45-65°C, Intensive 7 Speed 65°C, Speed 45°C, Favourit Machine Care
dditional special options	Remote Start, Shine & Dry, intensiveZone, varioSpeed Plus	Remote Start, intensiveZone, Half Load, varioSpeed Plus	Remote Start, intensiveZone, Half Load, varioSpeed Plus	Remote Start, intensiveZone, Half Load, varioSpeed Plus
ECHNICAL INFORMATION				
eference programme for measurements	Eco 50°C	Eco 50°C	Eco 50°C	Eco 50°C
nergy efficiency class <sup>1</sup>	₿ B	<b>B</b>	Ê B	ê B
nergy² / water³ (kWh / litres)	65/9	65/9	65/9	65/9
ad capacity (place settings)	14	14	14	14
ogramme duration <sup>4</sup> (h:min)	3:35	3:35	3:35	3:35
oise level (dB [A] re 1pW) oise efficiency class	40 B	42 B	42 B	42 B
oise level (silence programme) (dB [A] re 1pW)	39	В	в	B
laximum height adjustability feet (mm)	2	2	2	2
epth with open door 90 degree (cm)	115.5	115.5	115.5	115.5
ength of electrical supply cord (cm)	175	175	175	175
ength inlet / outlet hose (cm)	165 / 190	165/190	165/190	165/190
eight of the product with removable top (cm) eight of the product without removable top (cm)	84.5 81.5	84.5 81.5	84.5	84.5
idth / Depth of the product (cm)	60/60	60/60	60/60	60/60
et weight / Gross weight (kg)	55/56	52/54	52/54	52/54
later softener <sup>s</sup>	-			
aximum accepted water hardness (°DH)	50	50	50	50
laximum temperature for water intake (°C)	60	60	60	60
nterior cavity	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Yes, model has this feature. – Feature not availa on an energy-efficiency class scale from A to G. nergy consumption in kWh/100 operating cycles (using Vater consumption in litres/operating cycle (using Eco Juration of Eco programme. We would recommend our dishwashers are connected n external water softener as long as the	ng Eco programme). programme).	owever, they may also be connected to		

#### 60cm dishwashers | Freestanding dishwashers

contact product advice for further information. Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to %" screwed joint.

Laundry care, high performance with state-of-the-art technology

Siemens' built-in laundry range is intelligently designed and quietly efficient to make laundry easier and less of a chore.

Our machines are the perfect blend of cutting-edge technology and innovative design. Siemens built-in washing machines and washer dryers seamlessly integrate into any space - and with a focus on efficiency and convenience, they quietly deliver beautifully clean clothes.



#### Siemens home laundry warranties:



5 year warranty

A five year warranty is available on the built-in washing machine listed in this brochure to protect against manufacturing and material faults during this warranty period.

Offer dates: 01.04.24 - 31.03.25. Online registration required. For full T&Cs and qualifying appliances visit siemens-home.bsh-group.com/uk/customer-service/ siemens-warranties



2 year warranty A two year warranty is available on all Siemens built-in washer dryers listed in this brochure to protect against manufacturing and material faults during this warranty period.



#### AquaStop Lifetime Warranty

Selected Siemens laundry appliances have a lifetime AquaStop warranty to protect against water damage caused by a defective AquaStop system. For models with this warranty please check the matrix.

To find out more about warranty and for registration, please visit: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties



#### iQdrive® Motor 10 Year Warranty

The iQdrive® Motor Warranty is available on selected laundry machines to protect against any defects to the iQdrive<sup>®</sup> motor. For models with this warranty please check the laundry matrix.

# Laundry care key features



Our laundry appliances are designed to make laundry easier and less of a chore. They can be neatly concealed behind the door, maintaining clean lines and modern aesthetics. With a range of key features, doing laundry has never been more convenient.



#### reload

The reload function is the perfect solution when an extra item needs to be added to the load. Once the icon is displayed, the washing machine can be paused and extra items can easily be added in.

#### Foam detection

Detects if too much foam has been created in the wash, if so, it will adjust the drum movement and add an extra rinse cycle if necessary.

#### rapid15



٢

Washes, rinses and spins lightly soiled clothing in just 15 minutes. Designed for those with busy lifestyles.

#### Extremely quiet washing machines

Thanks to the brushless iQdrive motor and antiVibration side panels, Siemens built-in washing machines are particularly quiet in their class.

#### Extremely quiet washer dryers

Our washer dryers are designed to be as quiet as possible while still offering excellent performance and results when washing and drying.



Wool programme

An exceptionally gentle woollen hand wash programme. The drum is set to provide a cradle motion, with only an occasional rotation, giving a soft wash action. A special spin phase finishes the cycle.



### Shirts/Blouses

The ideal programme for a week's worth of shirts, offering a reduced spin to reduce ironing. Suitable for up to 2kg worth of washing, this cycle is designed to run for just over an hour.

#### Mixed fabrics Perfect for the cottons, and ha Load up to 4kg

Perfect for the mid-week wash of a mixture of cottons, and hard-wearing or easy-care fabrics. Load up to 4kg worth of garments with a running time of just 49 minutes.

#### Delicates/silk



This gentle programme is perfect for those delicate, washable fabrics, e.g. silk, satin, synthetics or blended fabrics (e.g. curtains). Cool temperatures, gentle spinning between the rinse cycles, and reduced final spin speeds reduce creases dramatically. Key features | Built-in laundry appliances

	-65	=0			⊳00	
<u>~ ≪</u> ∋ Spin Speed	<u>3 sec. —</u> Ready In	vario Speed	Water & Rinse Plus	Pre- wash	Start Reload	
~						
	/				6	
		1			0	==



#### Model shown above: WI14W502GB



Model shown: WI14W502GB

# The complete laundry solution with features that fit around any lifestyle

Features specific to integrated washing machines.

Check model for available functions.



Capacity The large 8kg drum capacity is the perfect size to hold more laundry and reduce the number of loads to wash.



ΞŮ

rioSpeed

#### Drum Clean

An automatic alert after 20 washes to run the Drum Clean programme on a 90°C or 60°C wash keeps the appliance clean and odour free.

#### varioSpeed

This feature can automatically detect when time can be saved. The smart sensor identifies load volume and textile kind, to adapt the washing machine's programme time efficiently to suit the specific load, delivering perfectly clean laundry in up to 55% less time.



### timeLight

Stay in control. The timeLight projects the remaining cycle time and programme status onto any floor surface to keep the consumer informed at a glance, and is visible without opening the cabinet door.







#### Features specific to integrated washer dryers.

Check model for available functions.



Washing capacity The large 7kg washing capacity ensures clothes can be washed with fewer loads.



Drying capacity The 4kg drying capacity ensures clothes can be dried effectively.



### Washing + Drying

The continuous washing and drying cycle is suitable for loads up to 4kg. This cycle will first wash clothes on the chosen setting and once finished, will automatically switch to drying the clothes for ease and speed.



#### autoDry

Gently dries laundry to the exact degree of dryness desired.



#### ActiveWater™

Helps to reduce water consumption thanks to a 2-step automatic load adjustment system.



#### Fluff removal programme

A ten minute fluff removal cycle on washer dryers that removes fluff deposits in the machine. A light indicates when this is needed.



#### Outdoor


Specialised programme for washing waterproof clothing with membrane technology to protect the fabric and seams. For use with outdoor fabric detergent.

### Washing machines

#### Q 700 WI14W502GB

Built-in washing machine White 1400rpm spin speed





Integrated washing machine specifications	
APPLIANCE TYPE	BUILT-IN WASHING MACHINE
Design family	iQ 700
Model number	WI14W502GB
PROGRAMMES / FUNCTIONS	11141150200
Standard Washing Programmes	
Eco 40-60	
Cottons	
Easy-care programme	
Wool programme	
Delicates/silk	
Mixed fabrics	
Additional Programmes	
rapid15'/rapid30'	
rapid60	
Outdoor (waterproofing)	
Shirts/blouses	
Duvet Dark Wash	
Hygiene 60°C	-
Reduced noise wash	
Spin/Drain Rinse	
Options	
Extra rinse	
Prewash	
Variable temperature	
Variable temperature	
varioSpeed	
ADDITIONAL FEATURES	
timeLight	
iQDrive®	
AquaStop	
reload	
Foam detection	
Drum Clean	
PERFORMANCE & CONSUMPTION	
Energy efficiency class1	
Load capacity (kg)	1 - 8
Energy² / Water³ (kWh / litres)	62 / 45
Programme duration <sup>4</sup> (h:mm)	3:26
Maximum spin speed (rpm) <sup>5</sup>	1400
Spin efficiency class	В
Noise level (dB [A] re 1pW)	66
Noise emission class	A
Drum volume (litres)	55
TECHNICAL INFORMATION	
Dimensions of the product: H x W x D (inc. hinge and 19mm door) (mm)	818 x 596 x 544 (574)
Door opening angle	130°
Depth with door open 90° (mm)	956
Height adjustable by (mm)	12
Length of electrical supply cord (mm)	2100
Length of supply hose / drain hose (mm)	220/220
Door hinge (door porthole)	Left-hand
Cabinet colour	White
OPTIONAL ACCESSORY FOR WASHING MACHINE Floor securing component	WX975600
. isos securing component	WX973600

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> On an energy-efficiency class scale from A to G. <sup>2</sup> Energy consumption in kWh/100 operating cycles (using Eco 40-60 programme). <sup>3</sup> Water consumption in litres/operating cycle (using Eco 40-60 programme). <sup>4</sup> Duration of Eco 40-60 programme. <sup>5</sup> The specified value is rounded.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.



### Washer dryers

#### iQ 500 WK14D543GB

Built-in washer dryer White 1400rpm spin speed





specifications APPLIANCE TYPE Design family Model number

PROGRAMMES / Eco 40-60 Cottons Easy-care program Wool programme Delicates/silk

Energy<sup>3</sup> / Water<sup>4</sup> w Energy<sup>5</sup> / Water<sup>6</sup> w Load capacity was Programme duratio Spin efficiency clas Spin speed<sup>8</sup> (rpm) Noise level (dB [A]

#### Noise emission clas Drum volume (litr TECHNICAL INFOR

<sup>1.2</sup> On an energy-efficiency class scale from A to G. <sup>3</sup> Energy consumption in kWh1100 complete operating cycles (using Eco 40-60 programme). <sup>4</sup> Water consumption in litres/complete operating cycle (using Eco 40-60 programme). <sup>5</sup> Energy consumption in kWh1100 wash cycles (using Eco 40-60 programme). <sup>4</sup> Water consumption in litres/wash cycles (using Eco 40-60 programme). <sup>9</sup> Duration of Eco 40-60 programme, complete operating cycle / wash cycle. <sup>8</sup> The specified value is rounded.

For the full range of accessories please visit our online accessory shop on siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

#### Washer dryers | Built-in laundry appliances







Integrated washer dryer

APPLIANCE TYPE	BUILT-IN WASHER DRYERS		
Design family	iQ 500	iQ 300	
Model number	WK14D543GB	WK14D322GB	
PROGRAMMES / FUNCTIONS			
Standard Washing Programmes			
Eco 40-60			
Cottons			
Easy-care programme			
Wool programme			
Delicates/silk			
Rinse/Spin			
Drain/Spin			
Additional Programmes			
Hygiene		-	
rapid15		-	
Night wash		-	
Shirts/blouses		-	
Outdoor		-	
Mixed fabrics		-	
Drying programmes			
Gentle dry			
Intensive dry			
Fluff removal programme			
Options			
flexiTime			
Easy iron			
Intensive		<b>E</b>	
Water Plus	<u> </u>		
Rinse hold		<b>_</b>	
Prewash			
Variable spin / Variable temperature		■/-	
ADDITIONAL FEATURES			
autoDry		-	
AquaStop		-	
Foam detection			
autoLoad			
Time delay	24h	24h	
PERFORMANCE & CONSUMPTION			
Energy efficiency class washing and drying <sup>1</sup>	ê E	Ê.	
Energy efficiency class washing <sup>2</sup>	ÊE	<u>↓</u>	
Energy <sup>3</sup> / Water <sup>4</sup> washing and drying (kWh / litres)	266 / 68	266 / 68	
Energy <sup>s</sup> / Water <sup>e</sup> washing (kWh / litres)	77/44	77 / 44	
Load capacity washing and drying / washing (kg)	417	4/7	
Programme duration <sup>7</sup> washing and drying / washing (h:mm)	5:30 / 2:50	5:30 / 2:50	
Spin efficiency class	В	В	
Spin speed <sup>8</sup> (rpm)	1400	1400	
Noise level (dB [A] re 1pW)	72	72	
Noise emission class	A	A	
Drum volume (litres)	52	52	
TECHNICAL INFORMATION			
Dimensions of the product: H x W x D (inc. hinge and 19mm door) (mm)	820 x 595 x 560 (584)	820 x 595 x 560 (584)	
Door opening angle	95°	95°	
Depth with door open 90° (mm)	960	960	
Height adjustable by (mm)	15	15	
Length of electrical supply cord (mm)	2200	2200	
Length of supply hose / drain hose (mm)	200/200	200 / 200	
Door hinge (door porthole)	Left-hand	Left-hand	
Cabinet colour	White	White	


Yes, model has this feature. – Feature not available for this model.


Data valid in this table as of April 2024. Subject to modification without prior notice.


### Laundry appliance technical diagrams

#### Integrated washing machine WI14W502GB

Z detail










15+12

### Integrated washer dryers WK14D543GB and WK14D322GB














# Welcome to a freestanding range with a host of intelligent laundry solutions

Siemens' freestanding washing machines, washer dryers and tumble dryers deliver outstanding results every time.

Sleek, streamlined, and stylish, Siemens freestanding laundry appliances not only look great in the home, they perform perfectly too. With state-of-the-art technology Siemens freestanding washing machines are extremely energy efficient, easy to use, and most importantly designed to save time and resources.

All Siemens freestanding tumble dryers feature sensor drying, which provides uniform drying results, and makes over-drying a thing of the past, meaning laundry is easier and less of a chore.

Siemens freestanding washer dryers combine the innovative functions of the modern washing machines and dryers in one appliance to save effort, time and space. Conveniently control both washing and drying cycles, at the touch of a button, with the large display and clear operation on these intelligent appliances.



#### Siemens home laundry warranties:



#### 5 year warranty

A five year warranty is available on all freestanding washing machine, washer dryer and tumble dryer models listed in this brochure to protect against manufacturing and material faults during this warranty period.

Offer dates: 01.04.24 - 31.03.25. Online registration required. For full T&Cs and qualifying appliances visit siemens-home.bshgroup.com/uk/customer-service/siemens-warranties



Lifetime AquaStop Warranty Selected Siemens laundry appliances have a lifetime AquaStop warranty to protect against water damage caused by a defective AquaStop system. For models with this warranty please check the matrix.



iQdrive® 10 Year Warranty The iQdrive<sup>®</sup> Motor Warranty is available on all washing machines to protect against any defects to the iQdrive® motor.

To find out more about warranty and for registration, please visit: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties



# Rethink laundry care with the Siemens Intelligent Utility Room

When space is no issue, a dedicated utility room can offer more convenience, efficiency, and organisation.

All the laundry essentials - detergents, fabric softeners, ironing board - can be found in one organised, easy-to-access place. A laundry room offers ample storage, helping to keep the home clutter-free and laundry essentials at one's fingertips.

Above all, a laundry room is a time-saver. With everything needed in one place to wash, dry, fold, and iron in record time.

Our advanced laundry technology further delivers control, convenience and flexibility to the process with appliances designed to not only clean clothes but also to automate as much of the process as possible to free time for more important tasks.



Siemens laundry appliances are designed to be intelligent and efficient, knowing exactly when to start a wash cycle to maximise energy efficiency, and when to adjust water levels based on the load size to preserve resources. They dispense the optimal dosage of detergent, ensuring excellent results. With the Home Connect app, stay informed and educated on the best programmes to save resources or time, and easily access the most frequently used programmes. A laundry room that truly adapts to individual needs.

Even with limited space for laundry appliances, these washing machines, tumble dryers and washer dryers still seamlessly fit into an everyday kitchen. Our appliances are equipped with great features, offering convenience and efficiency as the standard.



### Siemens laundry appliances are full of innovative features designed to effortlessly maintain the quality and appearance of clothes.

Time saving programmes, a targeted stainRemoval feature, reduced ironing cycles, and the smart connection between the washer and dryer, simplify every aspect of doing laundry.

A new level of convenience.

reload

is running.

### $\triangleright$ reload Function

antiVibratio Design


The reload function allows the machine to be paused and the door opened, to add any extra item to the load at the next safe opportunity while a programme

### antiVibration $\bigcirc$

Having antiVibration technology built-in to the design of the machine makes the appliance more stable, which, in turn, makes it quieter.

#### powerSpeed 59 system

With the powerSpeed system, the laundry gets evenly soaked and heated up much faster and more consistently, for more thorough washing. Suited for up to 5kg of cottons or blended fabrics, the powerSpeed 59 result is achieved by a second pump that feeds the water into the drum at the beginning of the washing process. In parallel, the detergent is mixed with water and gets sprayed into the centre of the load, shortening the run time to only 59 minutes and increasing the wash performance.



-\_(59)


werSneed59

#### rapid15 and rapid30

Need a clean shirt an hour before leaving the house? The rapid15 and rapid30 washing programmes are the perfect solution. These innovative features wash, rinse and spin clothes in under an hour.







Drum interior light The drum is lit after switching on the appliance, after opening and closing the door, and after starting the programme for extra convenience. The light

switches off automatically.

6 Less Ironing

a minimum



#### Key features | Freestanding laundry appliances

#### Less Ironing option

At the touch of a button, 'Less Ironing' can be added to a selected programme. This ensures the machine gently and evenly drains the water and reduces the spin speed, helping to keep creases to







#### Outdoor

Specialised programme for washing waterproof clothing with membrane technology to protect the fabric and seams. For use with outdoor fabric detergent.

#### Outdoor/waterproof

This programme can be used to apply a waterproof treatment to breathable fabrics, prolonging the life of high-quality functional clothing like winter jackets, fleeces and ski wear.

### **Efficient laundry** care intuiti

### Siemens washing machines take the hassle out of doing laundry.

Our machines take full advantage of the latest technology and innovation, and are designed to make laundry less of a chore.



#### Automatic programmes

Whether normal or delicate items - the automatic programme's 'Auto' function adjusts the entire wash cycle to suit various laundry needs for optimum effect. Perfect for hard-wearing fabrics this mode will even add extra detergent if the washing is heavily soiled.



#### Meets the highest hygiene standards: The Drum Clean programme

An automatic alert after 20 washes notifies when to run the Drum Clean programme on a 90°C or 60°C wash which keeps the appliance clean and odour free.



lygiene

#### Get perfectly clean laundry in up to 65%\* less time with varioSpeed

Available on all our washing machines, this feature can automatically detect when time can be saved. The smart sensors identify load volume and type of textile, hence adapting the washing machine's process time efficiently to suit the specific load.

Hygienically clean laundry:

suitable for people with allergies.

The hygiene programme is particularly

The hygiene programme

\*Difference between the duration of the Easy Care Programme 40°C and the duration of the Easy Care Programme 40°C in combination with the arioSpeed optic



needed, every time.

Use the Home Connect app to guide programme selection. Home Connect gives a description of each programme, and an indication of its energy and water consumption, so the best decisions are made for certain laundry needs. Home Connect also enables the washing machine and the dryer to work together. The dryer automatically chooses the right programme and the most suitable drying target based on the load washed in the washing machine.

#### **Connected partners**

For more information about Home Connect, visit Siemens Home UK: siemens-home.bsh-group.com/uk

Or scan the QR code to learn more about our smart laundry appliances.

### Take a load off with Home Connect.

Siemens' smart washing machines, with Home Connect, have exciting features that provide more flexibility and choice when doing laundry.

#### Optimal dosing of detergent

i-Dos accurately dispenses detergent based on fabric type, water hardness and degree of soiling. With the detergent scan on the Home Connect app, the intelligentDosing can even be further optimised. Simply scan the chosen detergent and fabric softener and Home Connect will set up the ideal dosage settings perfectly, only using the exact amount of detergent

#### Match the laundry programme to specific needs

With our connected partners - Amazon Alexa, Google Home and IFTTT - any living space can be turned into a fully connected home. Speak to appliances simply by asking Amazon Alexa or Google Home voice assistant. With the IFTTT app, Home Connect appliances can be connected to a wider range of smart devices. Set up applets and digital commands to create bespoke solutions such as programming smart lights to flash when the laundry cycle ends.



# Washing machine key features

#### Clear display for easy selection.

All our models feature easy to use, intuitive LED displays to provide a full overview and make operation effortless.



Display shown: WG46G2Z9GB iQ500 washing machine



Display shown: WG56B2A1GB iQ700 washing machine

#### Just add laundry with i-Dos.



The i-Dos system automatically determines how much detergent is needed for each wash load, based on the weight of the laundry and programme used. Once the laundry is placed in the drum the intelligent washing machine will automatically determine the optimum allocation of detergent.

The built-in drawer conveniently holds enough liquid detergent for around 20 washes which removes the need to measure and fill the container for every wash. As the correct amount of liquid detergent is used every time, clothes will receive the perfect wash whilst saving time, water and detergent. Resulting in hasslefree laundry and perfectly clean clothes. With Home Connect, the detergent scan feature will even further adjust the dosing based on the detergent used.



#### Tough on stains, gentle on clothes.



With the stainRemoval system, tough stains can be removed effortlessly without the need for specialist products or pre-washing. After loading clothes in the machine, up to 16 stain treatments\* are available to select from.

Whether it is red wine or coffee, dirt or grass, blood or even cosmetics, our stainRemoval system automatically optimises the wash settings to remove individual stains from laundry. The system tailors the wash according to the nature of the stain, creating the perfect balance between the mechanical drum action, water level, wash time and temperature, thus, saving time, money on buying specialist products and removing the need for pre-washing. Unforeseen accidents need not ruin clothes anymore.





Fast and efficient washing machines with added peace of mind.

\*Offer dates: 01.04.24 - 31.03.25. Online registration required. For full T&Cs and qualifying appliances visit siemens-home.bshgroup.com/uk/customer-service/siemens-warranties

# A breath of fresh air:

# Siemens Washer Dryers

Enjoy the luxury of complete laundry care without needing a lot of space.





हिन्द्रम

selfCleaning condenser

#### varioSpeed

Get perfectly clean laundry in up to 65%\* less time. This feature can automatically detect when time can be saved. The smart sensor identifies load volume and textile kind, hence adapting the washing machine's process time efficiently to suit the specific load.

#### autoDry

 $= \sum_{i=1}^{n} \mathbf{A}_{i}^{i} = \sum_{i=1}^{n} \mathbf{A}_{i}^{i} = \mathbf{A}_{i}^{i}$ autoDry technology prevents overheating or uneven drying. Sensors precisely measure and control the temperature and moisture of laundry, preventing it utoDry from shrinking.

#### selfCleaning condenser (Washer Dryers and Tumble Dryer)

An automatic selfCleaning condenser is integrated into many Siemens laundry appliances helping to keep the condenser lint free. This sensor-controlled programme is intuitive and collects lint during each drying cycle. The result is a continually lint-free condenser that helps to keep energy consumption constantly low at all times. The fluff just needs to be removed from the lint filter after every cycle.

\*Difference between the duration of the Easy Care Programme 40°C and the duration of the Easy Care Programme 40°C in combination with the varioSpeed opti



Fast and efficient washer dryers with added peace of mind.

To find out more about warranty and for registration, please visit: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties



The i-Dos system automatically determines how much detergent is needed for each wash load, based on the weight of the laundry and programme used. Once the laundry is placed in the drum the intelligent washing machine will automatically determine the optimum allocation of detergent.

The built-in drawer conveniently holds enough liquid detergent for around 20 washes which removes the need to measure and fill the container for every wash. As the correct amount of liquid detergent is used every time, clothes will receive the perfect wash whilst saving time, water and detergent. Resulting in hassle-free laundry and perfectly clean clothes.





With just one push of the button, the washer dryer perfectly washes and carefully dries up to 1kg of laundry in only 60 minutes. Perfect for when clothes need to be prepared quickly.



average load.




The 10.5kg washer dryer The 10.5kg washer dryer model provides ultimate convenience. Ideal for families, achieve everything in one go with the ability to wash and dry a larger-than-





#### smartFinish

The smartFinish programme uses gentle steam to reduce wrinkles, cutting down ironing time. Even badly wrinkled shirts and blouses are significantly smoothed out.

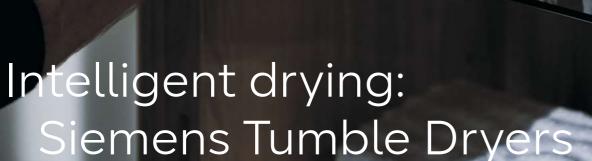

With the latest technology built into our appliances, Siemens offers energy-efficient and stunning looking appliances for stylish kitchens and utility spaces.



#### Take the guess work out of drying

Home Connect enables the washer and dryer to work together. The dryer automatically chooses the right programme and the most suitable drying target based on the load washed in the washing machine. intelligentDry guarantees precise drying results with maximum protection. Let Home Connect do the thinking.









Siemens heat pump dryers achieve impressive energy values and consume significantly less energy than condensation dryers. Our heat pump dryers can also be set up, like all condensation dryers, in multiple places within the home, since the condensed water is collected in a separate container integrated into the appliance. Alternatively, if preferred, the water can be drained out if plumbing allows.

Sensor drying



All Siemens tumble dryers feature sensor drying, which provides uniform drying results, and makes over-drying a thing of the past. Sensors in the drum continually monitor the residual moisture in the laundry. They detect when the load has reached the selected drying level, and move the programme to the final cool-down period.



A lot less ironing The Less Ironing option extends the anti-crease phase period at the end of the cycle by up to 120 minutes leading to fewer creases in laundry - so less time is spent ironing.





Ξ(T)

The rapid40 drying programme With this programme, washing will be perfectly dry in only 40 minutes, thanks to optimised temperature control and a customised cool-down phase.

Wool drying

Wool drying basket

Stacking kits

Product codes: WZ27410 (standard) / WZ27400 (with pull-out shelf).



\*Offer dates: 01.04.24 – 31.03.25. Online registration required. For full T&Cs and qualifying appliances visit siemens-home.bsh-group.com/uk/customer-service/siemens-warranties

282

#### High-performance and highly-efficient (Tumble Dryers only)

Be fascinated by the state-of-the-art technology of Siemens heat pump dryers. Heat pump dryers are condensation dryers equipped with a special heat pump technology. In contrast to classic condensation dryers, energy in the form of heat is not discharged into the environment; instead it is retained for the drying process.

This feature can automatically detect when time can be saved. The smart sensor identifies load volume and textile kind to adapt the tumble dryer's programme time efficiently to suit the specific load.

#### Wool or shoe drying basket

To further protect garments and materials during the drying process, Siemens iQ500 and iQ700 tumble dryers come with a drying basket. Warm air is then gently passed around the garments, rather than tumbling them.






Shoe drying basket


Not only helping to stabilise the dryer on top of the washing machine, the shelf allows the easy loading and unloading of the dryer.

#### State-of-the-art technology is at the heart of all Siemens tumble dryers.

### Laundry appliance product overview

Freestanding washing machine and tumble dryer range

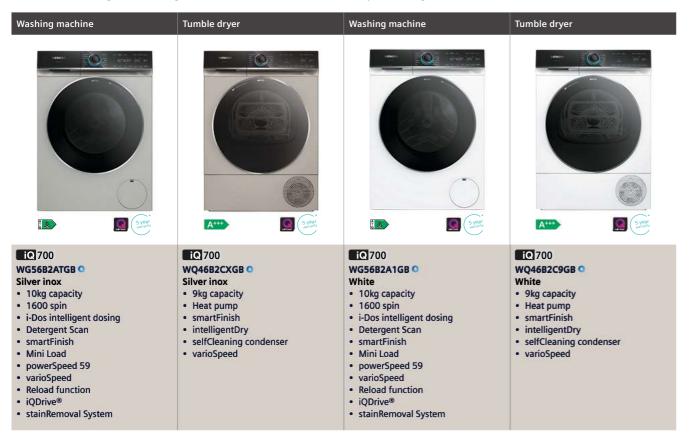

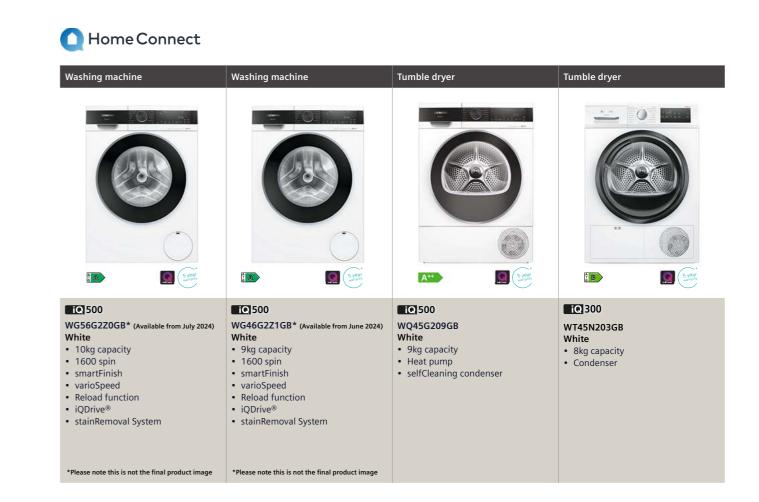

#### Freestanding washer dryer range



284 Please note: This overview table only shows some of the key features of each product to help with product selection. Please check matrix tables for full product specification.

\*5 year warranty - Offer dates: 01.04.24 - 31.03.25. T&C's apply. Online registration required.

### Washing machines





GUETHAN





#### Freestanding washing machine

specifications			
APPLIANCE TYPE		FREESTANDING WASHING MACHINES	
Design family		iQ 500	iQ 500
Model number	WG56B2ATGB	WG56G2Z0GB	WG46G2Z1GB
Colour	Silver inox	White	White
KEY FEATURES			
smartFinish	<b>B</b>		
Detergent Scan		-	-
Mini Load		-	-
Home Connect		-	-
-Dos intelligent dosing system		-	-
powerSpeed 59'		-	-
varioSpeed			
Reload function			
QDrive®			
antiVibration design			
stainRemoval System	•		
ADDITIONAL FEATURES	_		_
Variable temperature / Variable spin			
Drum interior light			
Display	LED	LED	LED
Control panel lock			
Delay start by (h)	24	24	24
Drum Clean programme	via APP		
Water protection system	AquaStop	Multiple water protection	Multiple water protection
STANDARD PROGRAMMES			
Eco 40-60	•		
Cottons			
Easy Care / Mixed	■ / ■	■/■	■ / ■
Delicate/Silk / Wool			
ADDITIONAL PROGRAMMES / FUNCTIONS			
Auto programme	•	-	-
Hygiene	via APP		
Rapid 15' / Rapid 30'			 <b>•</b> / •
Shirts	via APP		
Outdoor / Outdoor (waterproofing)	via APP /	■ / -	■ <i>I</i> -
Dark Wash / Easy Care Plus	via APP	-	-
Lingerie / Towels	- / via APP	-1-	- / -
Curtains / Duvet	- 1 -	-1-	- 1 -
Rinse / Spin / Drain	■ / - / -	■ / - / -	■ / - / -
Spin/Drain			
Prewash	•		
Extra Rinse / Rinse hold	■ / ■	■/■	■ / ■
Water Plus / Soak		■ / -	■ / -
Reduced ironing / Reduced noise		■ / -	<b>■</b> /-
Memory programmes		_	_
PERFORMANCE	_		
	A	A	
Energy efficiency class <sup>1</sup>	₫ A	â A	₫ A
Load capacity (kg)	1-10	1-10	1-9
Energy <sup>2</sup> / Water <sup>3</sup> (kWh / litres)	51 / 49	51 / 52	49 / 50
Programme duration <sup>4</sup> (h:mm)	3:55	3:55	3:40
Maximum spin speed (rpm) <sup>s</sup>	1600	1600	1600
Spin efficiency class	A	A	A
	72	74	74
Noise level (dB [A] re 1pW)			
Noise emission class	A	B	B
Duration of Quick Wash programme (minutes)	15/30	15/30	15/30
TECHNICAL INFORMATION			
Dimensions: H x W x D (inc. door porthole) (mm)	848 x 598 x 590 (638)	845 x 598 x 590 (636)	845 x 598 x 590 (636)
Door opening angle	188°	165°	165°
Depth with door open 90° (mm)	1090	1073	1073
Height adjustable by (mm)	12	12	12
Length of supply / drain hose (mm)	1500 / 1500	1500 / 1500	1500 / 1500
Length of mains cable (mm)	1600	2100	2100
Door hinge	Left-hand	Left-hand	Left-hand
	waveDrum	waveDrum	waveDrum
Drum type			wavebium
Drum type			
Drum type Drum Volume (litres) ACCESSORIES	70	70	70

Yes, model has this feature. – Feature not available for this model.

On an energy-efficiency class scale from A to G, <sup>2</sup> Energy consumption in kWh/100 operating cycles (using Eco 40-60 programme).
 Water consumption in litres/operating cycle (using Eco 40-60 programme). 4 Duration of Eco 40-60 programme. <sup>5</sup> The specified value is rounded.

Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

#### **1Q**700 WG56B2A1GB

Freestanding washing machine White 1600rpm spin speed



Ľ DESIGN AWARD 2023 reddot winner 2023

Home Connect



APPLIANCE TYPE	FREESTANDING WASHING MACHIN
Design family	iQ 700
Model number	WG56B2A1GB
Colour	White
KEY FEATURES	
smartFinish	
Detergent Scan	
Mini Load	
Home Connect	
i-Dos intelligent dosing system	
powerSpeed 59'	
varioSpeed	
Reload function	
iQDrive®	
antiVibration design	
stainRemoval System	
ADDITIONAL FEATURES	
Variable temperature / Variable spin	
Drum interior light	
Display Centrel papel lock	LED
Control panel lock	
Delay start by (h)	24
Drum Clean programme	via APP
Water protection system	AquaStop
STANDARD PROGRAMMES	
Eco 40-60	
Cottons	
Easy Care / Mixed	
Delicate/Silk / Wool	1
ADDITIONAL PROGRAMMES / FUNCTIONS	
Auto programme	
Hygiene	via APP
Rapid 15' / Rapid 30'	
Shirts	via APP
Outdoor / Outdoor (waterproofing)	-/-
Dark Wash/Easy Care Plus	via APP
Lingerie / Towels	-1-
Curtains / Duvet	- / via APP
Rinse / Spin / Drain	■1-1-
Spin/Drain	
Prewash	
Extra Rinse / Rinse hold	
Water Plus / Soak	
Reduced ironing / Reduced noise	
Memory programmes	
PERFORMANCE	
Energy efficiency class <sup>1</sup>	A
,,	₫ A
Load capacity (kg)	1-10
Energy² / Water³ (kWh / litres)	51 / 49
Programme duration <sup>4</sup> (h:mm)	3:55
Maximum spin speed (rpm) <sup>s</sup>	1600
Spin efficiency class	A
Noise level (dB [A] re 1pW)	72
Noise emission class	A
Duration of Quick Wash programme (minutes)	15/30
TECHNICAL INFORMATION	
Dimensions: H x W x D (inc. door porthole) (mm)	848 x 598 x 590 (638)
Door opening angle	188°
Depth with door open 90° (mm)	1090
Height adjustable by (mm)	12
Length of supply / drain hose (mm)	1500 / 1500
Length of supply r drain nose (mm) Length of mains cable (mm)	1600
Door hinge	5667
5	Left-hand
Drum type Drum Volume (litres)	waveDrum
	70
ACCESSORIES	WX975600

(using Eco 40-60 p

### Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

### Freestanding washing machine

tainRemoval System	
ADDITIONAL FEATURES	
/ariable temperature / Variable spin	
Drum interior light	
Display	LED
Control panel lock	
Delay start by (h)	24
Drum Clean programme	via APP
Vater protection system	AquaStop
TANDARD PROGRAMMES	
co 40-60	
Cottons	
asy Care / Mixed	1
Delicate/Silk / Wool	1
ADDITIONAL PROGRAMMES / FUNCTIONS	
luto programme	
łygiene	via APP
tapid 15' / Rapid 30'	
hirts	via APP
Outdoor / Outdoor (waterproofing)	-/-
Dark Wash/Easy Care Plus	via APP
ingerie / Towels	-1-
Curtains / Duvet	– / via APP
linse / Spin / Drain	1-1-
pin/Drain	
rewash	
xtra Rinse / Rinse hold	
Vater Plus / Soak	
teduced ironing / Reduced noise	
Nemory programmes	
PERFORMANCE	
nergy efficiency class <sup>1</sup>	<u>a</u>
oad capacity (kg)	1-10
nergy² / Water³ (kWh / litres)	51/49
rogramme duration <sup>4</sup> (h:mm)	3:55
/aximum spin speed (rpm) <sup>s</sup>	1600
pin efficiency class	A
loise level (dB [A] re 1pW)	72
loise emission class	А
Duration of Quick Wash programme (minutes)	15/30
ECHNICAL INFORMATION	
Dimensions: H x W x D (inc. door porthole) (mm)	848 x 598 x 590 (638)
Door opening angle	188°
Depth with door open 90° (mm)	1090
leight adjustable by (mm)	12
ength of supply / drain hose (mm)	1500 / 1500
ength of mains cable (mm)	1600
Door hinge	Left-hand
0rum type	waveDrum
Drum Volume (litres)	70
ACCESSORIES	
loor securing component	WX975600
Yes, model has this feature.         – Feature not available           On an energy-efficiency class scale from A to G. <sup>2</sup> Energy corycles (using Eco 40-60 programme). * Water cosumption in using Eco 40-60 programme). * Duration of Eco 40-60 program	for this model. Isumption in kWh/100 operating litres/operating cycle

#### Washing machines | Freestanding laundry appliances





### Washer dryers

### 5 year warranty

Home Connect





#### Q700 WN54C2ATGB

Freestanding washer dryer Silver 1400rpm spin speed



O Home Connect



pecifications	Available from May 2024
APPLIANCE TYPE	FREESTANDING WASHER DRYEF
Design family Model number	WN54C2ATG8
Colour	Silver
KEY FEATURES	
-Dos intelligent dosing system	
Home Connect	
iQDrive®	
varioSpeed	
Reload facility	
autoDry function	-
selfCleaning Condenser	
ADDITIONAL FEATURES	-
Time delay/Time remaining	
Control panel lock	Anustan
Water protection system PROGRAMMES	AquaStop
smartFinish	
Hygiene	
rapid15'	
Wash & Dry 60 mins	Wash & Dry 45'
Cottons	
Easy-care programme	
Wool programme	
Delicates/Silk	
Intensive Dry	
Gentle Dry	
myTime Wash & Dry	
myTime Dry	
Rinse	
Spin/Drain	
Memory	
Drum Clean	
Outdoor (Waterproofing)	
Shirts	
Mixed Fabrics	
Reduced noise wash/dry	
Reduced Ironing	
Extra Rinse Water level increase option	
Pre wash	_
Variable Temperature/Spin	
PERFORMANCE/TECHNICAL INFORMATION	
Energy efficiency class washing and drying <sup>1</sup>	1 D
	<u>u</u>
Energy efficiency class washing <sup>2</sup>	<u>d</u>
Energy <sup>3</sup> / Water <sup>4</sup> washing and drying (kWh / litres)	305/75
Energy <sup>s</sup> / Water <sup>e</sup> washing (kWh / litres)	52/50
Load capacity washing and drying / washing (kg)	1-6 / 1-10.5
Programme duration <sup>7</sup> washing and drying / washing (h:mm)	8:20 / 4:00
Spin efficiency class	В
Spin speed® (rpm)	1400
Noise level (dB [A] re 1pW)	70
Noise emission class	A
Dimensions: H x W x D (inc. door porthole) (mm)	848 x 598 x 622 (645)
Door opening angle	125°
Depth with door open 90° (mm)	1142
Height adjustable by (mm)	12
Length of supply / drain hose (mm)	1500 / 1500
Length of mains cable (mm)	2100
Door hinge	Left-hand
Drum type Drum volume (litres)	waveDrum 65

 <sup>1,2</sup> On an energy-efficiency class scale from A to G.
 <sup>3</sup> Energy consumption in kWh/100 complete operating cycles (using Eco 40-60 programme).
 <sup>4</sup> Water consumption in litres/complete operating cycle (using Eco 40-60 programme).
 <sup>5</sup> Energy consumption in kWh/100 wash cycles (using Eco 40-60 programme).
 <sup>6</sup> Water consumption in litres/wash cycle (using Eco 40-60 programme).
 <sup>7</sup> Duration of Eco 40-60 programme, complete operating cycle / wash cycle.
 <sup>8</sup> The procified value is rounded. <sup>8</sup> The specified value is rounded.

\*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

PPLIANCE TYPE	FREESTANDING WASHER DF
esign family	iQ 500
odel number	WN54G1A1GB
blour	White
EY FEATURES	_
Dos intelligent dosing system	
ome Connect	-
Drive® riscand	
and facility	
eload facility	
utoDry function	
elfCleaning Condenser	
DDITIONAL FEATURES	
ne delay/Time remaining	
ntrol panel lock	Multiple
ater protection system	Multiple water protection
OGRAMMES artFinish	_
giene	-
id15'	
sh & Dry 60 mins	
ttons	
sy-care programme	
ool programme	
licates/Silk	
ensive Dry	
ntle Dry	
Time Wash & Dry	-
Time Dry	-
ise	
n/Drain	
mory Im Cloan	-
um Clean	-
tdoor (Waterproofing)	
rts	-
ed Fabrics	
luced noise wash/dry	-
Juced Ironing	
ra Rinse	-
ter level increase option	
wash	
iable Temperature/Spin	
RFORMANCE/TECHNICAL INFORMATION	
ergy efficiency class washing and drying <sup>1</sup>	
ergy efficiency class washing <sup>2</sup>	Î A
ergy <sup>3</sup> / Water <sup>4</sup> washing and drying (kWh / litres)	306/82
ergy <sup>s</sup> / Water <sup>e</sup> washing (kWh / litres)	51/52
d capacity washing and drying / washing (kg)	1-6 / 1-10.5
gramme duration <sup>7</sup> washing and drying / washing (h:mm)	8:40 / 3:59
n efficiency class	B
n speed® (rpm)	1400
se level (dB [A] re 1pW)	70
se emission class	A
ensions: H x W x D (inc. door porthole) (mm)	848 x 598 x 590 (635)
or opening angle	165°
oth with door open 90° (mm)	1072
ight adjustable by (mm)	12
ngth of supply / drain hose (mm)	1500 / 1500
ngth of mains cable (mm)	2100
oor hinge	Left-hand
im type	waveDrum
m volume (litres)	65

Freestanding washer dryer

<sup>1,2</sup> On an energy-efficiency class scale from A to G.
 <sup>3</sup> Energy consumption in kWh/100 complete operating cycles (using Eco 40-60 programme).
 <sup>4</sup> Water consumption in litres/complete operating cycle (using Eco 40-60 programme).
 <sup>5</sup> Energy consumption in kWh/100 wash cycles (using Eco 40-60 programme).
 <sup>8</sup> Water consumption in itres/wash cycle (using Eco 40-60 programme).
 <sup>9</sup> Duration of Eco 40-60 programme, complete operating cycle / wash cycle.
 <sup>8</sup> The specified value is rounded.

\*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.



### Tumble dryers

### Q 700 WQ46B2CXGB

Freestanding tumble dryer Silver inox



Ľ DESIGN AWARD 2023 red<mark>dot</mark> winner 2023

Home Connect

Heat pump 0 intelligent Cleaning System 10

Freestanding tumble dryer specifications	
APPLIANCE TYPE	FREESTANDING TUMBLE DRYER
Design family	iQ 700
Model number	WQ46B2CXGB
Colour	Silver inox
KEY FEATURES	
Home Connect	
Heat pump	
smartFinish	
intelligentDry	
easyClean filter	
selfCleaning condenser	
antiVibration design	
ADDITIONAL FEATURES	
Sensor drying	
Display	LED
Anti-crease cycle (mins)	120
Time delay / Time Remaining	
Drum interior light	
Water container full / Blocked filter warning indicator	
Control panel lock	
PROGRAMMES / FUNCTIONS	
Cotton	
Easy Care	
Mixed Fabrics	
Allergy Plus / Hygiene	
Lingerie	 Via APP
Wool Finish	
Wool in drying basket (model includes drying basket)	
Towels	
Rapid 40 min	
Jeans	
Shirts	
Bed Linen Down Wear	
Duvet Pillows	-
Outdoor	
Time programme cold	Via APP
Time programme warm	
Reduced ironing	
Memory programme	
PERFORMANCE	
Energy efficiency class	A+++
Capacity cotton (kg)	9
Condensation efficiency class	В
Condensation efficiency for standard cotton programme –	91%
Full and partial load	
Noise level (dB [A] re 1pW)	59
TECHNICAL INFORMATION	
Dimensions: H x W x D (inc. door porthole) (mm)	842 x 598 x 613 (651)
Door opening angle	180°
Depth with door open 90° (mm)	1105
Height adjustable by (mm)	15
Length of mains cable (mm)	1450
Door hinge	Right-hand reversible
Can be used with drain set	
Drain set included	
Cycle time Cotton, Full Load (Label) (min / cycle)	
	198
Drum volume (litres)	112
Compatible Stacking Kit (Standard / Pull out shelf)	WZ2751X / WZ2750X
OPTIONAL ACCESSORIES FOR TUMBLE DRYERS	
Cover plate Stacking kit	WZ20290
Stacking kit	WZ2751X
Stacking kit with pullout shelf	WZ2750X

5 year warranty

Ų reddot winner 2023 DESIGN AWARD 2023 Home Connect

The programme cotton cupboard dry used at full and partial loads is the standard drying programme to which the information on the energy label refers. This is the most efficient programme in terms of energy consumption for cotton. Annual consumption is based on 160 drying cycles. Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.



#### For specification details, please visit siemens-home.bsh-group.com/uk and download a full specification sheet. 290

For the full range of accessories, please visit our online accessory shop at siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

	* 5year warranty	Tumble dryers	Freestanding laundry appliances
	Wananky		
	<i>e</i>		
	reddot winner 2023		
	AWARD 2023	5 year warranty	5 year
	O Home Connect	warranty	warranty
	- (0)		()
		0	
	( Second Law		
For each or discrete structures			
Freestanding tumble dryer specifications			COLT MARK
APPLIANCE TYPE Design family	iQ700	FREESTANDING TUMBLE DRYERS	iQ]300
Model number	WQ46B2C9GB	WQ45G209GB	WT45N203GB
Colour	White	White	White
KEY FEATURES Home Connect		_	_
Heat pump	•		-
smartFinish		-	-
intelligentDry easyClean filter			-
selfCleaning condenser		-	-
antiVibration design			
ADDITIONAL FEATURES	_	_	_
Sensor drying Display	LED	LED	LED
Anti-crease cycle (mins)	120	60	120
Time delay / Time Remaining			
Drum interior light	<b>•</b>	•	
Water container full / Blocked filter warning indicator Control panel lock			
PROGRAMMES / FUNCTIONS	-	-	-
Cotton		•	
Easy Care			<b>—</b>
Mixed Fabrics Allergy Plus / Hygiene			
Lingerie	Via APP		
Wool Finish	-	•	
Wool in drying basket (model includes drying basket) Towels		-	
Rapid 40 min			
Jeans	-	-	-
Shirts Bed Linen			
Down Wear	-	-	_
Duvet	-		-
Pillows Outdoor	-		-
Time programme cold	Via APP	-	
Time programme warm			
Reduced ironing		•	
Memory programme PERFORMANCE		-	_
Energy efficiency class	A***	A**	<b>B</b>
Capacity cotton (kg)	9	9	8
Condensation efficiency class	В	В	В
Condensation efficiency for standard cotton programme – Full and partial load	91%	86%	88%
Noise level (dB [A] re 1pW)	59	64	63
TECHNICAL INFORMATION			
Dimensions: H x W x D (inc. door porthole) (mm)	842 x 598 x 613 (651) 180°	842 x 598 x 613 (648) 170°	842 x 598 x 613 (651) 175°
Door opening angle Depth with door open 90° (mm)	1105	170°	1105
Height adjustable by (mm)	15	15	15
Length of mains cable (mm)	1450	1450	1450
Door hinge Can be used with drain set	Right-hand reversible	Right-hand	Right-hand
Drain set included			
Cycle time Cotton, Full Load (Label) (min / cycle)	198	173	137
Drum volume (litres) Compatible Stacking Kit (Standard / Pull out shelf)	112 WZ27510 / WZ27500	112 WZ27410 / WZ27400	112 WZ11410 / WZ20400
OPTIONAL ACCESSORIES FOR TUMBLE DRYERS	WE2/310/ W22/300	W22/10/W22/400	W2117107 W220400
Cover plate	WZ20290	WZ20290	WZ20290
Stacking kit	WZ27510	WZ27410	WZ11410

specifications	QUETAAK		QUET HAUK
APPLIANCE TYPE		FREESTANDING TUMBLE DRYERS	
Design family	iQ 700	iQ500	iQ 300
Model number	WQ46B2C9GB	WQ45G209GB	WT45N203GB
Colour	White	White	White
KEY FEATURES	White	Willte	Witte
Home Connect		-	_
Heat pump smartFinish			-
		-	-
intelligentDry		-	-
easyClean filter	-	-	
selfCleaning condenser			
antiVibration design			-
ADDITIONAL FEATURES	_	_	_
Sensor drying			
Display	LED	LED	LED
Anti-crease cycle (mins)	120	60	120
Time delay / Time Remaining			
Drum interior light			
Water container full / Blocked filter warning indicator	■ / ■		■ / ■
Control panel lock			
PROGRAMMES / FUNCTIONS			
Cotton			•
Easy Care			
Mixed Fabrics			
Allergy Plus / Hygiene			
Lingerie	Via APP		
Wool Finish	-		
Wool in drying basket (model includes drying basket)			
Towels			_
Rapid 40 min			•
Jeans			
Shirts	_		
Bed Linen	-		-
Down Wear			
Duvet	-		-
Pillows	-		
Outdoor			
Time programme cold	Via APP	-	
Time programme warm			
Reduced ironing			
Memory programme		-	-
PERFORMANCE			
Energy efficiency class	A+++	A++	₫ B
Capacity cotton (kg)	9	9	8
Condensation efficiency class	B	B	B
-	91%	86%	88%
Condensation efficiency for standard cotton programme – Full and partial load	9170	80%	0070
Noise level (dB [A] re 1pW)	59	64	63
TECHNICAL INFORMATION			
Dimensions: H x W x D (inc. door porthole) (mm)	842 x 598 x 613 (651)	842 x 598 x 613 (648)	842 x 598 x 613 (651)
Door opening angle	180°	170°	175°
Door opening angle Depth with door open 90° (mm)			
Height adjustable by (mm)	1105	1096	1105
	15	15	15
Length of mains cable (mm)	1450	1450	1450
Door hinge	Right-hand reversible	Right-hand	Right-hand
Can be used with drain set			
Drain set included	<b>—</b>		
Cycle time Cotton, Full Load (Label) (min / cycle)	198	173	137
Drum volume (litres)	112	112	112
Compatible Stacking Kit (Standard / Pull out shelf)	WZ27510 / WZ27500	WZ27410 / WZ27400	WZ11410 / WZ20400
OPTIONAL ACCESSORIES FOR TUMBLE DRYERS			
Cover plate	WZ20290	WZ20290	WZ20290
		W727440	WZ11410
Stacking kit	WZ27510	WZ27410	WZ11410

The programme cotton cupboard dry used at full and partial loads is the standard drying programme to which the information on the energy label refers. This is the most efficient programme in terms of energy consumption for cotton. Annual consumption is based on 160 drying cycles. Data valid in this table as of April 2024. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.24 – 31.03.25. T&C's apply. Online registration required.



#### Tumble dryers | Freestanding laundry appliances





# Intelligent Care, Our award-winning customer service team

292



xcellend

#### **Dedicated Siemens Service**

With our dedicated team of trained and qualified engineers available across the United Kingdom\*, each having undergone over 400 hours of training, you can be confident that your Siemens appliances are in the safest of hands.

#### Customer service.

#### Trust Siemens Customer Service to help with the following:

- · Offer product advice on using our appliance or help with choosing a new Siemens appliance.
- Register a Siemens appliance and extend the warranty.
- Arrange a repair for a Siemens appliance by one of our Siemens engineers.\*
- · Locate and buy replacement spare parts and accessories.

Call us on: UK: 0344 892 8999 IE: 01450 2655 For opening hours, please visit our website.

Calls are charged at the basic rate, please check with the relevant telephone service provider for exact charges.

\* In some areas of the UK and Ireland we use selected and approved service partners to carry out repairs on our behalf where the repair price and process may vary.



#### Online help.

#### Prefer to receive help online?

Siemens also offers a high quality comprehensive range of online services. Our online support offers help getting familiar with our appliances, find user manuals, browse FAQ's, get useful tips and have full control over an engineer booking.

Visit our online customer service portal at: UK: www.siemens-home.bsh-group.com/uk/customer-service/ IE: www.siemens-home.bsh-group.com/ie/customer-service/

#### Spare parts.



Siemens keeps a comprehensive range of replacement spare parts for up to 15 years. You can browse our exploded view diagrams on our store or speak to an advisor on the phone to help you locate and buy the spare parts you need.

Shop spare parts online at:

UK: www.siemens-home.bsh-group.com/uk/shop/search-parts IE: www.siemens-home.bsh-group.com/ie/shop/search-parts

Download and install Home Connect App		Partners brought to you by Home Connect O amazon alexa	N Pa ui Ca
			aj oi u: m co
Apple App Store	Googl	e Play Store	D

#### Repair service.



If a Siemens appliance needs a repair, we are here to help. Our team of locally based engineers are employed and trained by Siemens, which gives them unrivalled knowledge and expertise to repair our appliances.\*

It is easy to book, and manage an engineer visit online or via our call centre (see left for contact details).

#### Book or manage a repair online at:

UK: www.siemens-home.bsh-group.com/uk/customer-service/repair IE: www.siemens-home.bsh-group.com/ie/customer-service/repair

#### Online shop.

#### Accessories and cleaning products.

Well maintained appliances last longer, this is why we offer everything needed to look after any of our appliances on the Siemens online store. Our tested and approved cleaning and care products can be found there, along with other accessories ranging from a water filter for fridges, to a Teppanyaki grill plate for hobs.

#### Shop online at:

UK: www.siemens-home.bsh-group.com/uk/shop IE: www.siemens-home.bsh-group.com/ie/shop

#### More support with the Home Connect app.

Pairing a Siemens home appliance with the Home Connect app inlocks additional services including service support. The Home Connect app can provide useful push notifications when an appliance needs attention, such as when the filters need replacing or a clean care cycle is needed. Useful reminders will also let the user know when detergent, rinse aid and salt are running low. User nanuals, self-help tips, appliance information and customer service contact details are also available directly from the app when needed.

Download the Home Connect app for more info.

# Warranties and Registration

#### **Register** my appliance

Siemens recommends that all home appliances are registered to ensure we can easily contact customers in the event of an important product update. For more information about registering appliances of all brands, please visit: www.registermyappliance.org.uk

#### 5 year warranty



From time to time, Siemens may present additional warranties on either products or defined components of a product which are time limited offers.

Offer dates: 01.04.24 - 31.03.25. Online registration required. To check if a product qualifies, please contact us, scan the QR code or go online at https://www. siemens-home.bsh-group.com/uk/customer-service/ siemens-warranties

To register call: UK: 0344 892 8999 IE: 01450 2655

Or register online: UK: www.siemens-home.bsh-group.com/uk IE: www. siemens-home.bsh-group.com/ie




#### 2 year warranty

All Siemens home appliances have a Siemens two year manufacturer's warranty as standard to protect against manufacturing or material faults and defects during this warranty period.



10 Year Compressor Drive Warranty

Available on selected Siemens fridges and freezers, this warranty covers defects in the compressor motor



Protects against manufacturing or material faults and defects to the iQdrive motor only during this warranty period. Applies to selected Siemens laundry appliances only.



294



To register call: UK: 0800 519 2116 IE: 01230 0344

Or register online: UK: www.siemens-home.bsh-group.com/uk ROI: www. siemens-home.bsh-group.com/ie



10 Year Anti-Rust Warranty for Dishwashers Protects against rust in the inner cavity of the appliance during this warranty period. Applies to all Siemens dishwasher appliances only.



#### Lifetime AquaStop Warranty

A lifetime warranty to protect against water damage caused by a defective AquaStop system. Applies to selected Siemens laundry and dishwasher appliances only.

## Notes


#### Models shown on front left to right: HM778GMB1B single oven, CT718L1B0 coffee machine, BI710C1B1B warming drawer, CM778GNB1B compact oven, BI710C1B1B warming drawer.

Siemens, a division of BSH Home Appliances Ltd, Grand Union House, Old Wolverton Road, Wolverton, Milton Keynes, MK12 5PT Tel: 0344 892 9040

siemens-home.bsh-group.com/uk

Showroom Siemens London, Home of studioLine, 14 Wigmore Street, London, W1U 2RE Tel: 0330 134 3100 Email: SiemensLondon@Siemens-Home.BSH-Group.com

BSH Home Appliances Ltd, M50 Business Park, Ballymount, Dublin 12 Tel: 1890 626041

siemens-home.bsh-group.com/ie

#### Disclaimer

This brochure is current as from the publication date and supersedes all previous brochures for these products. Whilst BSH Home Appliances Ltd believes that all information contained within this brochure is correct at the time of going to print, no representation or warranty, express or implied, is or will be made and no responsibility or liability is or will be accepted by BSH Home Appliances Ltd in relation to the accuracy or completeness of this information and any liability is expressly disclaimed. To the extent permitted by law, BSH Home Appliances Ltd expressly excludes: i) all conditions, warranties and other terms which might otherwise be implied by statute, common law or the law of equity and ii) any liability for any direct, indirect or consequential loss or damage (including, without limitation, damages for loss of business or loss of profits) arising in contract, tort or otherwise from the use of or reliance on any information contained within this brochure or from any action or decision taken as a result of such use or reliance. BSH Home Appliances Ltd reserves the right to modify technical data and all other information contained within this brochure without notice. All rights reserved.

No part of this publication may be reproduced in any form or without the prior written permission of BSH Home Appliances Ltd.

This brochure should not be regarded as an infallible guide nor as an offer of sale for a particular product.

Due to variables in the reproduction process, colours of actual products may vary slightly from those depicted. We recommend a visit to a Siemens dealer to confirm that specifications and colours are to your satisfaction.

Valid from April 2024 SIEMBIFS2024

### SIEMENS